

EDN[®]

RISC hardware
debug tools pg 43

PC chip sets reduce
chip count pg 57

Real-time Ada—Pt 3 pg 101


Real-time programming
series—Part 2 pg 115

ELECTRONIC TECHNOLOGY FOR ENGINEERS AND ENGINEERING MANAGERS



Special Report:
Making the transition
to Futurebus+ pg 86

Naturally the world's broadest range of electronic components includes

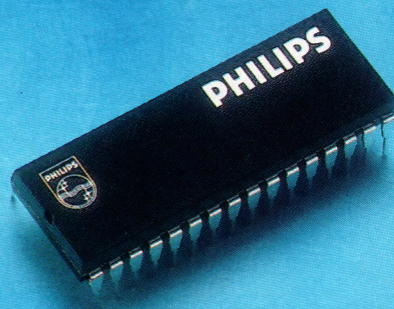

Memories.

With an established reputation as an international supplier of high-quality electronic components, it should come as no surprise that Philips is also a supplier of memory products.

In fact, we offer a large and growing range of memories, including PROMs, EPROMs, EEPROMs and SRAMs. We make them in

Europe and North America to ensure a reliable, uninterrupted supply of these vital components. And of course, we back them up with a worldwide sales and service network.

For more information on how to secure your strategic supply of our memory devices, call Philips Components or your local distributor.


Philips Components

Argentina
 (01) 541-4261
Australia
 (02) 439 3322
Austria
 (0222) 60 101-820
Belgium
 (02) 5256111
Brazil
 (011) 211-2600
Canada
 SIGNETICS
 (416) 626-6676
Chile
 (02) 77 38 16
Colombia
 (01) 2 49 7624
Denmark
 01-54 11 33
Finland
 358-0-50 261
France
 (01) 40 93 80 00
Germany (Fed. Republic)
 (040) 3296-0
Greece
 (01) 48 94 339/48 94 911
Hong Kong
 (01)-42 45 121
India
 (022) 49 30 311/49 30 590
Indonesia
 (021) 51 79 95
Ireland
 (01) 69 33 55
Italy
 (02) 6752.1
Japan
 (03) 740 5028
Korea (Republic of)
 (02) 794-5011
Malaysia
 (03) 73 45 511
Mexico
 (16) 18-67-01/02
Netherlands
 (040) 78 37 49
New Zealand
 (09) 605-914
Norway
 (02) 68 02 00
Pakistan
 (021) 72 57 72
Peru
 (014) 70 70 80
Philippines
 (019) 6831 21
Portugal
 (019) 6831 21
Singapore
 35 02 000
Spain
 (03) 301 63 12
Sweden
 (08-78 21 000
Switzerland
 (01) 488 22 11
Taiwan
 (886) 2-5005899
Thailand
 (02) 233-6330-9
Turkey
 (01) 17827 70
United Kingdom
 (01) 580 6833
United States
 SIGNETICS
 (408) 991-2000
Uruguay
 (02) 70-40 44
Venezuela
 (02) 241 75 09
Zimbabwe
 47211



PHILIPS

EXAR Fax/Data Combo Breaks the Barrier

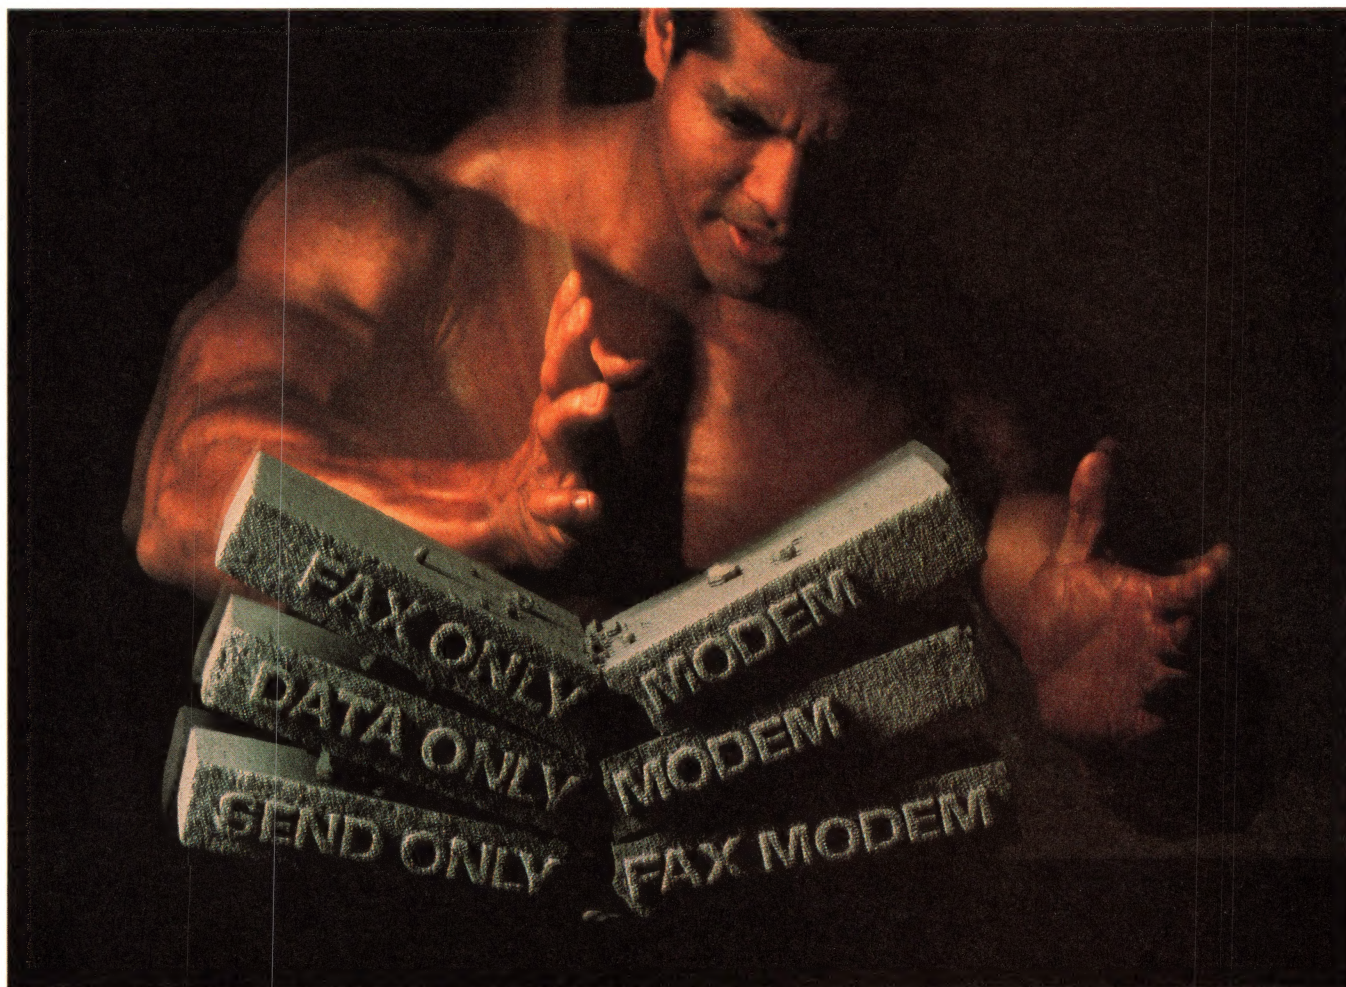

Break away from the competition

Break through the limitations of yesterday's Fax only, Send only Fax, and Data only modem products. With the XR-2900 Fax/Data combo you can offer 9600 BPS send/receive fax with 2400 BPS data modem at a very competitive price. Exar has broken the cost barrier of adding fax capability to 2400 BPS modems. Now, why would anyone want a modem without fax capability?

More features...

For a feature driven market the XR-2900 Fax/Data combo is supported with V.42bis, V.42 and MNP5 protocols, making it simply the most versatile and cost-effective solution on the market today. It is also fully supported with TR29 and T.30 firmware. With a flexible architecture and the "Extended AT" command set provided by Exar, you can easily create your own unique modem solutions.

Less power and space

XR-2900 is the perfect answer for the growing Laptop and Notebook PC markets that have critical space and power requirements. Ever increasing communication needs of these products can only be met by combining fax and data functions.

XR-2900 Fax/Data combo features

- V.29, V.27ter, V.21 (Ch 2) for Fax
- V.22 bis, V.22, 212A & 103 for Data
- Low power CMOS for Laptop & Notebook PCs
- CCITT V.42bis/V.42 support
- MNP5 for data compression in alternate mode
- DTMF generation and CPM (Call Progress Monitor)
- V.23 & V.21
- PLCC/QFP/DIP package options

Call EXAR today at (408) 434-6400 and discuss your new generation modem products with us. We have the most flexible range of modem products, the system knowledge and the application support to assist you in bringing your products to the market.

Put some muscle in your modems

EXAR ...the analog plus[™] company

Analog Plus is a trademark of EXAR Corporation.

Don't miss the most valuable A/D Converter Seminar of 1990

8 to 24 bits

dc to 4 MHz

Delta Sigma ADCs
Self-Calibrating ADCs
Error Budgeting
Anti-Aliasing
Grounding

Board Layout
Debugging
Test Techniques
Live Demonstrations
Latest Data Sheets

Weigh Scales
Medical
Digital Audio
Industrial Control
Seismic

Image Processing
Military
Instrumentation
Space
Modems

AL	Huntsville	Nov 28	CO	Colorado Springs	Aug 21	MI	Grand Rapids	Jul 30	OK	Tulsa	Dec 13
ALB	Calgary	Aug 23		Denver	Aug 22	MN	Minneapolis	Sep 13	ONT	Ottawa	Aug 2
	Edmonton	Aug 24	CT	Waterbury	Oct 2	MO	Kansas City	Dec 5		Toronto	Aug 1
AZ	Phoenix	Sep 11	FL	Clearwater	Oct 11		St. Louis	Dec 4	OR	Portland	Sep 7
	Tucson	Sep 12		Ft. Lauderdale	Oct 8	NC	Charlotte	Jul 25	PA	Ft. Washington	Aug 16
BC	Vancouver	Sep 5		Melbourne	Oct 9		Raleigh	Jul 24		Pittsburgh	Aug 30
CA	Los Angeles	Jul 11		Orlando	Oct 10	NH	Nashua	Oct 4	QBC	Montreal	Aug 3
	Sacramento	Jul 20	GA	Atlanta	Nov 29	NJ	Cherry Hill	Aug 15	TN	Knoxville	Nov 30
	San Diego	Oct 16	IA	Cedar Rapids	Dec 6		Edison	Aug 14	TX	Austin	Dec 10
	San Fernando	Jul 9	IL	Arlington Hts.	Nov 15		Saddlebrook	Aug 13		Dallas	Dec 12
	San Fernando	Oct 18		Oakbrook	Nov 16	NM	Albuquerque	Sep 10		Houston	Dec 11
	San Gabriel	Jul 12	IN	Fort Wayne	Oct 26	NY	Buffalo	Aug 7	UT	Salt Lake City	Dec 7
	San Jose	Jul 18		Indianapolis	Oct 24		Long Island	Aug 10	VA	Falls Church	Jul 26
	San Jose	Oct 19		Kokomo	Oct 25		Rochester	Aug 8	WA	Seattle	Sep 6
	Santa Barbara	Jul 9	MA	Andover	Oct 4		Syracuse	Aug 9	WI	Madison	Nov 14
	Oakland	Jul 19		Boxborough	Oct 3	OH	Cincinnati	Oct 23		Milwaukee	Nov 13
	Orange County	Jul 10		Newton	Oct 3		Cleveland	Aug 29			
	Orange County	Oct 17	MD	Baltimore	Jul 27		Columbus	Aug 28			
	Palo Alto	Jul 17	MI	Detroit	Jul 31		Dayton	Aug 27			

CALL CRYSTAL SEMICONDUCTOR TODAY FOR RESERVATIONS


1-800-888-5016

CRYSTAL


512-445-7222

CIRCLE NO. 101

BELL
2000 pts 50 kHz
Sample Rate

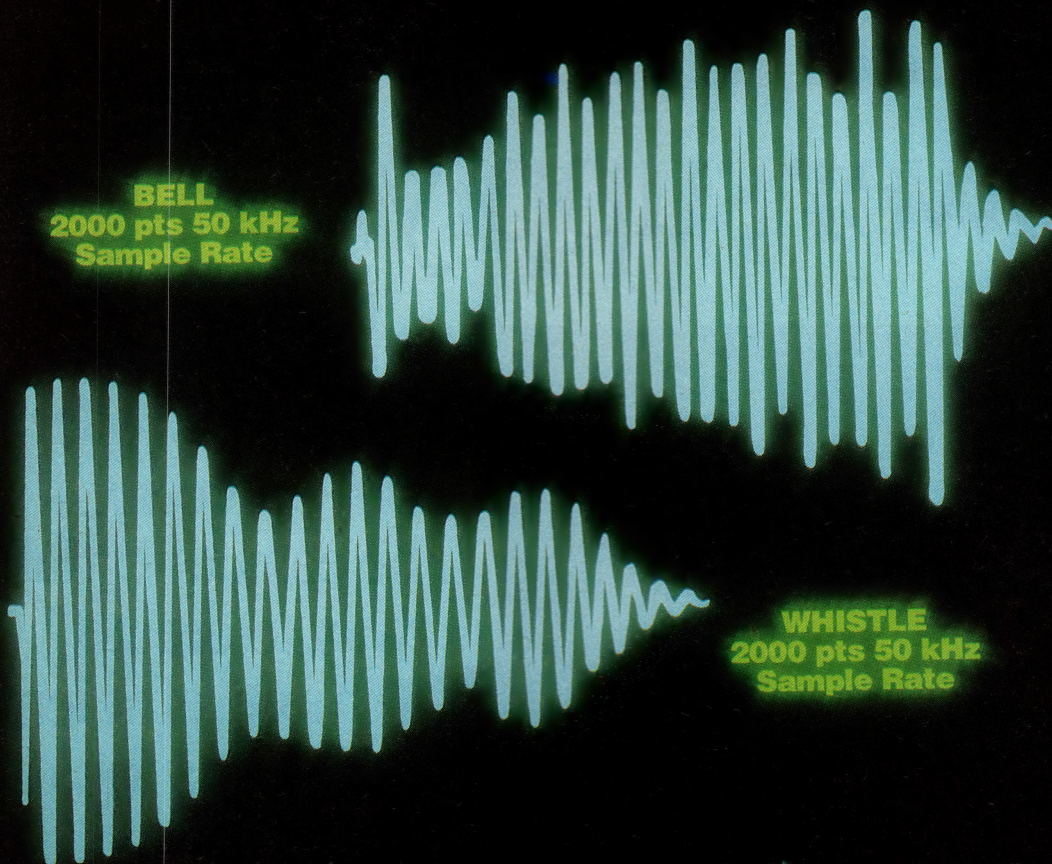

WHISTLE
2000 pts 50 kHz
Sample Rate

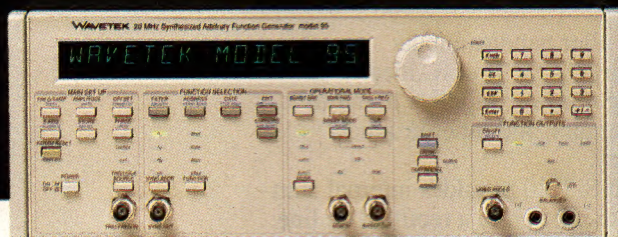

Our new function generator has all the bells and whistles.

In fact, it has any kind of waveform you can imagine. Because the Model 95 combines a high performance function generator with a powerful arbitrary generator.

As a function generator, Model 95 produces remarkably pure square waves, triangles and sines, from 1 mHz to 20 MHz with synthesized accuracy up to 0.001%. It has


the power to output 15 Vp-p into 50 Ω , and includes sweep, pulse and modulation modes plus four user-selectable output impedances. There's even an internal trigger generator for trigger, gate and burst.

If you'd rather be arbitrary, Model 95 gives you up to 128k of waveform memory to work with, and a sample rate of 20 MHz. Four different editing

modes help you produce even the most complicated wave shapes quickly and accurately, while analog and digital filters allow you to create the purest output possible.

For information about all the other bells and whistles you'll find on the Model 95, call Wavetek San Diego, Toll Free at **1-800-874-4835** today.

Get a handle on power supply design.

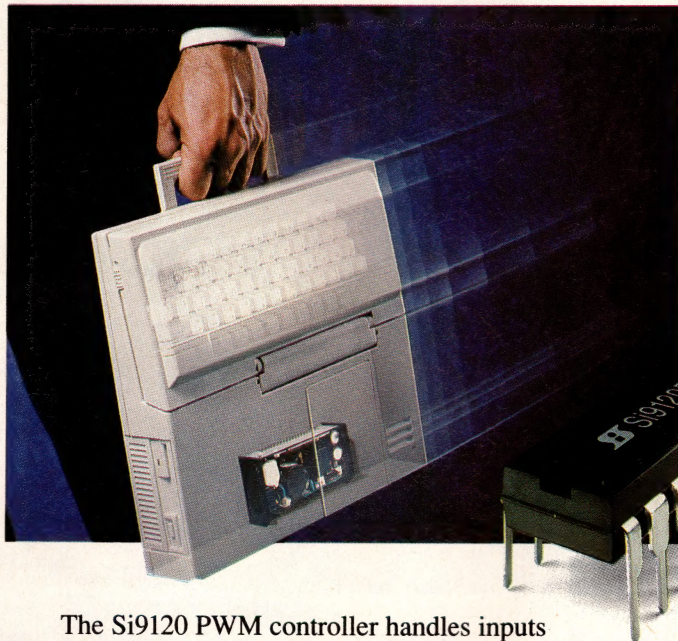

Universal-Input
PWM Controller
from Siliconix.
The easy, affordable
way to create
more efficient
designs for low
power systems.

The Si9120 PWM controller handles inputs from 50 V to 450 V. That's why it's the first IC ideally suited for 85- to 265- Vac input power supplies found in laptops, modems, battery chargers, and other products requiring maximum efficiency.

The easy-to-design-with Si9120 provides internal start-up circuitry to allow direct connection to a rectified ac line. And it lowers part count, raises reliability, and improves noise immunity.

All for 93¢.*

Parameter	Si9120	3844/5
Start-up Circuit Power Dissipation	0.004 W	1.400 W
Supply Current	1.5 mA	17.0 mA
Reference Accuracy	±2.0%	±3.2%
Current Limit Delay Time	150 ns	300 ns


Design more efficiency into your low power systems! Ask for our Si9120 Design Kit. Call our toll-free hotline now! 1-800-554-5565, ext. 954.



2201 Laurelwood Road, Santa Clara, CA 95054

©1990 Siliconix inc.

*100,000-piece price.

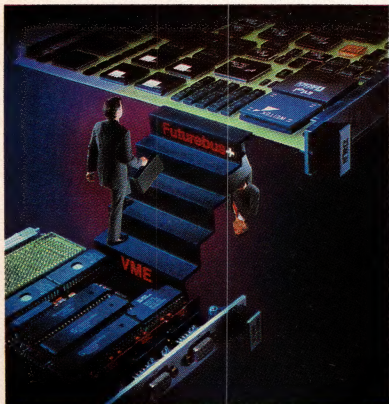

On the cover: Bridging the gap between Futurebus+ and other architectures is one way to get the new open-bus architecture to vendors. See the Special Report on pg 86. (Photo courtesy Force Computers Inc)

SPECIAL REPORT

Futurebus+

86

For some time now Futurebus+ touters have said that the architecture will lead us into the computing promised land. Though there is still work to be done, the journey may finally be ready to begin.—*John A Gallant, Associate Editor*



DESIGN FEATURES

Designers' guide to real-time Ada—Part 3 101

This article, the last in a series, describes the requirements that Ada runtime environments must meet and provides criteria for evaluating Ada vendors' runtime implementations.—*Benjamin M Brosgol, Alsys Inc*

Real-time programming—Part 2 115

Part 2 delves further into the nature of real-time programming. It addresses concerns that are unique to real time and describes how the programmer and the operating system handle these concerns.—*David L Ripps, Industrial Programming Inc*

TECHNOLOGY UPDATES

RISC hardware debug tools: Instruments spur RISC into the real-time race 43

RISC μ Ps' speed makes them candidates for the fastest embedded real-time systems. But designers may have to look to unfamiliar tools for debugging time-critical hardware/software interactions.—*Dan Strassberg, Associate Editor*




PC chip sets reduce chip count 57

IBM PC-compatible chip sets range from one to six chips and can give you caching facilities, a choice of buses, and power control.—*Chris Terry, Associate Editor*

Continued on page 7

EDN® (ISSN 0012-7515) is published 50 times a year (biweekly with 2 additional issues a month, except for February and September, which have 3 additional issues and July and December which have 1 additional issue) by Cahners Publishing Company, A Division of Reed Publishing USA, 275 Washington Street, Newton, MA 02158-1630. Terrence M McDermott, President; Frank Sibley, Senior Vice President/General Manager, Boston Division; Jerry D Neth, Senior Vice President/Publishing Operations; J J Walsh, Senior Vice President/Finance; Thomas J Dellamaria, Senior Vice President/Production and Manufacturing; Ralph Knupp, Vice President/Human Resources. Circulation records are maintained at Cahners Publishing Company, 44 Cook Street, Denver, CO 80206-5800. Telephone: (303) 388-4511. Second-class postage paid at Denver, CO 80206-5800 and additional mailing offices. POSTMASTER: Send address corrections to EDN®, PO Box 173377, Denver, CO 80217-3377. EDN® copyright 1990 by Reed Publishing USA; Ronald G Segel, Chairman and Chief Executive Officer; Robert L Krakoff, President and Chief Operating Officer; William M Platt, Senior Vice President. Annual subscription rates for nonqualified people: USA, \$109.95/year; Canada/Mexico, \$135/year; Europe air mail, \$165/year; all other nations, \$165/year for surface mail and \$250/year for air mail. Single copies are available for \$10. Please address all subscription mail to Ellen Porter, 44 Cook Street, Denver, CO 80206-5800.

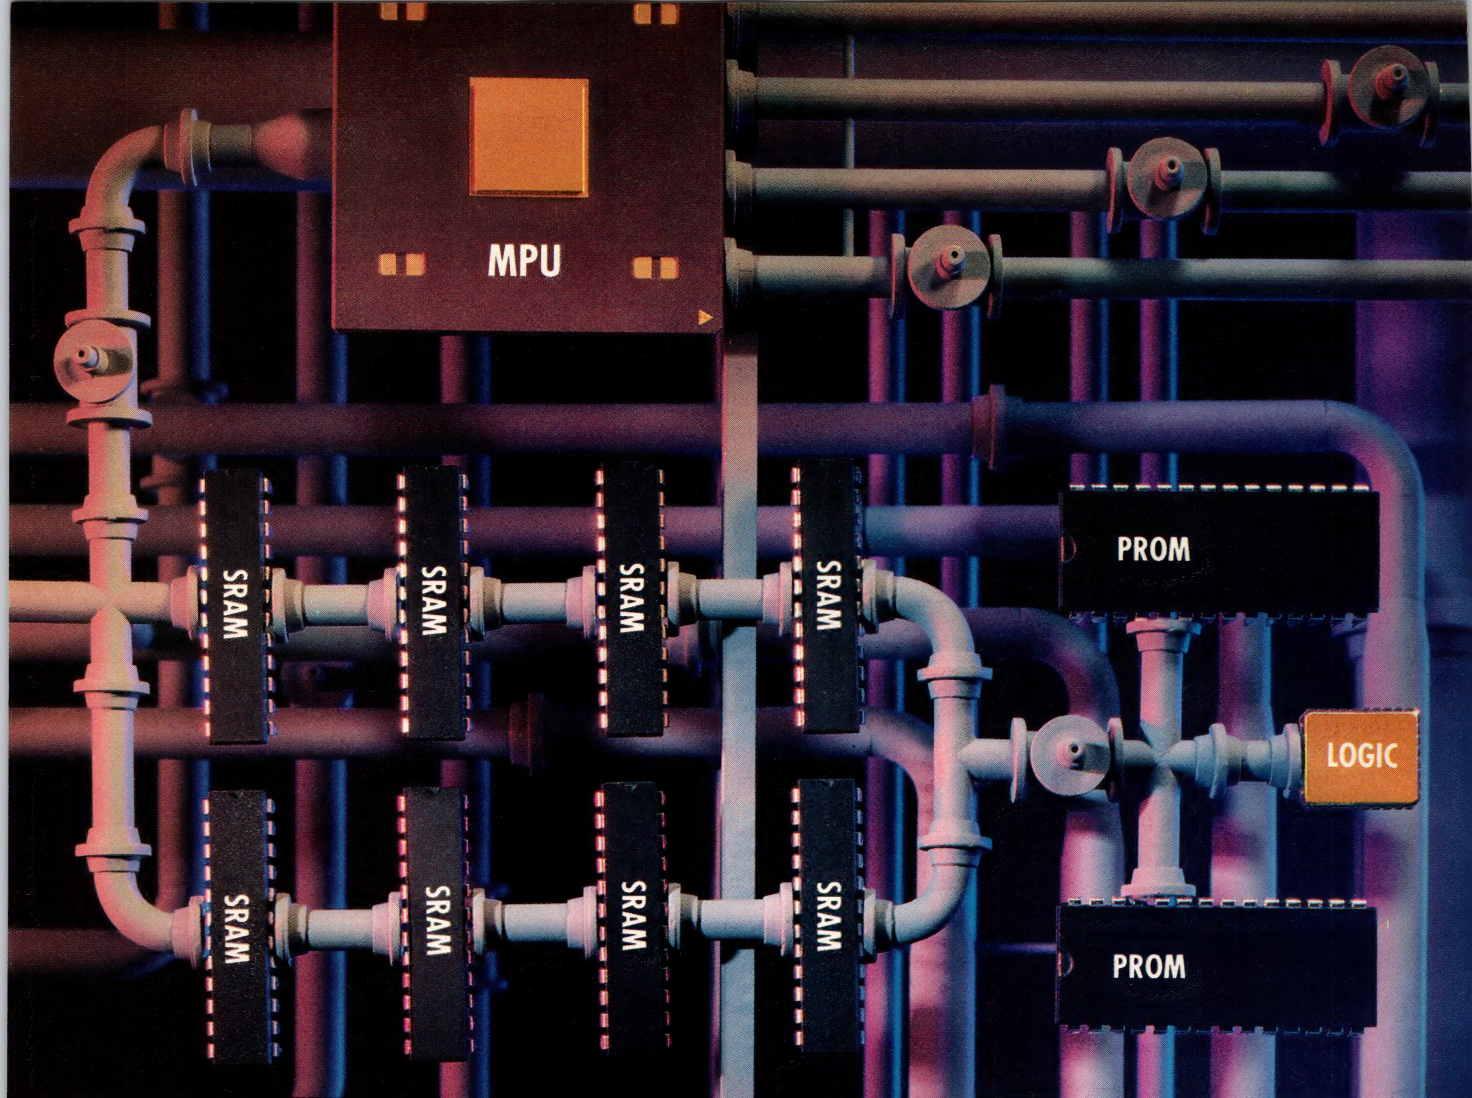

There's a much faster way around all this.

For applications such as embedded control, where space is at a premium, these new high density, high

256K PROM.

performance PROMs let you build a smaller system, or pack more functions into your existing space.

You save on more than space and SRAM part costs.

You save on power, because all these PROMs are in our proven, high performance, low power CMOS.


They are available in a wide variety of packaging, including plastic DIP, CERDIP, and PLCC.

They are erasable. That lets us test every part 100% before shipping, and lets you specify windowed, reprogrammable versions.

So if you need more memory in less space with less power, go direct with our ultra-fast 256K PROMs.

New Ultra-Fast 256K PROMs:

At 35 ns, these 300-mil parts are so fast you can run code right from PROM, eliminating SRAM and logic expense. You cut space and cost requirements significantly.



256K Registered CMOS PROM. 30 ns.



256K Registered CMOS PROM. 35 ns.

Call the Hotline for your free Data Book and get the full info on all our PROMs. 1-800-952-6300.*
Ask for Dept. C4H



32 K x 8 Power Switched CMOS EPROM. 35 ns.



256K Power Switched CMOS PROM. 35 ns.



CYPRESS
SEMICONDUCTOR

*1-800-387-7599 in Canada. (32) 2-672-2220 in Europe.
©1990 Cypress Semiconductor, 3901 North First Street,
San Jose, CA 95134. Phone: (408) 943-2600, Telex: 821032
CYPRESS SNU UD, TWX: 910-997-0753.

VP/Publisher
Peter D Coley

Associate Publisher
Mark J Holdreith

VP/Editor/Editorial Director
Jonathan Titus

Managing Editor
Joan Morrow Lynch

Assistant Managing Editor
Susan L Rastellini

Special Projects
Gary Legg

Home Office Editorial Staff
275 Washington St, Newton, MA 02158
(617) 964-3030

Tom Ormond, *Senior Editor*

Charles Small, *Senior Editor*

Susan Bureau, *Associate Editor*

Jay Fraser, *Associate Editor*

John A Gallant, *Associate Editor*

Michael C Markowitz, *Associate Editor*

Dave Pryce, *Associate Editor*

James P Scanlan, *Associate Editor*

Julie Anne Schofield, *Associate Editor*

Dan Strassberg, *Associate Editor*

Chris Terry, *Associate Editor*

Helen McElwee, *Senior Copy Editor*

James P Leonard, *Copy Editor*

Christine McElvenny, *Senior Production Editor*

Gabriella A Fodor, *Production Editor*

Brian J Tobey, *Production Editor*

Editorial Field Offices

Steven H Leibson, *Senior Regional Editor*

Boulder, CO: (303) 494-2233

Doug Conner, *Regional Editor*

Atascadero, CA: (805) 461-9669

J D Mosley, *Regional Editor*

Arlington, TX: (817) 465-4961

Richard A Quinell, *Regional Editor*

Aptos, CA: (408) 685-8028

Anne Watson Swager, *Regional Editor*

Wynnewood, PA: (215) 645-0544

Maury Wright, *Regional Editor*

San Diego, CA: (619) 748-6785

Brian Kerridge, *European Editor*

(603) 630782

(St Francis House, Queens Rd,

Norwich, NR1 3PN, UK)

Contributing Editors

Robert Pease, Don Powers,

David Shear, Bill Travis

Editorial Coordinator

Kathy Leonard

Editorial Services

Helen Benedict

Art Staff

Ken Racicot, *Senior Art Director*

Chinsoo Chung, *Associate Art Director*

Cathy Madigan, *Staff Artist*

Production/Manufacturing Staff

Andrew A Jantz, *Production Supervisor*

Sandy Wucinich, *Production Manager*

Kelly Brashears, *Production Assistant*

Deborah Hodin, *Production Assistant*

Diane Malone, *Composition*

Director of Art Department

Joan Kelly

Norman Graf, *Associate*

VP/Production/Manufacturing

Wayne Hultzky

Director of Production/Manufacturing

John R Sanders

Business Director

Deborah Virtue

Marketing Communications

Anne Foley, *Promotion Manager*

Pam Winch, *Promotion Assistant*

EDITORS' CHOICE

65

250-MHz digital storage oscilloscope

PRODUCT UPDATES

Logic analyzers 68

Rewritable 133M-byte optical drive 70

Intelligent peripheral controller 76

Four-channel arbitrary waveform generator 78

DESIGN IDEAS

Scrambler disguises voice signals 127

S/H circuit multiplexes op amp 128

8051 routine divides quickly 128

Inverters mimic interlocked switches 132

Micropower clock quashes spurious modes 132

Feedback and amplification 134

NEW PRODUCTS

Components & Power Supplies139

CAE & Software Development Tools142

Test & Measurement Instruments149

Computers & Peripherals154

Integrated Circuits162

PROFESSIONAL ISSUES

174

The keeper of the faith: a profile of Richard Stallman

DEPARTMENTS

News Breaks21

Signals & Noise29

Ask EDN31

Editorial33


Literature166

Career Opportunities182

EDN's International Advertisers Index187

Cahners Publishing Company, A Division of Reed Publishing USA ☐ Specialized Business Magazines for Building & Construction ☐ Research ☐ Technology ☐ Electronics ☐ Computing ☐ Printing ☐ Publishing ☐ Health Care ☐ Foodservice ☐ Packaging ☐ Environmental Engineering ☐ Manufacturing ☐ Entertainment ☐ Home Furnishings ☐ and Interior Design. Specialized Consumer Magazines for Child Care ☐ Boating ☐ and Wedding Planning.

Looking We m

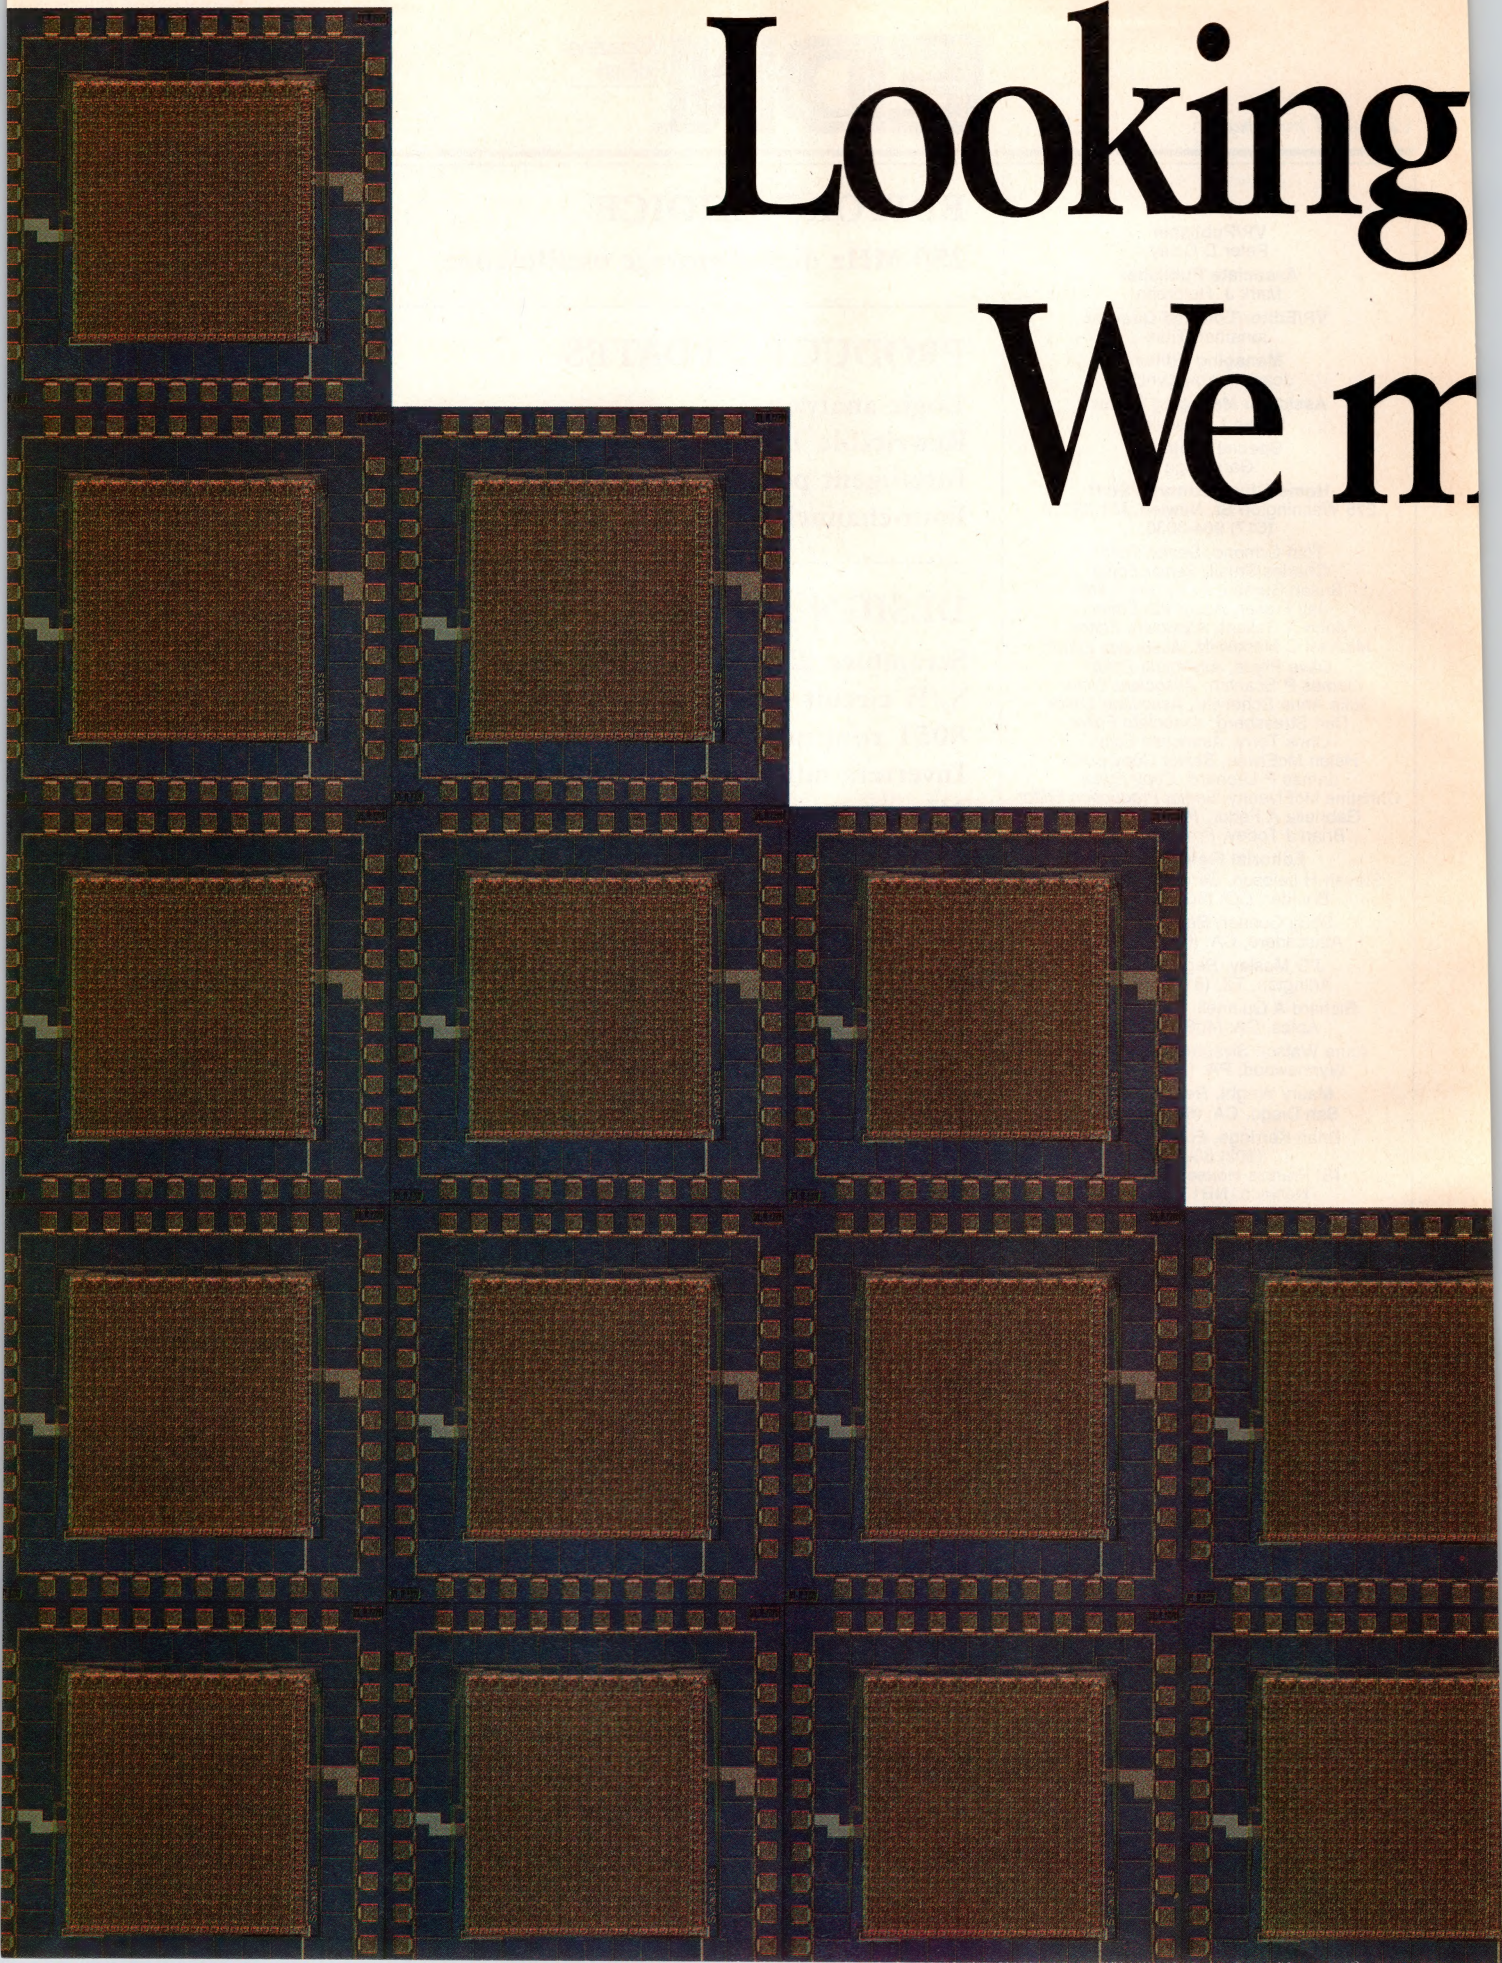

For lower NRE? Make it Tiny.

Here's How To Develop Analog/Digital ASICs In Less Time, For Less Money.

Now, for an absolutely tiny price, you can partition complex mixed mode ASICs and separately design and verify the critical segments through fabrication. Cost of fab will no longer stop you from a divide and conquer methodology. Use Tiny Chips and go a step at a time. Tiny Chips, available on Foresight multi-project wafer runs, reduce NRE costs and help you move confidently from prototypes into production.


Twelve packaged parts are available at a cost of just \$1,500. And Foresight runs are regularly scheduled, so development can be pipelined; some segments can be in design, some in fab, while others in test and debug... all at the same time.

Foresight runs support larger die sizes for characterization of completed designs prior to production.


As you might expect from the only foundry to guarantee quick turnaround, Tiny Chips are available in a mere 20-25 working days from CMOS runs supporting:



1.2, 1.5 and 2.0 micron feature sizes



2.0 micron buried channel CCDs




a 40 pin Tiny Chip pad frame supplied by Orbit

the DoD 2/1.2 micron CMOSN standard cell library with RAM and ROM generators

Getting started is easy as getting design rules and process information in our newly published Foresight User Manual.

If you are trying to build complex ASICs, without building up time and cost, Orbit's new Tiny Chip service may be the biggest news yet. To get more information in a hurry, contact Technical Marketing, Orbit Semiconductor, 1230 Bordeaux Drive, Sunnyvale, CA. Or call (408) 744-1800 or (800) 331-4617. In CA (800) 647-0222. FAX (408) 747-1263.



A subsidiary of Orbit Instrument Corporation.

What others promise, we guarantee.



© 1990 Hewlett-Packard Co. TMT&M029

Did you hear about
the optical attenuator
that fell from the sky?



It hit the ground running.

"Roger, Falcon 20, you're cleared for landing. Braking action advisory. Ice on the runway." The veteran pilot of the cargo plane had landed at Link Field before, but the tower's report was a cold reminder that the airstrip ended in a 75-foot cliff.

On touchdown, the jet skidded out of control. Within seconds, it shot off the cliff like a ski jumper and tumbled down the steep embankment, cargo flying in all directions.


Minutes later, rescue teams were helping the pilot and co-pilot from the wreckage. The pungent smell of jet fuel filled the air, so crews sprayed fire-retardant foam on everything. Including an HP optical attenuator which was on its way to a customer.

Two days later, our customer received the instrument. Fostering little hope, their engineers ran routine tests anyway. The optical attenuator not only survived, it passed all specifications.

Stories like this underscore why engineering managers give HP the highest rating for reliability. And we're always improving. Our Total Quality Control program has increased the quality of our products ten-fold over the last 10 years.

So, when design and manufacturing productivity are at stake, rely on HP. Because you never know when you'll have to hit the ground running.

There is a better way.



CIRCLE NO. 38

10BASE-T. Turnkey.

**You've Got Better Things
To Do With Your Design
Time (And Money) Than
Learning The Mysteries
Of Twisted Pair Ethernet.
Let Us Help.**

No other chip supplier knows its way around networks like Advanced Micro Devices: Backbones, LANs, WANs, you name it.

Just ask our chipset development partners at HP® and SynOptics™

AMD is a major, major maker of 10BASE-T transceivers. We sell the most cost-effective solution. Our silicon is CMOS, so we'll save you energy as well as time. And you can trust that we're compliant. (We helped write the standard.)

Are you starting development soon? What about now? Drop us a line and find out how.

For more information write "10BASE-T" on your letterhead and mail to: (In Europe) AMD Mail Operations, P.O. Box 4, Westbury-on-Trym, Bristol BS9 3DS United Kingdom (In Asia) Advanced Micro Devices Far East Ltd., Rm. 1201-2 Harcourt House, 39 Gloucester Road, Hong Kong, Attn: Andrew Ng, (In Japan) Advanced Micro Devices Japan Ltd., Shinjuku Kokusai Bldg., 6-6-2 Nishi-Shinjuku, Shinjuku-ku, Tokyo 160, Japan.
Bruxelles (02) 771 91 42 • Hannover area (0511) 73 60 85 • Hong Kong (5) 8654525 • London area (0483) 740440 • Manchester area (0925) 828008 • Milano (02) 3533241 • München (089) 41 14-0 • Osaka (06) 243-3250 • Paris (1) 49 75 10 10 • Seoul (02) 784-7598 • Singapore (65) 348 1188 • Stockholm (08) 733 03 50 • Stuttgart (0711) 62 33 77 • Taiwan (02) 7213393 • Tokyo (03) 345-8241 • Latin America, Fort Lauderdale, Florida/U.S.A. Tel: (305) 484-8600 Tlx: (510) 955-4261 amd ftl

Advanced Micro Devices 

If your CAE tools are telling you too little too late, consider this news from Teradyne. Now you can capture and analyze complex ASIC and VLSI board designs with unprecedented accuracy and ease, using our Vanguard™ schematic entry software and LASAR

simulator in Teradyne's MultiSim™

environment.

Here are CAE tools that work the

way you like to work.

They'll help you move quickly between

schematic and simu-

lation, and let you control simulation interactively. You'll get immediate feedback at every step.


Click on nodes you want to monitor and watch signal activity "live" on the schematic or in the logic analyzer window. By setting breakpoints, you can freeze the action when results aren't what you expect. In no time, you'll know where your design is

working and where it's not.

Got a glitch? Need to invert a signal?

Make cuts or jumps on schematic interconnections. Add or delete components.


If you find a problem, fix it and see the results in seconds, because we eliminate compilation for most common design changes.

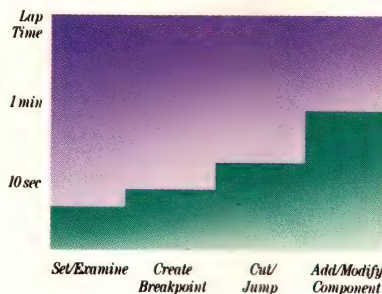


CAE for people to see how their

You'll see the effects of design changes instantly because we shortcut compilation for the modifications you make most frequently. This means you can try out "what-ifs" with record speed, reducing design-loop time from tens of minutes to tens of seconds.

Best of all, with CAE tools from Teradyne you can be sure that what

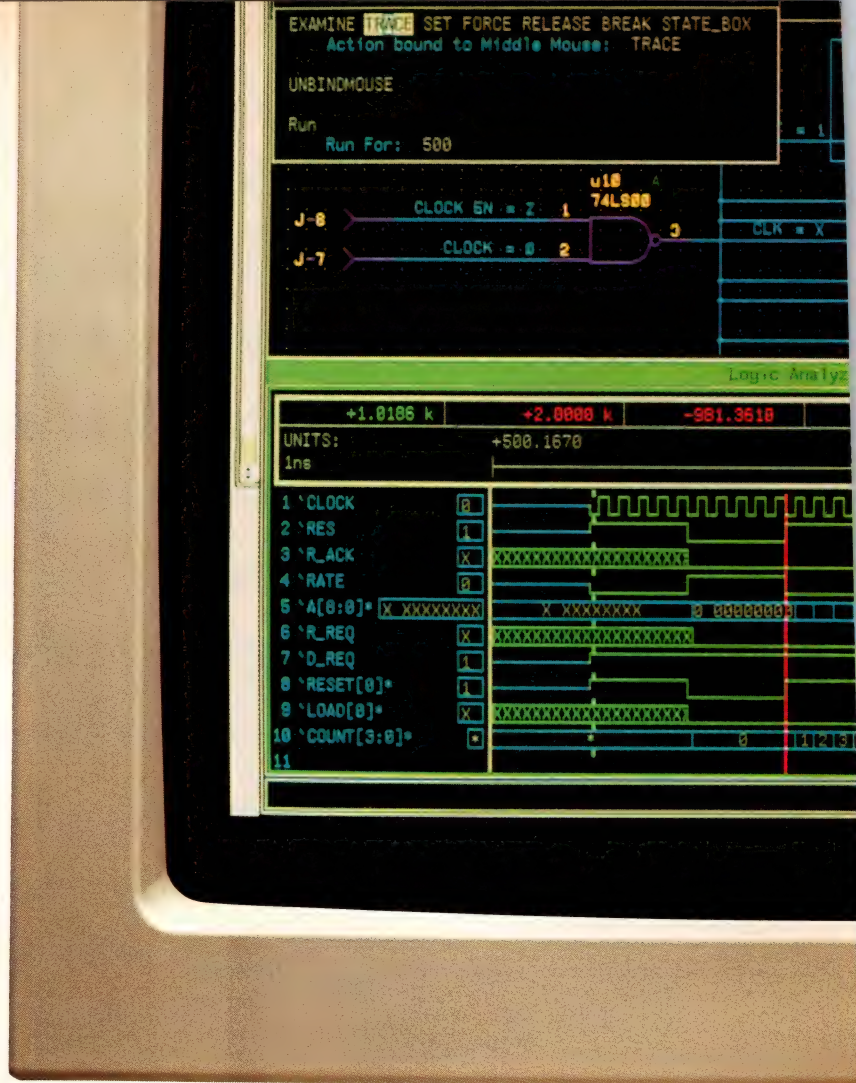

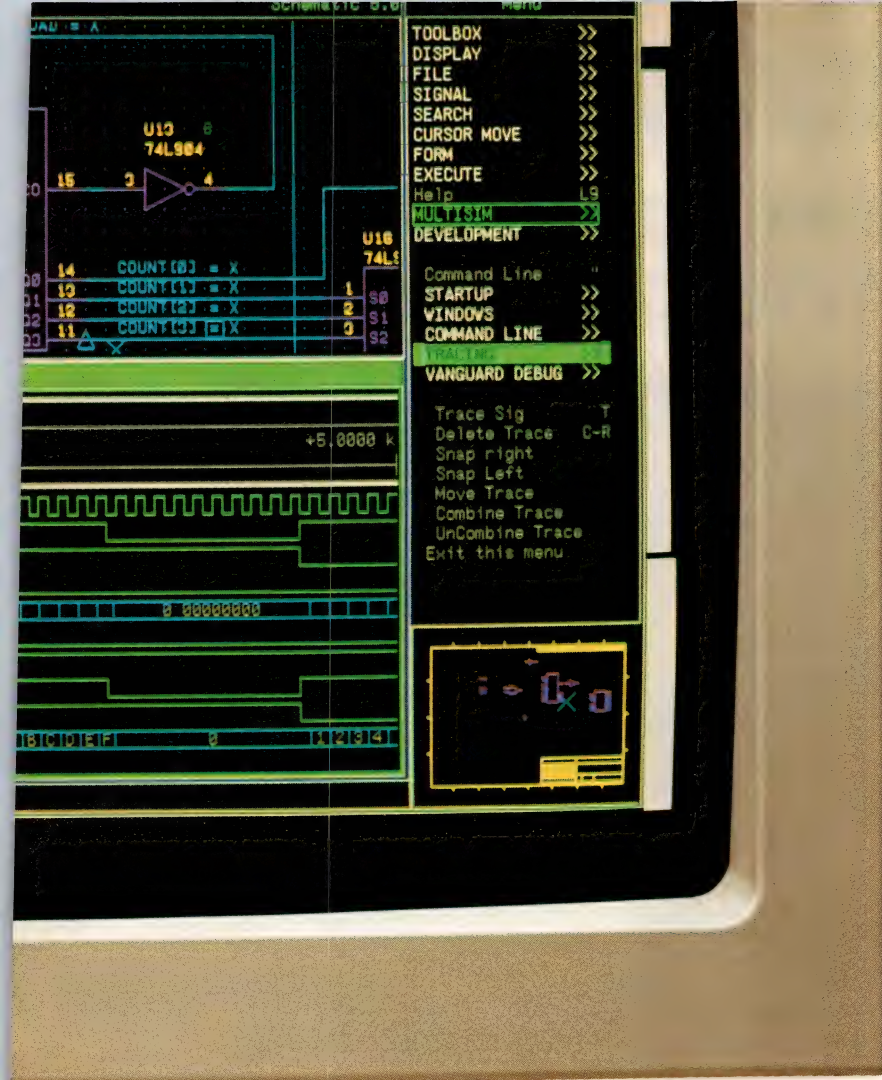

*Interactive
commands execute
instantly so it's easy
to try out new ideas.*


hurry for results,
you'll appreciate
how easily Teradyne

tools integrate into your current design process. EDIF, VHDL and commercial-tool interfaces let you build on existing databases. Then tie all your design and analysis tools running on PCs, Suns® or VAXs™ into one multiwindow design environment using Vanguard's graphical framework.

So don't wait. For more information about how our CAE tools can work for you,

call Daryl Layzer at (617) 482-2700, ext. 2808. Or write Teradyne, 5155 Old Ironsides Drive, Santa Clara, CA 95054.

LASAR lets you combine structural, behavioral, and hardware models for simulation efficiency with exceptional accuracy.

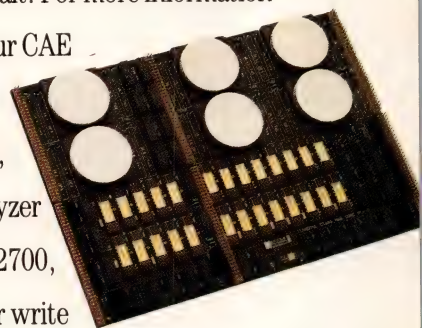

TERADYNE

who can't wait designs work.

you see in design is what you'll get in manufacturing. How so? Because our LASAR system is more accurate than other event-based simulators. LASAR's worst-case algorithms precisely simulate the operation of gate arrays, high-speed



micros and time-multiplexed buses, including the effects of process variations. You can zero-in on troublespots efficiently, and be confident that The same user interface and file format on PCs, Suns and VAXs simplifies training and communications when you're mixing platforms.

LASAR-verified designs will work—reliably and repeatably.


If you're in a

S A M S U N G
NOW

**A MILLION TRANSISTORS ON A
UNTIL YOU CONTEMPLATE A**



MICROPROCESSOR IS IMPRESSIVE, RAM WITH SIX TIMES AS MANY.



The recently introduced Samsung 1-meg SRAMs have a transistor count of 6.6 million.

In a day and age when makers of advanced microprocessors take understandable pride in the 1 million transistors on their chips, we think it's forgivable for us to be proud of the vastly greater number on these SRAMs.

They're among the most difficult of all semiconductors to produce, and only a few manufacturers can make them.

We offer the 1-meg slow SRAM in several speeds, several power ratings, and several package types. We're currently developing the part in the revolutionary TSOP packaging.

All those things—plus forthcoming high-density fast and ultra-fast SRAMs, plus additional slow parts for main store and buffer applications—give you an

idea of Samsung's commitment to this demanding technology.

Besides the 1-meg slow SRAM, in the main-store and buffer areas we'll sample next year a 1-meg fast static RAM family, and go into production with a 1-meg pseudo-SRAM.

THE SAMSUNG 1-MEG SRAM

Speeds: 70°, 85, 100, 120 ns.

Package types: TSOP°, DIP, SOIC.

Power ratings: Low-low°, low, standard.

Organization: 128K x 8.

For information on the 1-meg SRAM or our 1-meg pseudo-static, write today to SRAM Marketing, Samsung Semiconductor, 3725 No. First St., San Jose, CA 95134. Or call 1-800-669-5400, or 408-954-7229.

After all, the best way to contemplate the 6.6 million transistors on the part, is to get your hands on one.



SAMSUNG
Semiconductor

* Available 1991. © Samsung Semiconductor, Inc., 1990.

CIRCLE NO. 41



MAKING THE SWITCH TO HIGH PERFORMANCE? OUR 68331 PUTS YOU ON THE RIGHT TRACK.

Considering a move up in power? Now you can switch to the 32-bit performance track that's parallel with all your future needs. Thanks to Motorola's new, surprisingly affordable 68331 microcontroller.



OUR NEW 68331 IS MORE THAN A MICROCONTROLLER. IT'S A MILESTONE.

The 68331 features the same powerful 32-bit CPU, System Integration Module, and Queued Serial Module used in our unsurpassed 68332.

Not to mention a powerful General Purpose Timer. Modular design. The support of Motorola's huge 68000 Family software base. And access to the most sophisticated development systems in the industry.

All at a price that's considerably less than you'd expect to pay for 32-bit power.

IF YOU'RE HEADED FOR HIGH PERFORMANCE, YOU'RE ON THE RIGHT PATH.

With Motorola, your path to power is virtually a straight shot, thanks to the families of

microcontrollers we've mapped out to take you from here to high performance. Without unnecessary changes in software and architectures along the way.

The newest point on this revolutionary route is Motorola's 68331.

There will be many others in the months to come, all of which demonstrate one thing.

For well-planned migration to high performance, travel with the leader. Motorola.

To receive a Technical Product Preview for the 68331, plus more news to come on our high performance migration path, please complete and return this coupon to:
Motorola, Ltd.


European Literature Center
88 Tanners Drive
Blakelands, Milton Keynes MK14-5BP
United Kingdom

Name _____
Title _____
Company _____
Address _____
City _____
Country _____

THE PATHWAY TO PERFORMANCE.


**MOTOROLA**© 1990 Motorola, Inc.

Our new LED agreement goes beyond the surface.

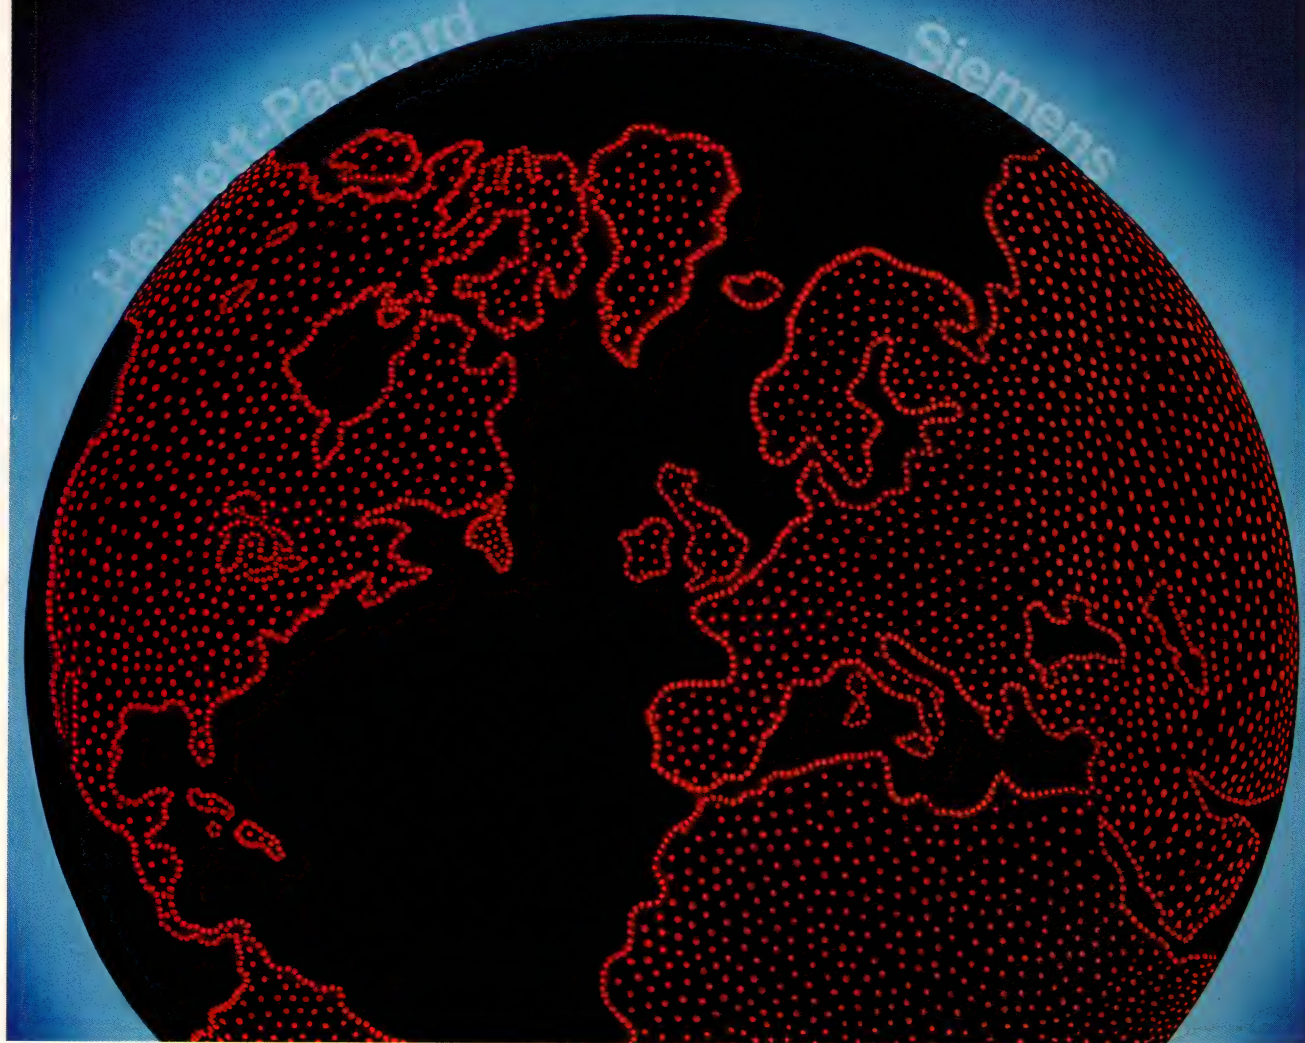

When it comes to surface-mount (SMT) LED indicators, Hewlett-Packard and Siemens are making a world of difference. Through our extensive co-development efforts, we can offer you standard, multi-sourced SMT LEDs.

By combining our expertise in the optoelectronics field, we've done more than respond to your need for a global standard.



Our SMT LEDs are designed to give you performance comparable to through-hole LEDs.

To brighten your design outlook even further, our LED indicators will provide SMT manufacturing process compatibility for ease of placement and soldering. Plus, we'll offer a full range of LED colors, and light intensity that outshines all others.

Best of all, these lamps are from HP and Siemens. So you're assured of our commitment to

excellence in service, support and reliability.

For further information please contact Hewlett-Packard GmbH Components Marketing Europe: Fax (49) 7031-14-2216.

For people like you who demand high performance SMT LEDs, two sources, and one standard, a new day is dawning.

There is a better way.



**HEWLETT
PACKARD**

NEWS BREAKS

EDITED BY SUSAN BUREAU

TRUE-COLOR DAC BOOSTS WINDOWING PERFORMANCE

Providing separate color maps to mix multiple graphics modes on a single display, the 170-MHz Bt463 TrueVu RAMDAC from Brooktree Corp (San Diego, CA, (619) 452-7580) lets you vary the pixel depth of each display window on a screen. The \$317 (100) monolithic IC has a reconfigurable pixel port with all the logic necessary to manage arbitrary plane depths on a pixel-by-pixel basis. The device uses its multiplexed inputs to offer double and triple buffering for animation applications. You can vary the size of each color map from 16 to 512 addresses. To identify the individual characteristics of each window, a 4-bit word accompanying each set of pixel and overlay data specifies 24-plane true color, 8-bit pseudocolor, or 8-bit gray scale. Using this word to determine the conversion type, the IC converts every pixel from a virtual color-map index to a physical color-map index before sending the pixel to the chip's variable-sized look-up table.

The first 3-D graphics processing board to incorporate the Bt463 is the \$8000 EG3-1280 from Matrox Electronic Systems (Dorval, Quebec, Canada, (514) 685-2630). This board plugs into EISA-bus computers and creates 1.3M transformed 3-D vectors/sec and 20,000 shaded polygons/sec in true color.—J D Mosley

INSTRUMENT PERFORMS 100-MHz STATE AND TIMING ANALYSIS

Tektronix (Portland, OR, (800) 245-2036) deplores using clock speed, channel count, and memory depth to sum up a logic analyzer's capabilities. The company claims that users who focus on just those specs inevitably wind up short-changing themselves. But width, depth, and speed are what the market is familiar with, and the Centurion 92A96, a card for Tektronix's DAS9200 logic-analysis system, can compete on those terms. The \$17,950 board supports 100 channels (including four clock channels) and performs timing or state analysis at 100 MHz. Versions are available with 8k and 32k frames of memory. Fully synchronized operation of four cards yields the same specs on 288 channels—more than enough for the fastest RISC chip currently envisioned. Systems with 1536 channels are workable. Multiplexed operation supports 400-MHz timing analysis on 24 channels/card. You can switch between state and timing analysis without repositioning probes. The system will simultaneously display timing diagrams and disassembled code.—Dan Strassberg

CREATE UNIQUE GUIs FOR PC-BASED VIRTUAL INSTRUMENTS

Using the Virtual Instrument Developer Toolkit from National Instruments (Austin, TX, (512) 794-0100), you can customize a graphical user interface (GUI) for PC-based instruments that have no front panel of their own, such as VXIbus devices and remotely controlled IEEE-488-bus or RS-232C instruments. It lets a computer screen imitate the look-and-feel of physical instrument panels; it also lets you control the instruments from DOS. This \$995 kit is an extension of the C programming language, using objects and verbs to create and define your GUI in an object-oriented format. It includes an instrument panel library, an object-definition compiler, and a library of images and fonts. Compatible with the manufacturer's existing LabWindows libraries, the toolkit lets you use digital readouts, waveforms, and simulated LEDs to display data. In addition, you can create a GUI that customizes one or more instruments for a particular application. For example, your GUI could perform like a spectrum analyzer by combining the capabilities of a function generator, a universal counter, and a digital multimeter.—J D Mosley

NEWS BREAKS

PROCESSOR INCLUDES CPU AND IBM PC/AT SUPPORT CIRCUITRY

Mother-board chip-set vendors have hinted at integrating an Intel-compatible CPU into a chip set. Now μ P vendor AMD (Austin, TX, (512) 385-8542) has implemented a typical AT-compatible mother board on one chip. The Am286ZX/LX IC includes a 12- or 16-MHz 80286, dynamic-RAM control logic, two interrupt controllers, three counter/timers, a real-time clock with CMOS RAM, a bus controller, and EMS 4.0 (expanded memory specification) support circuitry. You need add only BIOS ROMs, dynamic RAM, a keyboard controller, and (optionally) a math coprocessor to have a complete mother board. The 12- and 16-MHz Am286ZX chips cost \$69 and \$85.50 (1000), respectively. The Am286LX ICs, which add power-saving features for laptop computer applications, cost \$76.50 (12 MHz) and \$89 (1000) (16 MHz).—Maury Wright

32-BIT μ P TARGETS EMBEDDED SYSTEMS


The E1, a 25-MHz μ P from Hyperstone (Konstanz, Germany, (7531) 67789), has separate 32-bit data and address buses and 18 global and 64 local registers. You can reconfigure the registers to a stack of variable frame length from 2 to 16. The majority of instructions are single cycle and operate on 16-bit data. Multiply and divide instructions require multiple cycles. Used with dynamic RAMs having a 40-nsec page-mode cycle time, the μ P can achieve a 25-MIPS burst rate without external memory caches. Benchmarks yield 38,000 Dhrystones. The throughput results from a combination of pipelined load instructions, an internal 2-stage decode/execute pipeline, and a look-ahead instruction cache. Software tools include a cross-assembler and a debugger that run under MS-DOS; an emulator links to your PC through an RS-232C port. The E1 costs \$150 (1000).—Brian Kerridge

VME, IBM PC BOARDS EMULATE NTDS HOST AND PERIPHERALS

Two NTDS (Navy Tactical Data Systems) interface boards allow you to emulate expensive host computers and peripherals with personal computers and workstations. The Hawke (VMEbus) and Eagle II (IBM PC/AT bus) from Sabtech Industries (Anaheim, CA, (714) 970-5311) suit applications in hardware and software development, test, debug, and maintenance of NTDS products. Separate versions comply with Types A, B, and C NTDS communications standards specified in MIL-STD-1397B. The boards come with software for interactive emulation and for interfacing with high-level languages such as C. The IBM PC-compatible boards cost \$4000 to \$4500; the VMEbus offerings sell for \$5000.—Maury Wright

SIMULATOR GOES TO THE SOURCE OF THE PROBLEM

The 90.1 release of the Silos II simulator from Simucad (Union City, CA, (415) 487-9700) provides two enhancements to help you find sources of design errors. The first is what the company calls a 2-D, interactive-debug feature. When you discover a node transition to an incorrect state, you can interactively trace the transition backward in time to see which device input caused the transition. You can continue to trace backward, both in time and in signal path, until you find the initial cause of the problem. The second Silos II enhancement lets you observe short-duration spikes and the events they cause. Short-duration spikes can occur when two or more edge transitions happen at nearly the same time. When these spikes are shorter than the propagation delay of a device being simulated, some simulators fail to show their effect on the device's output. The new release is free to Silos II users with a current maintenance agreement. Silos II ranges from \$5000 for personal-computer versions to \$80,000 for mainframe versions.—Doug Conner

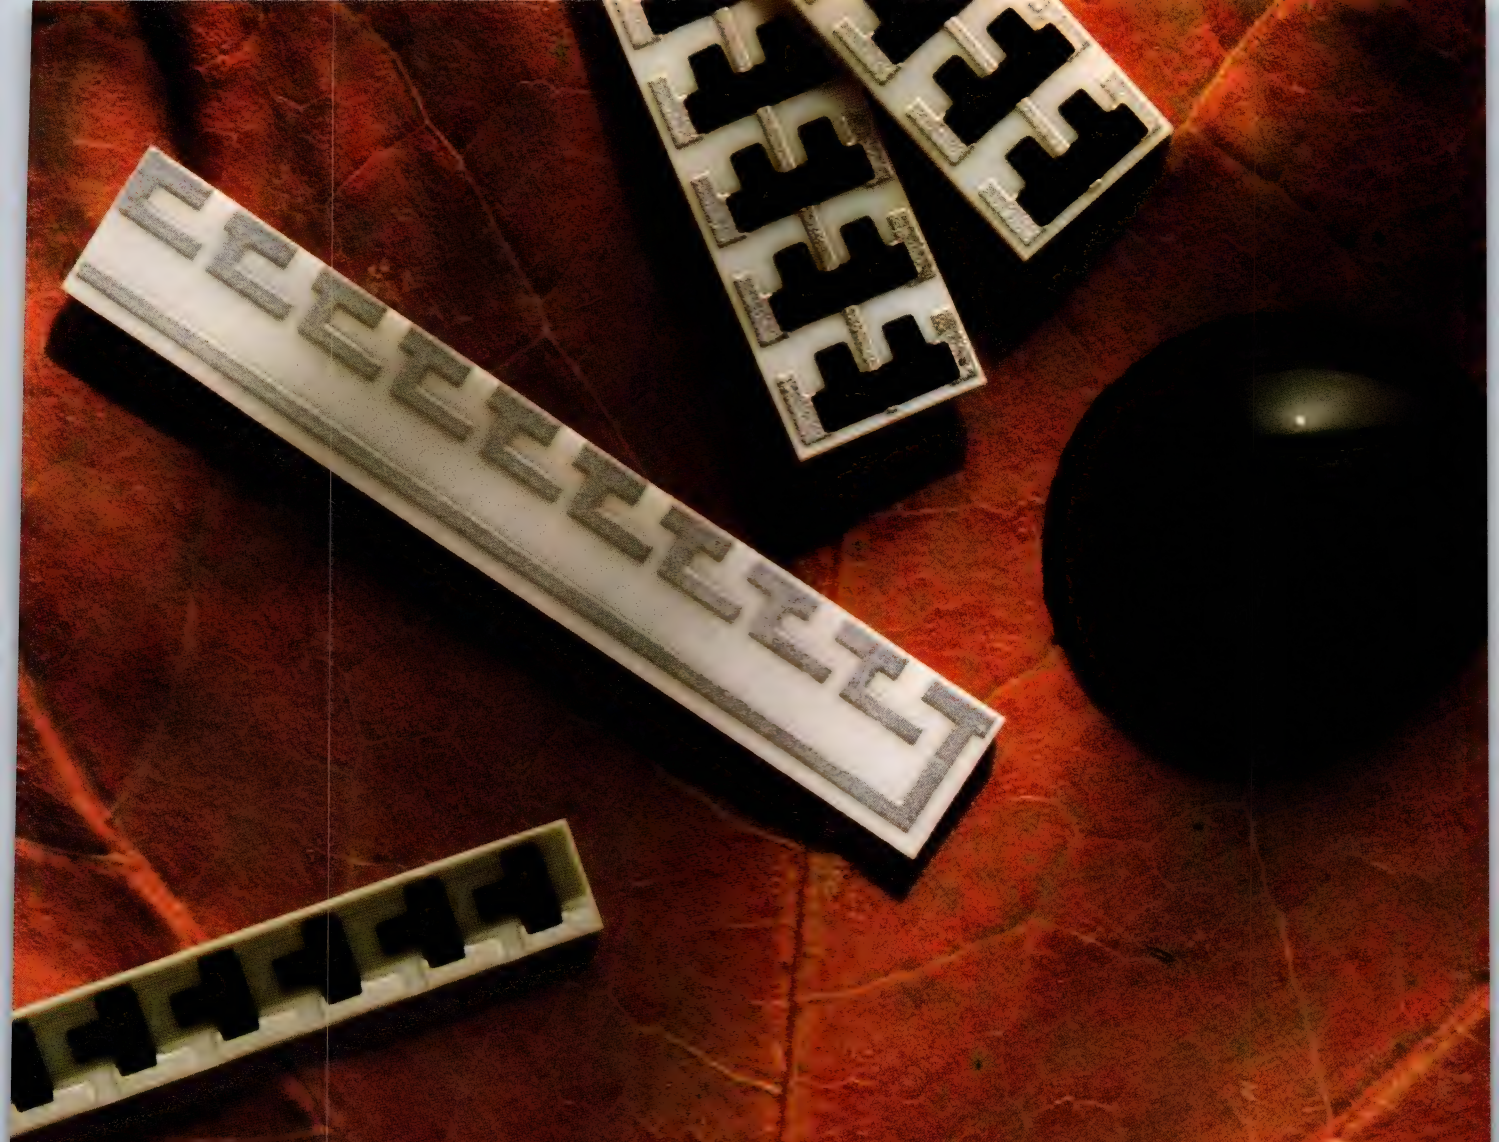


Ceramic and thick film alone can't make a great network partnership.

Dale® can give you more utility — and value — from thick film resistor networks. We offer the industry's widest choice of through-hole mounted styles — including commercial and MIL-R-83401. And, we're well-qualified to guide you into efficient use of surface mounting with gull wing and "J"-lead small outline styles proven in high-volume applications.

This wide choice lets us help your project teams much earlier in the planning process... providing faster access to nonstandard resistor and resistor/capacitor

Dale® Can.

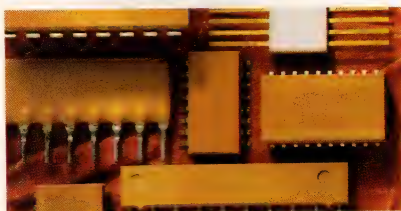

schematics when required.

What's more, our extensive experience with Just-In-Time and Statistical Process Control programs can provide a much higher comfort level with quality and delivery. Call today. Let's discuss a

partnership that offers maximum leverage for efficient network use. Contact your Dale Representative or phone (915) 592-3253. Dale Electronics, Inc., Box 26728, El Paso, Texas 79926-6728.



FILTERS




dc to 3GHz from \$11.45

lowpass, highpass, bandpass, narrowband IF

- less than 1dB insertion loss • greater than 40dB stopband rejection
- 5-section, 30dB/octave rolloff • VSWR less than 1.7 (typ) • meets MIL-STD-202 tests
- rugged hermetically-sealed pin models • BNC, Type N; SMA available
- surface-mount • over 100 off-the-shelf models • immediate delivery


low pass dc to 1200MHz

MODEL NO.	PASSBAND, MHz (loss <1dB)		fco, MHz (loss 3db)		STOP BAND, MHz (loss >20dB) (loss >40dB)		VSWR		PRICE \$ Qty. (1-9)
	Min.	Nom.	Max.	Max.	Min.	Max.	pass-band typ.	stop-band typ.	
PLP-10.7	DC-11	14	19	24	200		1.7	18	11.45
PLP-21.4	DC-22	24.5	32	41	200		1.7	18	11.45
PLP-30	DC-32	35	47	61	200		1.7	18	11.45
PLP-50	DC-48	55	70	90	200		1.7	18	11.45
PLP-70	DC-60	67	90	117	300		1.7	18	11.45
PLP-100	DC-98	108	146	189	400		1.7	18	11.45
PLP-150	DC-140	155	210	300	600		1.7	18	11.45
PLP-200	DC-190	210	290	390	800		1.7	18	11.45
PLP-250	DC-225	250	320	400	1200		1.7	18	11.45
PLP-300	DC-270	297	410	550	1200		1.7	18	11.45
PLP-450	DC-400	440	580	750	1800		1.7	18	11.45
PLP-550	DC-520	570	750	920	2000		1.7	18	11.45
PLP-600	DC-580	640	840	1120	2000		1.7	18	11.45
PLP-750	DC-700	770	1000	1300	2000		1.7	18	11.45
PLP-800	DC-720	800	1080	1400	2000		1.7	18	11.45
PLP-850	DC-780	850	1100	1400	2000		1.7	18	11.45
PLP-1000	DC-900	990	1340	1750	2000		1.7	18	11.45
PLP-1200	DC-1000	1200	1620	2100	2500		1.7	18	11.45




high pass dc to 2500MHz

MODEL NO.	PASSBAND, MHz (loss <1dB)		fco, MHz (loss 3db)		STOP BAND, MHz (loss >20dB) (loss >40dB)		VSWR		PRICE \$ Qty. (1-9)
	Min.	Min.	Nom.	Max.	Min.	Max.	pass-band typ.	stop-band typ.	
PHP-50	41	200	37	26	20		1.5	17	14.95
PHP-100	90	400	82	55	40		1.5	17	14.95
PHP-150	133	600	120	95	70		1.8	17	14.95
PHP-175	160	800	140	105	70		1.5	17	14.95
PHP-200	185	800	164	116	90		1.6	17	14.95
PHP-250	225	1200	205	150	100		1.3	17	14.95
PHP-300	290	1200	245	190	145		1.7	17	14.95
PHP-400	395	1600	360	290	210		1.7	17	14.95
PHP-500	500	1600	454	365	280		1.9	17	14.95
PHP-600	600	1600	545	440	350		2.0	17	14.95
PHP-700	700	1800	640	520	400		1.6	17	14.95
PHP-800	780	2000	710	570	445		2.1	17	14.95
PHP-900	910	2100	820	660	520		1.8	17	14.95
PHP-1000	1000	2200	900	720	550		1.9	17	14.95




bandpass 20 to 70MHz

MODEL NO.	CENTER FREQ. MHz F0	PASS BAND, MHz (loss <1dB)		STOP BAND, MHz (loss > 10 dB) (loss > 20 dB)				VSWR 1.3:1 typ. total band MHz	PRICE \$ Qty. (1-9)
		Max. F1	Min. F2	Min. F3	Max. F4	Min. F5	Max. F6		
PIF-21.4	21.4	18	25	4.9	85	1.3	150	DC-220	14.95
PIF-30	30	25	35	7	120	1.9	210	DC-330	14.95
PIF-40	42	35	49	10	168	2.6	300	DC-400	14.95
PIF-50	50	41	58	11.5	200	3.1	350	DC-440	14.95
PIF-60	60	50	70	14	240	3.8	400	DC-500	14.95
PIF-70	70	58	82	16	280	4.4	490	DC-550	14.95



narrowband IF

MODEL NO.	CENTER FREQ. MHz F0	PASS BAND, MHz I.L. 1.5dB max.		STOP BAND, MHz I.L. > 20dB		STOP BAND, MHz I.L. > 35dB		PASS-BAND VSWR Max.	PRICE \$ Qty. (1-9)
		F1-F2	F5	F6	F7	F8-F9			
PBP-10.7	10.7	9.5-11.5	7.5	15	0.6	50-1000		1.7	18.95
PBP-21.4	21.4	19.2-23.6	15.5	29	3.0	80-1000		1.7	18.95
PBP-30	30.0	27.0-33.0	22	40	3.2	99-1000		1.7	18.95
PBP-60	60.0	55.0-67.0	44	79	4.6	190-1000		1.7	18.95
PBP-70	70.0	63.0-77.0	51	94	6	193-1000		1.7	18.95




CIRCLE NO. 44

Mini-Circuits

P.O. BOX 350166, Brooklyn, New York 11235-0003 (718) 934-4500 FAX (718) 332-4661 TELEX 6852844 or 620156 WE ACCEPT AMERICAN EXPRESS

F132-2 REV. ORIG.

WHAT GOOD IS A BRAIN

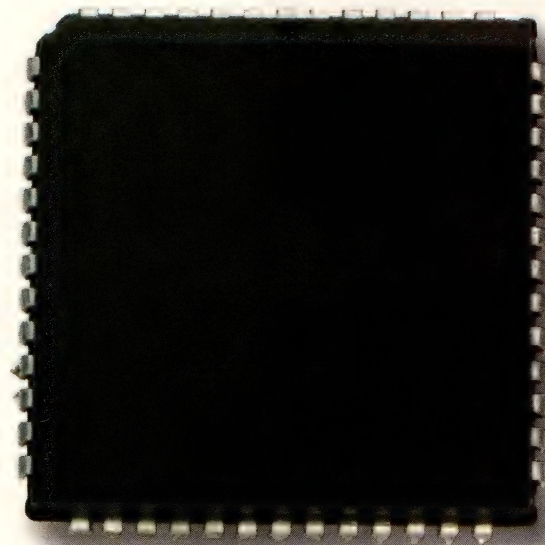

WITHOUT A MEMORY?



To hear most people in the computer business talk, you'd think the only valuable part of a system is its microprocessor.

Maybe they haven't lost their minds. But they've certainly forgotten about the hard drive. And the critical data it stores. Data which can't be easily replaced like a microprocessor.

So it's no surprise that many OEMs are reducing their risk of system failure with disk drives from Conner. Using proven technologies, our high performance drives consistently set the standards for form factor, reliability, and innovation.

That's because at Conner, we work closely with our customers to identify their needs sooner, and fill them faster. Providing them the quickest time to market; with exactly the right product. Plus, we're expanding our worldwide manufacturing facilities to meet growing customer demand around the globe.

All of which makes choosing Conner disk drives a low risk decision.

So call Conner today. The results should be quite memorable.

CONNER
T H E T H I R D W A V E

• San Jose: (408) 456-4500 Europe—lvrea: (39) 125-631715 • London: (44) 249-444-049 • Munich: (49) 89-129-8061 • Paris: (33) 1-47-474108 Asia—Singapore: (65) 2845366 • Taipei: (886) 2-718-9193 • Tokyo: (81) 3-485-8901

Asia Series

Anyone contemplating doing business in Asia should first receive a little wisdom.

In business, knowledge is power. And anyone who does business in the Pacific Rim without knowing the culture is working at a disadvantage. Which is why Northwest is proud to underwrite the four-part public television series "Yue-Sai Kan's Doing Business in Asia." It's an insider's guide to success in Japan, Taiwan, Hong Kong, and South Korea. You'll profit from the Asian experience of companies like Coca-Cola, Citibank, Estee Lauder, IBM and Ford. And of course, you'll benefit from the insight Northwest can offer after more than 40 years of helping people do business in Asia. Check local listings for date and time of broadcast. In just a short while, you'll be infinitely wiser.



© 1990 Northwest Airlines, Inc.

NORTHWEST AIRLINES



SIGNALS & NOISE

Reader has minor quibble

The article by J D Mosley, "Mini disk drives strive for acceptance" (EDN, May 24, 1990, pg 95), is a very good overview of the new miniature disk drives. I have a very minor quibble, however, about the way the article compares power consumption between the 2-in. floppy-disk drive used in the Zenith MinisPort and the standard 3½-in. drive. On pg 97, J D states that "A comparable 3½-in. drive consumes 150% more power than the 2-in. drive . . ." That makes sense, and the numbers that follow confirm my understanding of just what "150% more" means.

The photo caption on pg 98, however, tries to reverse the formula, which doesn't work. What does "... consumes 150% less power than a comparable 3½-in. drive" mean? Negative power consumption?

Brooks Lyman, Designer
JRTD Inc
Concord, MA

(Ed Note: Sorry, I goofed.)

Violating laws of immigration and morality

In his letter (EDN, May 24, 1990, pg 39), William Geary seems to have missed the point of my response in support of Jon Titus's editorial, "Send alien graduates home" (EDN, October 27, 1988, pg 57).

If Bill wishes to label patriotism, moral fealty, and a responsibility to return at least what one takes as "thuggery," then so be it; this is (still) a free country. He attempts to make a political battleground where none exists. The issue in question is a moral one.

If a third-world country exports all of its talent, it will forever remain a third-world country, dependent on the rest of the world for its very existence. Compare this concept with Bill's references to freedom and human dignity. When a citizen of that country signs an agreement to acquire a skill else-

where and return (presumably to the benefit of said country) but instead decides to "take the money and run," that individual is violating not only the immigration and emigration laws of both lands, but is also prostituting his/her moral obligation.

It is indeed a privilege to live in the US, a privilege many people gave their lives to secure and maintain. We have an overabundance of technologists. Third-world countries, on the other hand, need all the help they can get.

We are also a country of laws. These laws very liberally govern the flow of immigration into the US. These are the same laws that the "selfish opportunists," as Bill refers to Tesla, Einstein, et al, obeyed when they entered the US. They didn't come here under the guise of a temporary student visa. Nor were their native countries technologically depressed; quite the contrary. These people fled oppression. I did not attempt to make this point in my letter.


N Silber
ITT Aerospace Communications
Nutley, NJ

IT'S EASY TO HAVE YOUR SAY

EDN's Signals & Noise column provides a forum for readers to express their opinions on issues raised in the magazine's articles or on any topic that affects the engineering industry. You can use one of several easy ways to reach us. First, there's always the mail. Send your letters to Signals & Noise Editor, EDN Magazine, 275 Washington St, Newton, MA 02158. Or, send us a message via MCI mail at EDNBOS. Finally, EDN's bulletin-board system is ready for use—and it's free (except for the phone call). You can reach us at (617) 558-4241 and leave a letter in the EDITORS Special Interest Group. You'll need a 1200-bps modem and a communications program that is set for eight data bits, no parity, and one stop bit, or 1200, 8N1 in shorthand.

LCD Proto Kit

Everything you need to start your LCD application
... create complex screens
in just a few hours!

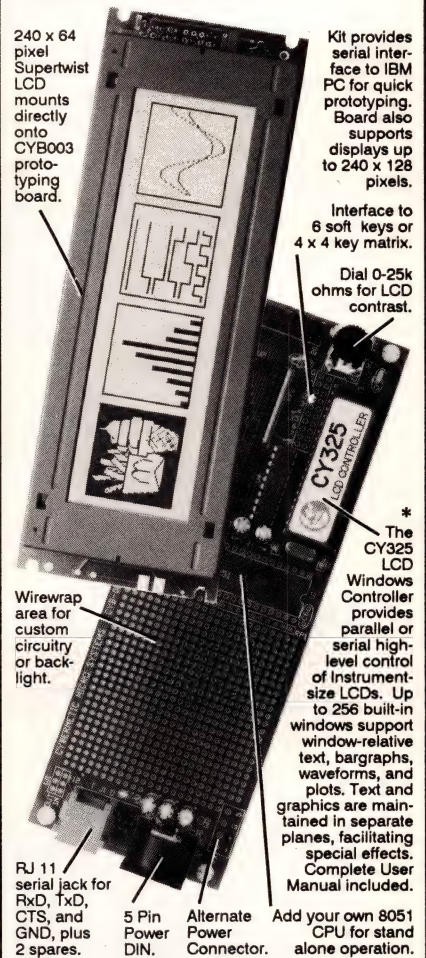

Kit also includes:



\$495 - Kit
Popular LCD Starter Kit.



(\$595 pre-assembled & tested)

*The CY325 40-pin CMOS LCD Controller IC is available from stock @ \$75/singles, \$20/1000s (Surface mount also avail in qty.)

CyberneticMicroSystems


Box 3000 • San Gregorio CA 94074
Tel: 415-726-3000 • Fax: 415-726-3003

CIRCLE NO. 1

MEGA MEMORY.

SONY HIGH-DENSITY SRAMS				
MODEL	CONFIG.	SPEED (ns)	PACKAGING	DATA RETENTION
CXK581000P*	128K x 8	100/120	DIP 600 mil	L, LL
CXK581000M*	128K x 8	100/120	SOP 525 mil	L, LL
CXK58100TM*	128K x 8	100/120	TSOP	L, LL
CXK58100YM*	128K x 8	100/120	TSOP (reverse)	L, LL
CXK581001P	128K x 8	70/85	DIP 600 mil	L
CXK581001M	128K x 8	70/85	SOP 525 mil	L
CXK581020SP	128K x 8	35/45/55	SDIP 400 mil	
CXK581020J	128K x 8	35/45/55	SOJ 400 mil	
*Extended temperature range available.			L = Low power. LL = Low, low power.	

MEGA COMMITMENT.

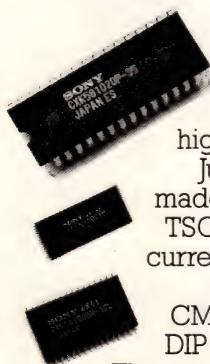

As you can see, Sony's more committed than ever to meeting your high-density SRAM needs.

Just consider the enhancements we've made in a few short months: TSOP and TSOP-reverse packaging. Low data retention current. And extended temperature range.

All based on our unique 0.8-micron CMOS technology, and available in 32-pin DIP and surface-mount plastic packages.

Then consider our ever-increasing production capabilities. We've just added yet another SRAM facility in Japan. And acquired a large AMD facility in San Antonio, Texas.

So you can really count on us in a crunch.

Need more proof we're serious about your each and every SRAM need?

Call us. We've got more breakthroughs on the way. Well over 100 SRAM products spanning the performance spectrum. And the desire to meet—or exceed—your toughest performance spec.

Sony high-density SRAMS are shipping now, complete with competitive pricing. So call (714) 229-4190 today. Or write Sony Corporation Of America, Component Products Company, 10833 Valley View St., Cypress, CA 90630, Attention: Semiconductor sales. FAX (714) 229-4285.

SONY®

ASK EDN

EDITED BY JULIE ANNE SCHOFIELD

Have you been stumped by a design problem so long that you don't know who to turn to? Are you having trouble locating parts? Finding companies? Can't interpret a spec sheet? Ask EDN.

This department will serve as a forum to solve nagging problems and answer difficult questions. EDN's editors will provide the solutions. If we can't solve a problem, we'll find an expert who can, or we'll print your letter and ask your peers for help. We can't answer every question, but we'll try to publish the ones that will help you most in your job.

Address your letters to Ask EDN, 275 Washington St, Newton, MA 02158. FAX (617) 558-4470; MCI: EDNBOS. Or, send us a letter on EDN's bulletin-board system. You can reach us at (617) 558-4241 and leave a letter in the /ask_edn Special Interest Group. You'll need a 1200-bps modem and a communications program that is set for eight data bits, no parity, and one stop bit, or 1200, 8N1 in shorthand. Turn to the Feedback and Amplification section of this issue's Design Ideas to learn how to use the bulletin-board system.

Reader seeks macro assembler

Where can I find a macro assembler for the 6805 μ P family that runs on an Apple Macintosh? Thanks.

*Antoine Elinik
Apelem
Nimes, France*

Associate Editor Mike Markowitz took this question on and found a company that sells such a part for \$149.95:

Microdialects
Box 30014
Cincinnati, OH 45230
(513) 271-9100.

Help the Navy

I recall that sometime in the last year, a company announced an IRIG-B (Inter-Range Instrumentation Group format B) time-code receiver completely contained on a single chip. (An IRIG-B converter receives a 1V p-p analog or RF signal and converts it to time of day in digital format based on Greenwich mean time.) I now have an application that requires such an IC and can't locate a source. Please help in any way you can.

*David Fors
Electronics Engineer
Naval Weapons Center
China Lake, CA*

Associate Editor John Gallant posed this question to three engineers who work for companies that

produce time-code readers. They said that they had heard rumors that such a device existed but didn't know what company made it. If you do, please let us know.

Elusive software found

In the August 2, 1990, issue of EDN, a reader—Jon Sanserino—asked if anyone could help him locate a piece of software called Partlister. I have a copy of that software that I would be willing to let go for \$25, including shipping costs and all documentation. I obtained that software to do part listings, but before I could even finish reading the documentation, my company went on another system. My software has sat on a shelf since that time.

*James V Joyce
Bendix Avionics Div
Fort Lauderdale, FL*

A need for RF transceiver

I need sources for RF transmitter/receiver building blocks and/or modules. The devices will be used for digital data transfer over 100 ft under the control of Motorola's 146805E2 microcontroller.

*Joe Thomas
Weber Costello
Troy, MO*

If any reader knows of such source, please drop Ask EDN a line.

EDN

We've drastically reduced the time it takes to produce a baby.



If you've been laboring under the assumption that Video RAMs have gotten about as fast as possible, Toshiba would like to introduce you to their new 1 Megabit creations.

With faster read/write features, they have a bright future in all kinds of applications.

Ultrasound monitors, for instance.

Or personal computers. Magnetic Resonance Imaging equipment. Video games. If it can benefit from getting an image out of the gate and onto the screen faster,

it can use a healthy dose of Toshiba 1 Megabit high density VRAM.

For the best delivery of these babies, just call Toshiba's only national distributor, Marshall Industries. As Toshiba's number one distributor nationwide, we always have plenty of product on hand, so you can start designing whole new families right away.

In fact, the whole concept is, well, pregnant with possibilities.

Marshall

(*Authorized Locations)
AL Huntsville (205) 881-9235*
AZ Phoenix (602) 496-0290*
 Tucson (602) 790-5687*
CA Irvine (714) 458-5301*
 Los Angeles (818) 407-4100*
 Sacramento (916) 635-9700*

San Diego (619) 578-9600*
 San Francisco (408) 942-4600*
CO Denver (303) 451-8383*
CT Connecticut (203) 265-3822*
FL Ft. Lauderdale (305) 977-4880*
 Orlando (407) 767-8585*
 Tampa (813) 573-1399*

GA Atlanta (404) 923-5750*
IL Chicago (708) 490-0155*
IN Indianapolis (317) 297-0483*
KS Kansas City (913) 492-3121*
MA Boston (508) 658-0910*
MD Maryland (301) 622-1118*
MI Michigan (313) 525-5850*

MN Minneapolis (612) 559-2211*
MO St. Louis (314) 291-4650*
NC Raleigh (919) 878-9882*
NJ N. New Jersey (201) 882-0320*
NY Binghamton (607) 798-1611*
 Long Island (516) 273-2424*
 Rochester (716) 235-7620*

OH Cleveland (216) 248-1788*
 Dayton (513) 898-4480*
OR Portland (503) 644-5050*
PA Philadelphia (609) 234-9100*
 Pittsburgh (412) 788-0441*
TX Austin (512) 837-1991*
 Dallas (214) 233-5200*

El Paso (915) 593-0706*
 Houston (713) 895-9200*
 San Antonio (512) 734-5100*
UT Salt Lake City (801) 485-1551*
WA Seattle (206) 486-5747*
WI Milwaukee (414) 797-8400*

In Canada: G.S. Marshall Co.
 Montreal (514) 694-8142*
 Ottawa (613) 584-0168*
 Toronto (416) 458-8046*
 Vancouver (604) 436-0068*
 Western Canada (800) 465-8640*

EDITORIAL

A BBS for readers only



EDN now offers a computer bulletin-board system (BBS) that lets you communicate with your fellow engineers and with EDN's technical editors. Access to EDN's BBS is free, except that you pay for the telephone call. You can reach the BBS at (617) 558-4241. You'll need a 1200-bps modem and a communication program that is set for 8 data bits, no parity, and 1 stop bit, or 1200, 8N1 in shorthand. The BBS offers many services, but we think you'll be most interested in the Special Interest Groups, or SIGs, that we have set up. In fact, the purpose of the SIGs is to enhance 2-way communication.

You'll find a SIG dedicated to our popular Design Ideas section. The DL_SIG provides a way to download complete software listings, executable code, pc-board layout files, and simulation data when contributors supply them. You'll also have the opportunity to read through other engineers' suggestions, circuit improvements, and modifications. We'll assign each Design Idea its own identification code, so you'll be able to scan through the DL_SIG bulletins and find what you want. If you make a modification that enhances a circuit or if you produce a software listing, your addition to the Design Idea bulletins helps all other DL_SIG users. Each SIG also lets you respond to bulletins and leave messages for the SIG's operator.

Some of the bulletins may have attached files of information or program code that don't fit in a short bulletin. The BBS lets you download such attachments so you can read, run, test, or examine them on your own computer. When you download files, you can select either ASCII, XMODEM, XMODEM-CRC, or YMODEM-CRC protocols. The ASCII selection lets you look at text files one screen at a time or transfer an entire ASCII file to your computer. (To do the latter, type 1C at the transfer prompt to select the continuous-transfer mode.) When you leave a DL_SIG bulletin, you can also leave an attachment file for our SIG operators to approve and add to the DL_SIG for other readers to access.

There are other SIGs worth scanning. The FREEWARE SIG contains utility, scientific, and engineering shareware programs and information. The EDITORS SIG lets you leave messages for EDN's editorial staff. If you have a technical question, you can also leave a message on the ASK_EDN SIG. In addition, when long software or other listings accompany feature articles, we'll tell you how to find them on the BBS. And, if you'd like to have a SIG set up just for microprocessors, digital signal processing (DSP), analog design, or another topic, let us know.

After you sign up, don't forget to register yourself in the BBS Registry, which is open—except for your password—to other users. The Registry can help you find a specific person, and it can help other users find you. Once you're logged into the BBS, you can see what's happening in the Information Center, the Classified Ads, and the Polls and Questionnaires. The EDN BBS also provides EMAIL for communications between users. Sorry, no quizzes or games; this is a professional bulletin board, of, by, and for engineers. The editors own it—the editors run it. As such, we won't share your name with advertisers and we'll keep the BBS free of promotional materials.

If you'd like a short instruction manual, please **Circle No. 801** on the bingo card and I'll send you a copy. We're also open to suggestions for improving and expanding the BBS. Enjoy.


Jon Titus
Editor



Jesse H. Neal
Editorial Achievement Awards
1987, 1981 (2), 1978 (2),
1977, 1976, 1975
American Society of
Business Press Editors Award
1988, 1983, 1981

RF TRANS

Over 50 off-the-shelf models...

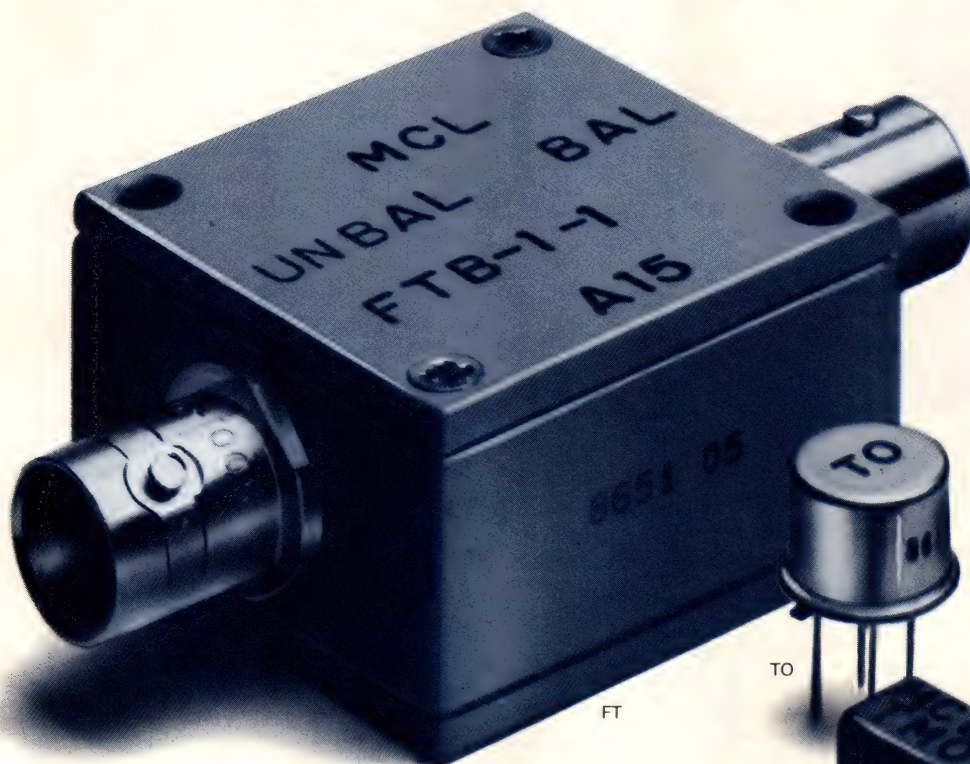


Having difficulty locating RF or pulse transformers with low droop, fast risetime or a particular impedance ratio over a specific frequency range?...Mini-Circuits offers a solution.

Choose impedance ratios from 1:1 to 36:1, connector or pin versions (plastic or metal case built to meet MIL-T-21038 and MIL-T-55831 requirements*). Ultra-wideband response achieves low droop and fast risetime for pulse applications. Ratings up to 1000M ohms insulation resistance and up to 1000V dielectric voltage. For wide dynamic range applications involving up to 100 mA DC primary current, use the T-H series. Coaxial connector models are offered with 50 and 75 ohm impedance; BNC standard; request other types. Available for immediate delivery with one-year guarantee.

Call or write for 68-page catalog or see our catalog in EEM, or Microwaves Product Data Directory.

*units are not QPL listed

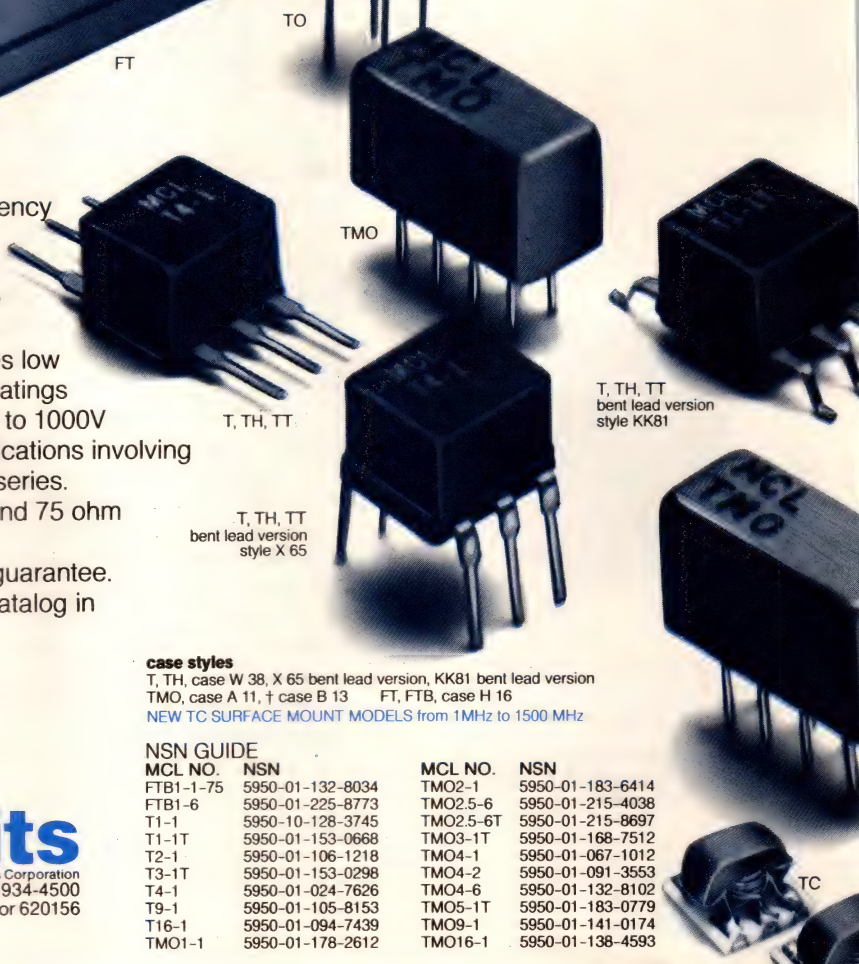

case styles

T, TH, case W 38, X 65 bent lead version, KK81 bent lead version
TMO, case A 11, † case B 13 FT, FTB, case H 16

NEW TC SURFACE MOUNT MODELS from 1MHz to 1500 MHz

NSN GUIDE

MCL NO.	NSN	MCL NO.	NSN
FTB1-1-75	5950-01-132-8034	TMO2-1	5950-01-183-6414
FTB1-6	5950-01-225-8773	TMO2.5-6	5950-01-215-4038
T1-1	5950-10-128-3745	TMO2.5-6T	5950-01-215-8697
T1-1T	5950-01-153-0668	TMO3-1T	5950-01-168-7512
T2-1	5950-01-106-1218	TMO4-1	5950-01-067-1012
T3-1T	5950-01-153-0298	TMO4-2	5950-01-091-3553
T4-1	5950-01-024-7626	TMO4-6	5950-01-132-8102
T9-1	5950-01-105-8153	TMO5-1T	5950-01-183-0779
T16-1	5950-01-094-7439	TMO9-1	5950-01-141-0174
TMO1-1	5950-01-178-2612	TMO16-1	5950-01-138-4593

finding new ways ...
setting higher standards

Mini-Circuits







A Division of Scientific Components Corporation

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500

Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156

FORMERS

3KHz-800MHz from \$3²⁵

case style number see opposite page			MODEL NO.	Ω RATIO	FREQUENCY MHz	INSERTION LOSS			PRICE \$			
						3dB MHz	2dB MHz	1dB MHz	Qty. (1-9)			
A*		T	T1-1T	1	.05-200	.05-200	.08-150	2-80	4.45			
			T1-6T	1	.003-300	.003-300	.01-150	.02-50	6.95			
			T2-1T	2	.07-200	.07-200	.1-100	.5-50	4.95			
			T2.5-6T	2.5	.01-100	.01-100	.02-50	.50-20	4.95			
			T3-1T	3	.05-250	.05-200	.1-200	.5-70	4.95			
			T4-1	4	2-350	2-350	.35-300	2-100	3.25			
			T4-6T	4	.02-250	.02-250	.05-150	.01-100	4.45			
			T5-1T	5	3-300	3-300	.6-200	.5-100	4.95			
			T8-1T	8	.03-140	.03-140	.10-90	.1-60	7.95			
			T13-1T	13	3-120	3-120	.7-80	.5-20	4.95			
			T16-6T	16	.03-75	.03-75	.06-30	.1-20	5.65			
			TH	T4-1H	4	10-350	10-350	.15-300	.25-200	5.95		
			TMO	TMO1-1T	1	.05-200	.05-200	.08-150	2-80	7.95		
				TMO2-1T	2	.07-200	.07-200	.1-100	.5-50	8.45		
				TMO2.5-6T	2.5	.01-100	.01-100	.02-50	.05-20	8.45		
				TMO3-1T	3	.05-250	.05-250	.1-200	.5-70	7.95		
				TMO4-1	4	2-350	2-350	.35-300	2-100	6.25		
				TMO5-1T	5	3-300	3-300	.6-200	.5-100	8.45		
				TMO13-1T	13	3-120	3-120	.7-80	.5-20	8.45		
B*		TT	TT1-6	1	.004-500	.004-500	.02-200	.1-50	6.95			
			TT1.5-1	1.5	.075-500	.075-500	2-100	.1-50	5.95			
			TT2.5-6	2.5	.01-50	.01-50	.025-25	.05-10	6.45			
			TT4-1	3	.05-200	2-50	2-50	.1-30	5.95			
			TT4-1A	4	.01-300	.01-300	.02-250	.03-180	6.95			
			TT25-1	25	.02-30	.02-30	.05-20	.1-10	9.95			
			TTMO	TTMO25-1	25	.02-30	.02-30	.05-20	.1-10	11.95		
			TTMO1-1	1	.005-100	.005-100	.01-75	.05-40	11.45			
			TTMO4-1A	4	.01-300	.01-300	.02-250	.03-180	13.95			
			C		T	T1-1	1	.15-400	.15-400	.35-200	2-50	3.25
						T1.18-3	1.18	.001-250	.001-250	.002-200	.003-50	5.65
T1-6	1	.01-150				.01-150	.02-100	.05-50	5.65			
T1.5-1	1.5	.1-300				.1-300	2-150	.5-80	4.45			
T1.5-6	1.5	.02-100				.02-100	.05-50	.01-25	5.65			
T2.5-6	2.5	.01-100				.01-100	.02-50	.05-20	4.45			
T4-6	4	.02-200				.02-200	.05-150	.1-100	4.45			
T9-1	9	.15-200				.15-200	3-150	2-40	3.95			
T16-1	16	3-120				3-120	.7-80	.5-20	4.45			
T36-1	36	.03-20				.03-20	.05-10	.1-5	6.95			
TO	TO-75	1				10-500	—	10-500	40-250	6.95		
TH	T1-1H	1				8-300	8-300	10-200	25-100	5.95		
	T9-1H	9				2-90	2-90	3-75	6-50	6.45		
	T16-H	16				7-85	7-85	10-65	15-40	6.45		
TMO	TMO1-02	1				1-800	1-800	2-500	—	9.45		
	TMO1-1	1				.15-400	.15-400	.35-200	2-50	6.25		
	TMO1.5-1	1.5				.1-300	.1-300	2-150	.5-8	8.45		
	TMO2.5-6	2.5				.01-100	.01-100	.02-50	.05-20	7.95		
	TMO4-6	4				.02-200	.02-200	.05-150	.1-100	7.95		
	TMO6-1	6	3-200	3-200	5-150	5-50	7.95					
	TMO9-1	9	.15-200	.15-200	3-150	2-40	7.95					
	TMO16-1	16	3-120	3-120	.7-80	.5-20	7.95					
D		T	T2-1	2	.050-600	.050-600	1-400	5-200	3.95			
			T3-1	3	5-800	5-800	2-400	—	4.45			
			T4-2	4	2-600	2-600	5-500	2-250	3.95			
			T8-1	8	.15-250	.15-250	25-200	2-100	3.95			
			T14-1	14	2-150	2-150	5-100	2-50	4.95			
			TMO	TMO2-1	2	.050-600	.050-600	1-400	5-200	7.95		
				TMO3-1	3	5-800	5-800	2-400	—	8.45		
				TMO4-2	4	2-600	2-600	5-500	2-250	7.95		
				TMO8-1	8	.15-250	.15-250	25-200	2-100	7.95		
				TMO14-1	14	2-150	2-150	5-100	2-50	8.45		
FT	FT1.22-1	1.22	.005-100	.005-100	.01-50	.05-25	35.95					
	FT1.5-1	1.5	.1-400	.1-400	5-200	1-100	35.95					
E		FTB	FTB-1	1	2-500	2-500	5-300	1-100	36.95			
			FTB1-6	1	.01-125	.01-125	.05-50	.1-25	36.95			
			FTB-1-75	1	5-500	5-500	5-300	10-100	36.95			
F		T	T-622	1	0.1-200	0.1-200	0.5-100	5-80	3.25			
			T626	1	0.01-10	0.01-10	0.2-5	.04-2	3.95			


■ Denotes 75 ohm models

* FOR A AND B CONFIGURATIONS

Maximum Amplitude Unbalance
0.1 dB over 1 dB frequency range
0.5 dB over entire frequency range

Maximum Phase Unbalance
1.0° over 1 dB frequency range
5.0° over entire frequency range

Philips offers the most 80C5

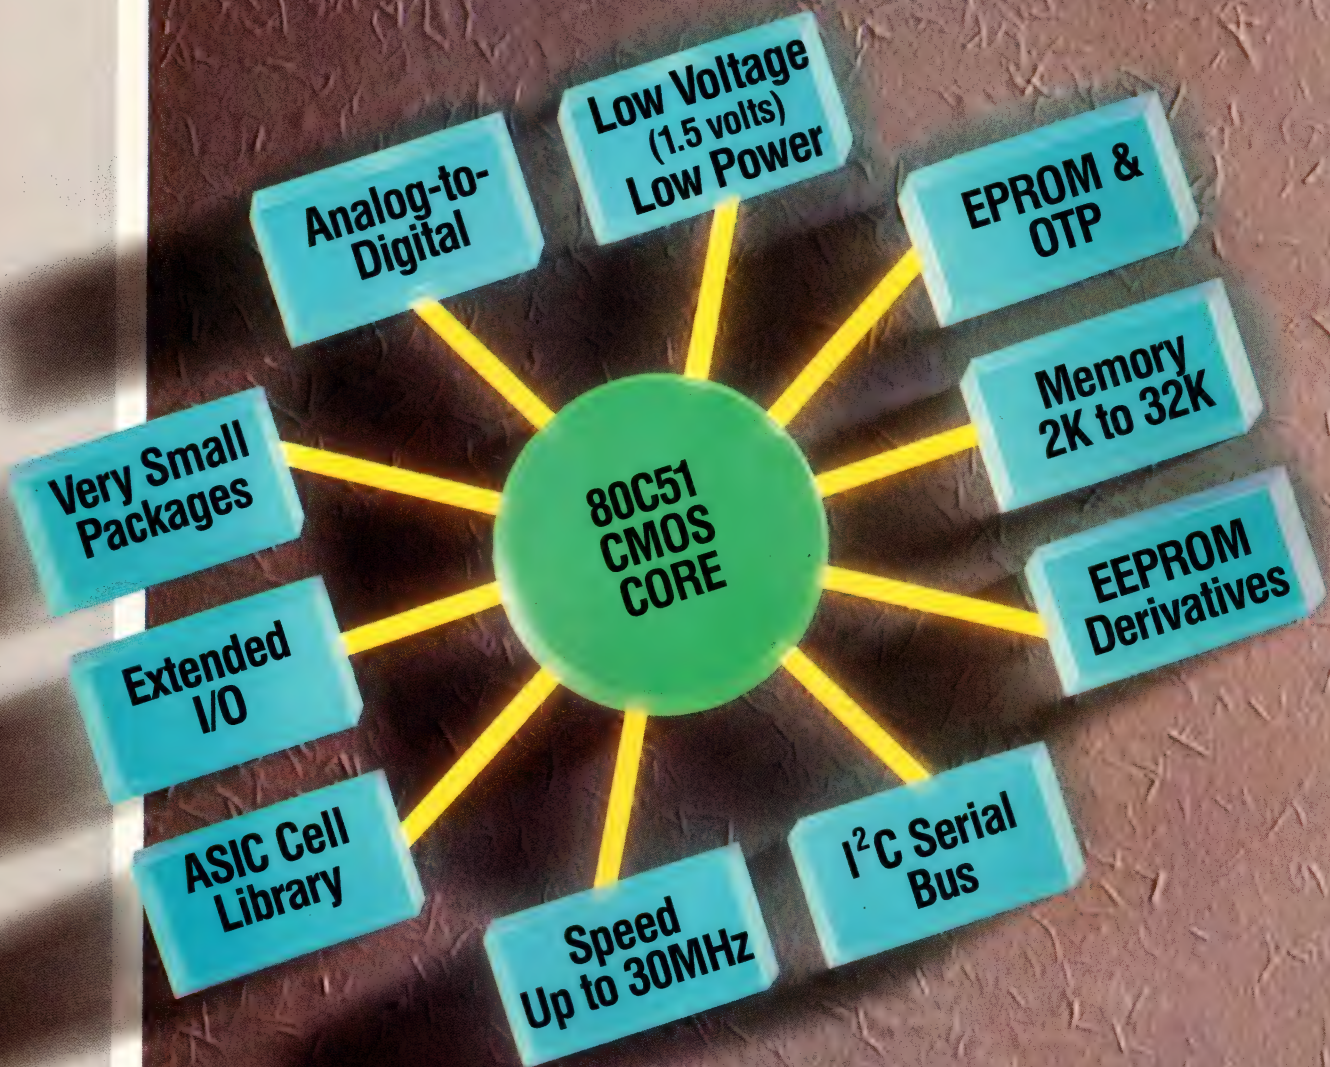

©1990 NAPC

Philips Components

Derivatives in the world.

YOU'LL FIND THE SAME STRATEGY AT THE CORE OF OUR 16- AND 32-BIT MICROCONTROLLERS.

To design the perfect features into your application, choose the industry's most complete and feature-rich family of 8-bit 80C51 and 84CXX microcontrollers.

Available in OTP and EPROM versions, you're assured of faster time to market and cost-efficient low-volume runs. And for designs demanding individual program code, our OTP devices offer you the ultimate flexibility.

At the center of our family is a unique cell methodology. Through it you can select devices with a broad range of features. Like versions with an I²C or CAN serial bus. Plus models with low voltage/low power, A/D, EEPROM, small packaging, PWM and more. Plus, each device is available as a standard derivative and as a core for customized ASIC designs.

You'll also find that we offer a wide variety of embedded memory, ranging from 2K to 32K bytes of program memory (ROM, EPROM or OTP). And up to 512 bytes of embedded data memory (RAM). With speeds of up to 30 MHz.

Plus we're applying the same strategy to 16-bit 68000-compatible and 32-bit SPARC[®]-compatible microcontrollers. So as needs change, you'll have the building blocks to tailor designs.

You'll always have complete development support, too. Because you can choose from a growing list of emulators, programmers and software tools from Philips and third-party vendors including Ashling, Ceibo, Data I/O, Logical Systems, MetaLink, Needham's, Nohau, Tasking and many more.

Today our microcontrollers are the driving force behind thousands of products. For applications ranging from consumer and automotive to

A Sampling Of Our More Than 40 Leading 80C51 Derivatives

Product	OTP	I ² C	ROM	RAM	NO SIMILAR PRODUCT OFFERS:
8XC751	✓	✓	2K	64	24-pin skinny DIP
8XCL410		✓	4K	128	Operation at down to 1.5 volts
8XC851			4K	128	256 bytes EEPROM
8XC552	✓	✓	8K	256	10-bit A/D converter
8XC528	✓	✓	32K	512	512 bytes RAM

communications, aerospace and defense, and computer peripheral products.

For your Microcontroller Derivative Brochure and Data Book, or for more information, contact your local Philips Components sales office.

SPARC is a registered trademark of SPARC International, Inc., based on technology developed by Sun Microsystems, Inc.

Argentina
 (01) 541-4261
Australia
 (02) 439 3322
Austria
 (0222) 60 101-820
Belgium
 (02) 5256111
Brazil
 (011) 211-2600
Canada
 SIGNETICS
 (416) 826-6676
Chile
 (02) 77 38 16
Colombia
 (01) 2 49 7824
Denmark
 01-54 11 33
Finland
 358-0-50 261
France
 (01) 40 93 80 00
Germany (Fed. Republic)
 (040) 3296-0
Greece
 (01) 48 94 339/48 94 911
Hong Kong
 (0)-42 45 121
India
 (022) 49 30 311/49 30 590
Indonesia
 (021) 51 79 95
Ireland
 (01) 69 33 55
Italy
 (02) 6752.1
Japan
 (03) 740 5028
Korea (Republic of)
 (02) 794-5011
Malaysia
 (03) 73 45 511
Mexico
 (16) 18-67-01/02
Netherlands
 (040) 78 37 49
New Zealand
 (09) 605-914
Norway
 (02) 68 02 00
Pakistan
 (021) 72 57 72
Peru
 (014) 70 70 80
Philippines
 (02) 86 89 51 to 59
Portugal
 (019) 6831 21
Singapore
 35 02 000
Spain
 (03) 301 63 12
Sweden
 (018-78 21 000
Switzerland
 (01) 488 22 11
Taiwan
 (886) 2-5005899
Thailand
 (02) 233-6330-9
Turkey
 (01) 17927 70
United Kingdom
 (01) 580 6633
United States
 SIGNETICS
 (408) 991-2000
Uruguay
 (02) 70-40 44
Venezuela
 (02) 241 75 09
Zimbabwe
 47211



PHILIPS

2 8 6 DESIGNER'S TOOL KIT

AT MOTHERBOARD
CORE LOGIC CHIP SET
40MB IDE DRIVE
ORCAD SCHEMATIC DISKETTES
AND DESIGNER'S MANUAL
WD USER'S MANUALS
AND MORE

 WESTERN DIGITAL

Western Digital is a registered trademark of Western Digital Corporation.

Would you rather have what's in Box Number One or Box Number Two?

The Western Digital Designer Kit gives you everything you need to start and complete your next design. All in one handy box.

A box that lets you avoid a lot of headaches and hassles. Such as all the begging, pleading, and conniving necessary to get the parts that are necessary.

The designer kit gives you a Western Digital 286 Motherboard, the WD286-LPM16. You also get a 4-chip FE3600 AT Core Logic Set. The WD16C452 Serial/Parallel Controller.

The WD37C65 Floppy Disk Controller. The WDPVGA1A VGA Controller. The WD93044-A 40Mb IDE Drive. 512K RAM. All the cables you'll need for the drive and the keyboard. An expansion slot riser card. LPM Utilities Diskettes. ORCAD Schematic Diskettes and Designer's Manual. Complete data sheets for all the Western Digital chips. And a Western Digital User's Manual.

The entire Western Digital Designer Kit costs just \$999. Obviously, rounding up all the parts by yourself would take far more money. And far more time.


All you need to supply is a little brain power. And before you know it, your next great idea will be off the drawing board and into production.

The Western Digital Designer Kit is available for a limited time. And in limited quantities. So call your favorite Western Digital distributor now.

And let's make a deal.

Almac Electronics at 206-643-9992.
Anthem Electronics at 408-453-1200.
Hall-Mark Electronics at 214-553-2171.

Pioneer-Standard Electronics at 800-874-6633.
Pioneer Technologies Group at 800-227-1693.
Wyle EMG at 408-727-2500.

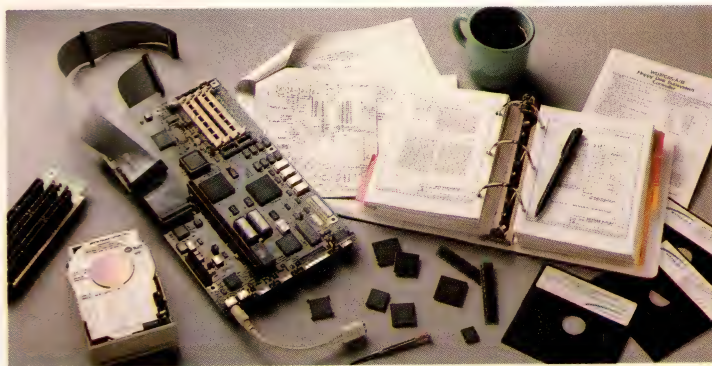

Matched sets, unmatched performance.




WESTERN DIGITAL

Be Brilliant At In Production



7:05 am: Breakfast

Suddenly, between bites, the answer to that new system design jumps right into your brain. But how to make it work in silicon? Use an Actel field programmable gate array!




8:50 am: Design

You warm up the design program on your 386 and put in the final touches. Then a quick rule check and 25 MHz system simulation with the Action Logic System software.



11:00 am: Place & Route

You watch the system place and route all 1700 gates (out of 2000 available) in under 40 minutes. 100% automatically! A final timing check. Then think of something to do until lunch.



12:00 pm: Lunch

Remember lunch? Normal people actually *stop working* and have a nice meal — right in the middle of the day! With Actel's logic solution, this could become a habit.

Actel Field Programmable Gate Array Systems.

They're a feast for your imagination.

Actel's ACT™ 1 arrays bring you a completely new approach to logic integration. Not just another brand of EPLD, PAL® or LCA™ chips. But true, high density, desktop configurable, channeled gate arrays.

They're the core of the Action Logic System, Actel's comprehensive design and production solution for creating


your own ASICs. Right at your desk. On a 386 PC or workstation. With familiar design tools like Viewlogic™, OrCAD™, and Mentor™.

And do it in hours instead of weeks. Even between meals.

How? With features like 85% gate utilization. Guaranteed. Plus 100% automatic placement and routing. Guaranteed. So you finish fast, and never get stuck doing the most


Actel FPGA Product Family		1010A	1020A
Equivalent Gates	Gate Array	1200	2000
	PLD/LCA	3000	6000
User I/O		57	69
System Clock (MHz)		20-40	20-40
Availability		NOW	NOW
Technology (micron)		1.2	1.2

Breakfast And n By Dinner.




1:15 pm: Program

You load the Activator™ programming module with a 2000-gate ACT 1020 chip and hit "configure." Take a very quick coffee break while your design becomes a reality.



1:25 pm: Test

You do a complete, real-time performance check, with built-in test circuits that provide 100% observability of all on-chip functions. *Without* generating any test vectors.



4:00 pm: Production

Your pride and joy is designed, created, tested, and off to the boys in Production. And you're finished way ahead of schedule! Better think of something to do until 5:00.



6:00 pm: Dinner

Remember dinner? Normal people actually go home and eat with their families. On your way, start thinking about how Actel's logic solution can help you be brilliant tomorrow.

tedious part of the job by hand.

Design verification is quick and easy with our Actionprobe™ diagnostic tools, for 100% observability of internal logic signals. Guaranteed. So you don't have to give up testability for convenience.

In fact, the only thing you'll give up is the NRE you pay with full masked arrays. You can get started with an entry level Action Logic System for under \$5000. Guaranteed.

And Actel FPGAs are even 883 mil-spec compliant.

You can be brilliant right now

with 1200- and 2000-gate devices, and a whole new family of 8000-, 4000- and 2500-gate parts are on the way. Call 1-800-227-1817, ext 60 today for a free demo disk and full details about the Action Logic System.

It could make your whole day.


Actel

Risk-Free Logic Integration

© 1990 Actel Corporation, 955 E. Arques Ave., Sunnyvale, CA 94086. ACT, Action Logic, Activator, and Actionprobe are trademarks of Actel Corporation. All other products or brand names mentioned are trademarks or registered trademarks of their respective holders.

CIRCLE NO. 50

REMEMBER WHEN SQUARE WAVES WERE SQUARE?

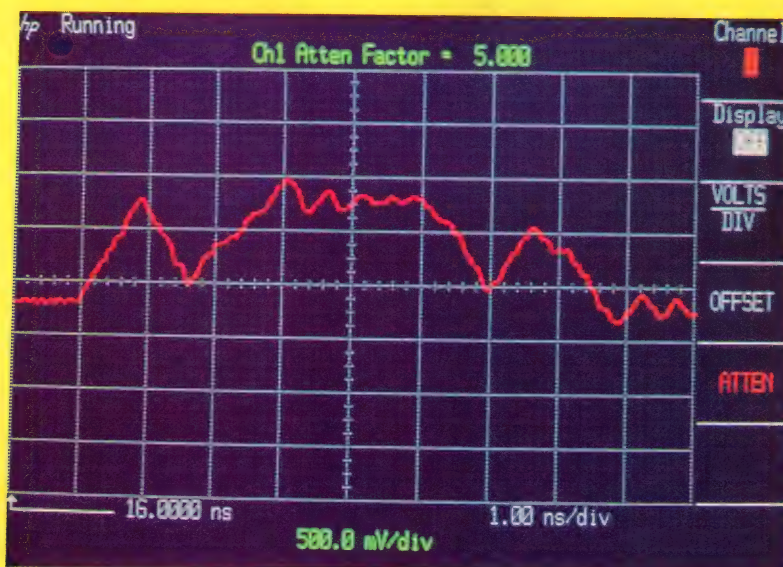

Typical Digital Waveform, circa 1990
Clock rate > 100 MHz
Rise/Fall Time < 0.5 nsec.
Equivalent microwave signal > 1GHz

THAT WAS THEN. THIS IS NOW.

If you're designing today's high speed digital ICs, circuits or systems, you're probably looking at clocks of 100 MHz or faster, with signal components exceeding 1GHz. At these speeds, digital signals assume the characteristics and problems of microwaves.

Welcome to the future.

At Cascade Microtech we offer high speed T&M solutions based on measurement technologies bred and proven in microwaves, and now available for today's digital world.


Our high frequency microprobing equipment and computer-aided test software will let you accurately characterize circuits, devices, packages, and even boards. *At their full operating speeds.* So you can quickly eliminate timing skew, degraded signal edges, ground bounce, and other high speed problems.

Circle 32 for Information Only

Free Booklet

To introduce you to high frequency microprobing, and help you create products that perform better and more reliably, we've prepared a comprehensive booklet, *"High Speed Digital Microprobing: Principles and Applications."*

For your free copy, use the reader service card, write, or call Jerry Schappacher at **(503) 626-8245**.

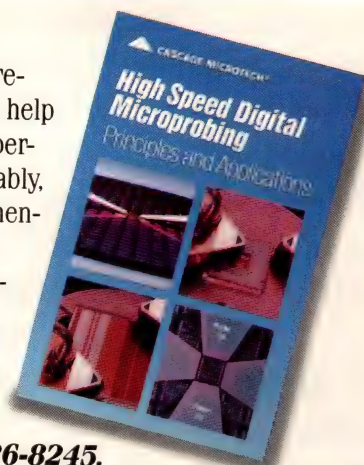

CASCADE MICROTECH®

Circle 33, Have a sales engineer contact me now

14255 SW Brigadoon Ct.
Beaverton, Oregon 97005

RISC HARDWARE DEBUG TOOLS

Instruments spur RISC into the real-time race



RISC μ Ps' speed makes them candidates for the fastest embedded real-time systems. But designers may have to look to unfamiliar tools for debugging time-critical hardware/software interactions.


Dan Strassberg,
Associate Editor

Most applications for RISC (reduced-instruction-set computer) μ Ps have been in computers and workstations, but embedded real-time systems based on RISC processors are starting to proliferate. Debugging embedded systems—in particular, exorcising the time-critical hardware/software interactions that cause them to misbehave—is distinctly different from debugging a workstation. Often, the software-based debugging tools useful for debugging a computer won't work in real time, so they can't handle the whole task of debugging an embedded system. Designers of RISC-based systems no longer need to depend solely on software debugging tools, however.

Hardware debugging tools—ICEs, logic analyzers, and ROM emulators—are becoming available for RISC-based systems. But these tools aren't necessarily what designers of earlier generations of embedded systems relied on. In a sense, many of these new hardware debugging tools are less sophisticated than those for systems based on CISCs (complex-instruction-set computers). One reason for the apparent backward step is that designing hardware debugging tools for RISC-based systems

is anything but simple (see box, "RISC debug: perils, pitfalls, and pointers"). For designers of in-circuit emulators, for example, the extremely high clock rates and pipelined instructions of RISC processors are but two of the major challenges the ICs present.

Indeed, some tool vendors assert that without close cooperation between designers of RISC chips and designers of ICEs, in-circuit emulators won't exist for RISC μ Ps. These critics of ICE technology claim that without help from the chip designers, the complexity of designing an ICE for a RISC chip will preclude bringing the instrument to market until late in the chip's life cycle. But late in its life cycle, a chip forms the basis for few new designs and hence re-

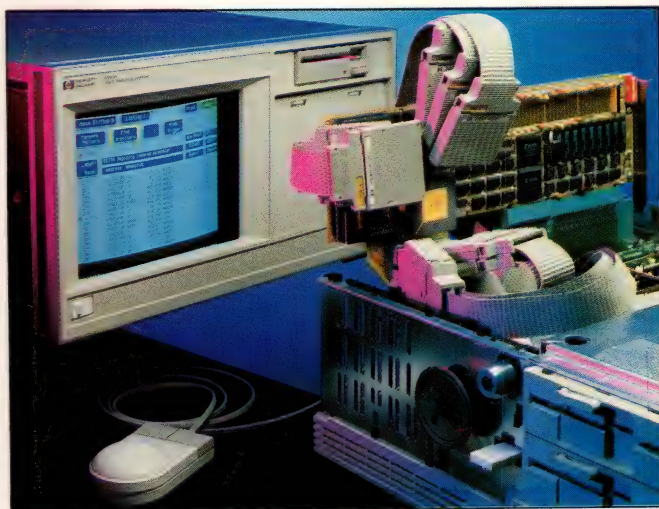

If you don't yet have a prototype of your target board, you can often obtain an evaluation board, such as this one for Motorola's 88000 family. The board plugs into the ISA bus, which lets you use a single PC for code development and debugging. Here, a Hewlett-Packard 16500 logic-analysis system puts the board through its paces.

TECHNOLOGY UPDATE

RISC hardware debug tools

quires few debugging tools. So, according to these pessimists, without support from chip vendors, ICE vendors won't be able to make a profit from RISC tools and thus won't offer them.

Cooperation yields tools

Thanks to cooperation between a few chip vendors and ICE vendors, some RISC chips are getting ICE support early in their life cycles. Notable among these chips are Advanced Micro Devices' AM29000 and Intel's i960CA. AMD developed an active program of supporting tool vendors even before the availability of 29000 silicon. AMD's ef-

forts have paid off with 29000 ICEs from such vendors as Hewlett-Packard, Step Engineering, and Embedded Performance (Table 1).

Intel, in a turnabout from its stance on its CISC chips, has also actively solicited tool vendors' support for its RISC chips. The firm is one of the few μ P vendors with an in-house development-tool operation. That operation will compete with third parties in the i960 market. (Although Intel has seen third parties introduce many tools for its CISC chips, the company actively markets its own CISC tools and is a major supplier of such tools.)

To date, Intel's liaisons with hardware-tool vendors have produced just one offspring, Step's Express 960. The ICE connects to an IBM PC/AT computer via a parallel link and embodies an architecture that makes possible nonintrusive real-time emulation at frequencies as great as 25 MHz. The instrument's emulation processor doesn't replace the target processor; instead, the two μ Ps work in concert, executing the same code. The ICE's introductory price of \$13,500 is less than half the cost of some ICEs for 32-bit CISC μ Ps. Delivery is 60 days ARO. Another major supplier of ICEs, Applied Microsystems

RISC debugging: perils, pitfalls, and pointers

In the design of hardware debugging tools for systems based on RISC μ Ps, the chips' high clock rates are just the beginning of the tool designers' problems. These problems also affect the users of such tools.

Although each processor presents its own challenges, certain features are generic. RISCs tend to perform several operations in parallel. This parallelism has encouraged many chip designers to use multiple external buses, which require IC packages with large numbers of pins. Pin-grid-array (PGA) packages are common; they are through-hole mounted and probing their leads is well understood—if not always easy. However, the high cost of PGAs has motivated designers to replace them with less expensive packages, such as plastic quad flatpacks. Unfortunately, these packages are surface mounted and have fine-pitch leads for which probing techniques are not as well developed.

The large number of pins requires that hardware debug tools have many channels. For example, compare the channel requirements for logic analysis of a popular CISC μ P, Motorola's 68030, with those of a RISC. The 68030 requires probing 96 pins. A similarly thorough job of probing a RISC processor can require making contact with more than 200 pins—perhaps as many as 250. Obviously, adding channels raises an instrument's price, although not all RISC tools cost more than their CISC counter-

parts. For example, Step's Express 960 ICE costs less than half what you'd have to pay for some full-featured ICEs for 32-bit CISC μ Ps. From Tables 1 and 2, you can get an idea of the cost of RISC ICEs and of logic analyzers equipped for RISC debugging.

Where RISC designers have chosen to multiplex addresses and data onto a single external bus, the bus speed can make your head spin. Unlike CISC processors, whose bus cycles usually span several clock cycles, RISC bus cycles normally correspond to a single clock cycle. But where the bus is multiplexed, you can have addresses valid on, say, the rising edge of a square-wave clock and memory data valid on the falling edge. IC manufacturers have already announced RISC chips that use such schemes. The MIPS R3000 is one of them. Its maximum clock rate is 33 MHz, but its bus, in effect, operates at twice that speed. When debugging a system based on this chip, you must capture data going to or from memory just 15 nsec after you capture the address. Your debug hardware must sort out what is an address and what is memory data.

Passive probing can be precarious

Designers of RISC debugging tools must also be sure that the debug hardware doesn't alter the data by, for example, capacitive loading. When the chip's package geometry severely limits the space between

TECHNOLOGY UPDATE

Corp (AMC), intends to introduce an i960 ICE in early 1991.

Earlier this year, AMC announced a new type of hardware development tool called the CodeTAP. This instrument performs many, but not all, ICE functions. The first CodeTAP is for an Intel CISC μ P, the 80386, and costs \$5000—a fraction of the price of a full-featured ICE for a high-performance μ P. AMC will not comment on whether it has RISC CodeTAPs under development, but acknowledges that it began receiving inquiries about such products soon after announcing the CodeTAP 386.

Like AMC's CodeTAP, Intel's

Table 1—Representative RISC ICEs

Vendor	Model	Supported processor	Price ¹	Comments
Embedded Performance	SYS29K	Am29000 Am29005	\$15,000	Other supported products include R3000, R3000A, and R3001. Host can be IBM PC/AT or workstation from Sun, DEC or HP.
Hewlett-Packard Co	64774B	Am29000	\$38,000	Has 512k bytes of emulation memory; \$33,000 without memory. Use HP9000 Series 300 as host.
Intel	ICE960KB	i960KA/KB	\$16,495	Requires IBM PC or compatible computer with 640k bytes of RAM, 1M byte of expanded RAM, 20M-byte hard disk, and MS-DOS V3.3.
Step Engineering	Adapt II	Am29000 Am29027	\$13,500	Step offers an extensive set of integrated hardware and software development tools for these ICs. Use PC or ASCII terminal as host.
	Express960	i960CA	\$13,500	

Notes: 1. Approximate US list price of the minimum usable configuration. Vendor-supplied software required for ICE operation is included; cost of the host program-development system is not included.

pins, the debug tool—whether it's a logic analyzer or an ICE—must use passive probing to save space. But miniature passive probes that do not excessively load or distort 66-MHz signals are decidedly at the cutting edge of technology.

In addition to high-speed buses, a component central to RISC designs is cache memory. When the cache is on the CPU chip, as it is with many RISCs (Motorola's 88000 family is one exception), you can't get at points you will probably need to see during debugging. What you really need is a special "bond-out" version of the processor—one in which the chip vendor brings certain internal nodes to pins. Bond-out versions of CISC processors aren't as readily available as tool vendors would like (Ref 1), and RISC bond-out chips are even harder to come by.

For designers of RISC debug tools as well as for designers of RISC-based systems, pipelined instructions are another vexing μ P feature. (The problem is not unique to RISCs—some CISC processors also use pipelines.) If the processor doesn't execute every instruction in the queue—for example, if it skips a sequence of instructions at a program's branch point—determining what the CPU is doing can challenge even an experienced troubleshooter. A related problem is understanding exactly what happens when the processor flushes the pipeline.

Underlying most of the RISC debugging process is the intimate relationship between the high-level-

language compiler you use, the code it generates, and your system hardware—especially the CPU. There are very few instances where you'll use assembly language to code RISC software, so you'll be writing nearly all of your code in a high-level language. Although the output of any compiler is CPU specific, the efficiency with which a RISC performs a task depends critically on how efficiently the compiler uses the chip's resources. This compiler dependence is far greater with RISCs than with CISCs. Therefore, your selection of a compiler is extremely important. Equally important is the selection of software and hardware debugging tools that work well with the compiler and with each other.

As far as optimizing code is concerned, using a RISC can be a double-edged sword. The good news is that a RISC processor may very well give you so much computing power that you don't need to devote a lot of effort to software performance analysis and code optimization. The bad news is that these tasks are usually more complex with a RISC than with a CISC, especially if you have no experience in optimizing RISC code. Both chip and tool vendors point out that if your application demands that you optimize code, your entire tool set—not just your performance-analysis tools—will be a major factor in determining how smoothly you can accomplish the job.

TECHNOLOGY UPDATE

RISC hardware debug tools

\$4000 DB960CADIC in-circuit debugger is aimed at letting members of large development teams debug code modules prior to system integration. The small board—which has a stock i960CA chip, a ROM containing a retargetable debug monitor, and an RS-232C/RS-422 port—plugs into the target system in place of the μ P. Connect the serial port to an IBM PC running the MS DOS version of Intel's C960 C compiler (\$700), and you can do a great deal of source-level debugging.

Of course, if you have a 12-person development team, you may balk at building 12 prototypes of your target CPU board so that each team member can use an in-circuit debugger. Intel's solution to that problem



State-analysis at 100 MHz; capacitive loading of 8 pF max; custom disassemblers for RISCs, including Intel's i960CA; and an integral IBM PC/AT-compatible computer make the PM 3655 logic analyzer from Philips/Fluke an excellent choice for RISC debugging.

For more information . . .

For more information on the hardware debugging tools discussed in this article and related products for RISC-based systems, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you read about their products in EDN.

Applied Microsystems Corp
Box 97002
Redmond, WA 98073
(800) 426-3925;
in WA, (206) 882-2000
FAX (206) 883-3049
Circle No. 700

Arium Corp
1931 Wright Circle
Anaheim, CA 92806
(714) 978-9531
FAX (714) 978-3341
Circle No. 701

Biomation Corp
19050 Pruneridge Ave
Cupertino, CA 95014
(800) 538-9320;
in CA, (408) 988-6800
FAX (408) 988-1647
Circle No. 702

Embedded Performance Inc
28040 San Tomas Expressway #100
Santa Clara, CA 95051
(408) 980-8833
FAX (408) 980-9686
Circle No. 703

Fujitsu Microelectronics Inc
50 Rio Robles
San Jose, CA 95134
(800) 523-0034
FAX (408) 943-9293
Circle No. 704

Hewlett-Packard Co
19310 Pruneridge Ave
Cupertino, CA 95014
(800) 752-0900
Circle No. 705

Intel Corp
3065 Bowers Ave
Santa Clara, CA 95051
(800) 548-4725
Circle No. 706

Motorola Inc
6501 William Cannon Dr W
Austin, TX 78735
(512) 891-2138
FAX (512) 891-2943
Circle No. 707

Philips Test and Measurement
Bldg TQ3-1, 5600 MD
Eindhoven, The Netherlands
Phone local office
Circle No. 708

In the US:
John Fluke Mfg Co Inc
Box C9090, MS 213A
Everett, WA 98206
(800) 443-5853;
in WA, (206) 847-6100
Circle No. 709

Step Engineering
Box 3166
Sunnyvale, CA 94088
(800) 538-1750;
in CA, (408) 733-7837
FAX (408) 773-1073
Circle No. 710

Tektronix Inc
Box 12132
Portland, OR 97212
(800) 245-2036
Circle No. 711

VLSI Technology Inc
8375 S River Pkwy
Tempe, AZ 85284
(602) 752-6227
FAX (602) 752-6000
Circle No. 712

VMetro A/S
Sognsvelen 75
N-0855 Oslo 8, Norway
472 39 46 90
FAX 472 18 39 38
Circle No. 713

VMetro Inc
2500 Wilcrest, Suite 550
Houston, TX 77042
(713) 266-6430
FAX (713) 266-6919
Circle No. 714


VOTE . . .

Please also use the Information Retrieval Service card to rate this article (circle one):

High Interest 515


Medium Interest 516

Low Interest 517

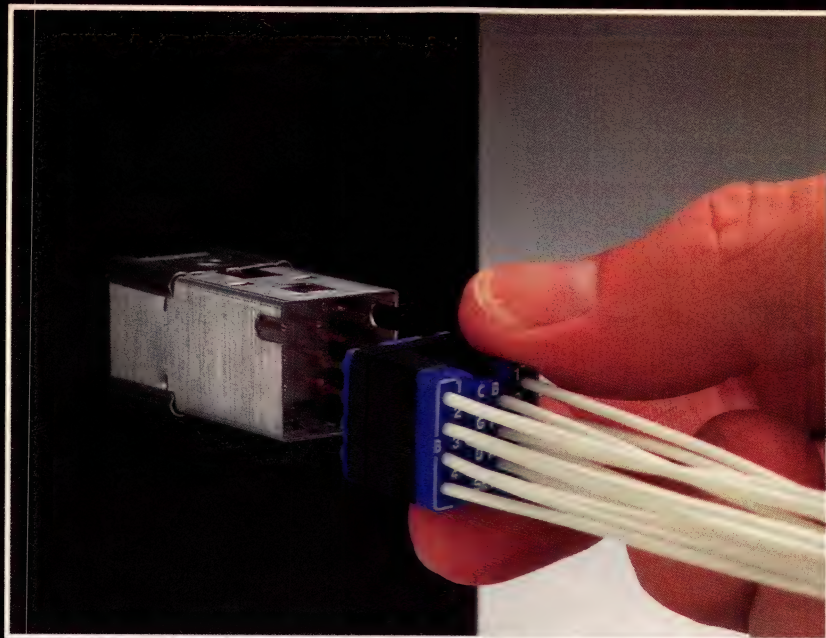

The solderless switch with the right connections.

Our QUIK-CONNECT™ module is physically separate from the switch. It can be pre-wired without solder and pre-checked for correct continuity. The QUIK-CONNECT™ module can then simply be pressed into place in the Vivisun Series 95 switch.



It's also compatible with NVIS night vision goggles per MIL-L-85762A. A unique optics system eliminates the glare. When voltages are

trimmed, the switch is easily readable with the unaided eye. It's also readable in direct sunlight and deadface when not energized.

Compact and light. No other Mil-Spec switch can match it. Options: High-Impact Shock • Dustproof/Dripproof/Watertight/Splashproof • Split Ground • Standard Solder Terminations • EMI

Contact us today.



AEROSPACE OPTICS INC.

3201 Sandy Lane, Fort Worth, Texas 76112
(817) 451-1141 • Telex 75-8461 • Fax (817) 654-3405

CIRCLE NO. 51

*Vivisun Series 95,
the advanced QUIK-CONNECT™
solderless pushbutton switch.*



VIVISUN 95™

SERIES

MIL-S-22885/108

TECHNOLOGY UPDATE

RISC hardware debug tools

is to have you use its \$3500 EV 80960CA CPU evaluation boards in place of the additional prototypes. Both chip vendors and tool vendors offer such evaluation boards for a variety of RISC processors. Some of these boards plug into the ISA bus of IBM PC-compatible computers, thus letting you do code development and at least partial testing on one machine.

Something you can't do with an in-circuit debugger is real-time tracing. For that operation you need an ICE, and at the moment, RISC ICEs are scarce.

But just because a particular RISC has no ICE, don't assume that there are no hardware debugging tools for it. In many cases, you can obtain a logic analyzer with hardware and software that some vendors sell together under names such as "disassembler pod" or "analysis package." Many of these packages include disassemblers that feature user-definable mnemonics. (Some vendors refer to the processor-specific hardware units as preprocessors and the software as inverse assemblers.) Compared with ICEs, logic-analyzer-based RISC debug tools are rather plentiful (Table 2).

At least one vendor, Arium, offers a ROM emulator that works with its RISC-compatible logic analyzers. The emulator plugs into the ROM sockets of your target system, replacing the chips you would normally plug in. With the emulator, you can easily modify the code that will ultimately reside in ROM because that code temporarily resides in RAM. Arium's product uses high-speed static RAMs and connects to the firm's ML-4400 logic analyzer. All communication between the emulator and the target system occurs through the ROM sockets. The analyzer's serial port lets you download code from your host system,



To support the 88100, Tektronix's DAS 9200 uses the 92DM35 support package. A single connector probes the 181-pin PGA. The analyzer monitors all cached and noncached program activity in real time at speeds as fast as 33 MHz.


Table 2—Representative logic analyzers that support RISCs

Vendor	Model ¹	Max state-analysis speed	Supported processor	Price ²	Comments
Arium	ML4400S	50 MHz	88100	\$16,000	256k-byte ROM emulator
		25 MHz	R3000	\$9600	\$1995 extra.
Biomation	CLAS 4000	50 MHz	CY7C601 (SPARC)	\$47,000	Packages support R3000, Am29000, 88100, 88200, i860, i960, and CY7C611.
Fluke	PM 3655/R	100 MHz	i960CA R2000	\$13,200	400-MHz timing analysis \$5500 extra.
	PM3585/90	50 MHz	See note 3.	\$10,800	200-MHz timing analysis standard.
Hewlett-Packard Co	1650B ⁴	35 MHz	88200	\$9000	Preprocessors for i860 (PGA), 88100, 88200, and R3000 ⁵ . Bus interfaces for Am29000, 88100, 88200, and i960CA.
Tektronix	DAS 9200	> 33 MHz	88100 i860	\$40,000	Monitors M and P buses.
VMEtro	PMA-030	25 MHz	88100 and 88200	\$9000	Monitors M or P bus; for \$18,000, monitors both. Require terminal or PC.

- Notes:** 1. In general, to specify a functioning logic-analysis system, your purchase order must list model numbers for a mainframe and a group of system components. This column shows only the mainframe model number.
2. These are approximate US list prices of complete systems equipped to work with the listed processor.
3. Introduction date of this product is October 1, 1990. Analyzer currently provides general-purpose RISC support.
4. In general, H-P's RISC accessories also work with the 1652B logic analyzer/scope and 16500A modular logic-analysis system.
5. Preprocessor for R3000 is offered by a third party. With R3000, analyzers support processor operation to 17.5 MHz.

A picture is worth a thousand points in a time interval measurement.


SR620 Output

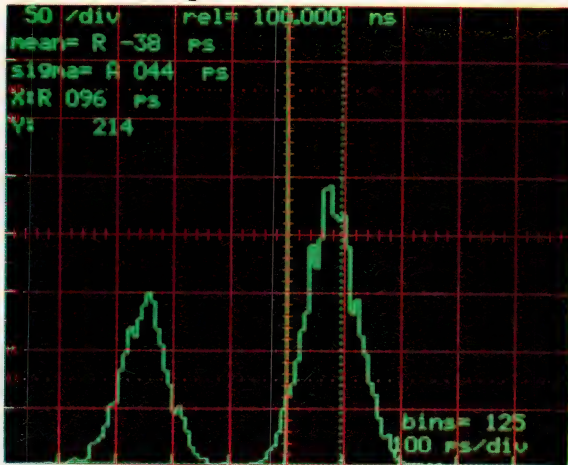

The SR620 brings graphic statistical analysis to time interval and frequency measurements. The SR620 shows you more than just the mean and standard deviation - multimode frequency distributions or systematic drift for example. Histograms or time variation plots are displayed on any X-Y oscilloscope, complete with Autoscale, Zoom, and Cursor functions. Hardcopy to plotters or printers is as easy as pushing a button.



HP5370B Output

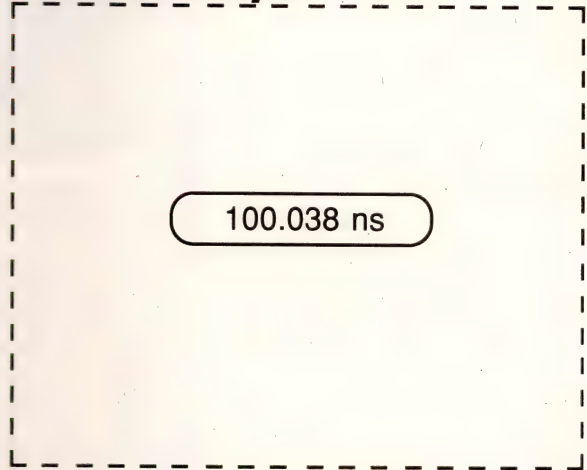

Of course, the SR620 does everything else you'd expect from a high resolution universal counter, such as frequency, period, time interval, pulse width, rise / falltime, and phase measurements. The SR620 offers 25 ps single-shot time and 11 digit frequency resolution and complete statistical analysis, all for a fraction of the cost of comparable instruments.

For the whole picture, call SRS and ask about the SR620.

SR620

\$4500

- 4 ps single shot least significant digit
- 25 ps rms single shot resolution
- 1.3 GHz maximum frequency
- 10^{-9} Hz frequency resolution
- Sample size from 1 to 1 million
- Frequency, period, time interval, phase, pulse width, rise and fall time
- Statistics - mean, standard deviation, min max, and Allan variance
- Analyzer display on any X-Y oscilloscope
- Hardcopy to printer or plotter
- GPIB and RS232 interfaces
- Optional oven timebase



STANFORD RESEARCH SYSTEMS

TECHNOLOGY UPDATE


RISC hardware debug tools

and you can also use the instrument's built-in editing functions to modify the code.

According to some logic-analyzer vendors, you don't need an ICE and you never did: Aside from a logic analyzer and its accessories, the only other debug tool you might need is a software debugger. ICE vendors vehemently refute this allegation, and they have a point: Proponents of the competitive debug technologies don't claim that their tools provide the degree of control and visibility of the processor's internal workings that an ICE does. Nevertheless, a logic analyzer can be an invaluable debugging tool, with or without an ICE.

Pick μ P and tools together

There are few endeavors in electronics that evoke a unanimous response from dozens of engineers. In most respects, such diversity characterized the responses of the suppliers of hardware debug tools for RISC-based systems that EDN contacted for this article. But in one area, the respondents were unanimous. All agree that you should select the debugging tools you plan to use—that is, both the hardware and software tools—at the same

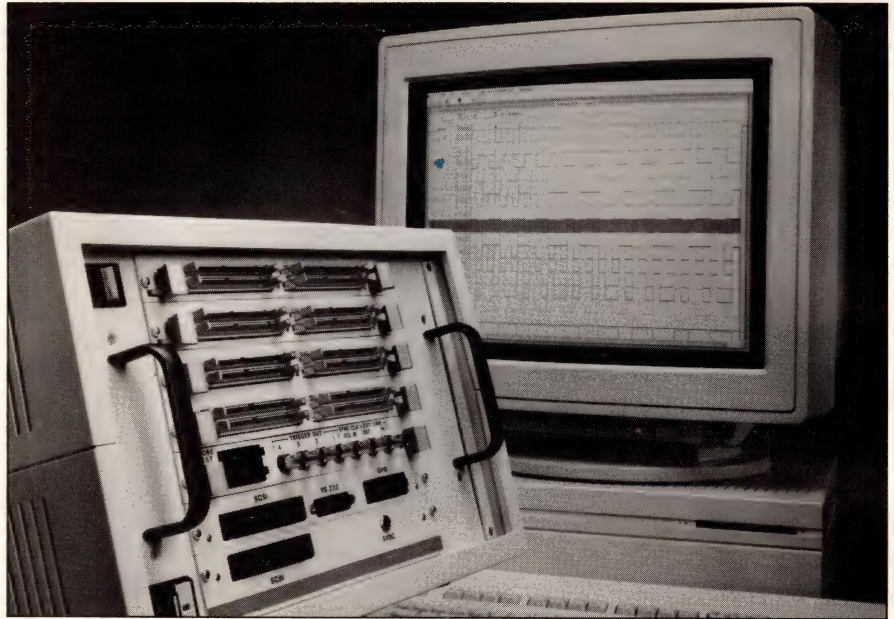


RISCs have high pin counts and high speeds. Because of its modular architecture, Biomation's CLAS 4000 logic analyzer can have 384 channels. It performs state analysis at 50 MHz max and timing analysis at 200 MHz max. You can get the analyzer with analysis packages for the Motorola 88100 and the CY7C601 SPARC.

time you select the μ P and the high-level-language compiler. Before making any of your selections final, satisfy yourself that each element you select works well with all of the others.

Above all, if you are tempted to base an embedded-system design on a RISC μ P, satisfy yourself that the potential for payoff justifies the

risks. (Yes . . . the pun is intentional.) At this stage of RISC technology, you must still call any embedded-system design based on a RISC processor a pioneering effort, and pioneering usually entails some pain. Often, though, the rewards make the hardships worthwhile. Such was the case for a customer of one of the tool vendors EDN contacted. Using the RISC chip let him reduce a lighting-control system with eight CISC-based boards to a single PC card costing only a quarter as much as the originals. **EDN**

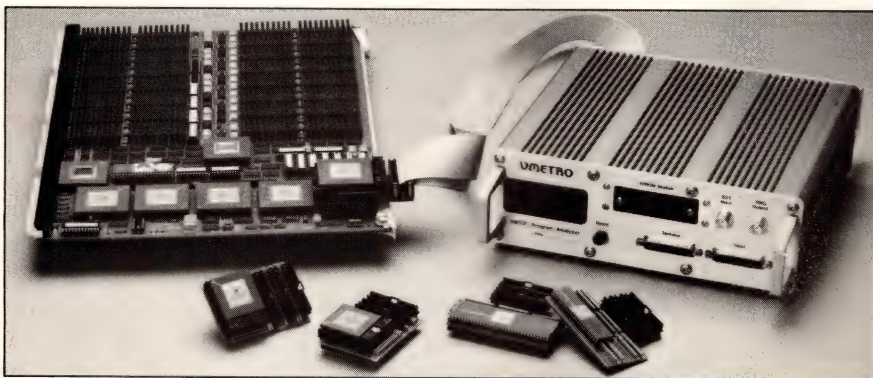

Billed as a real-time program analyzer, VMetro's PMA-030 is, in fact, a specialized logic analyzer. You can use it with an ASCII terminal or a PC acting as a terminal emulator, or you can use several units with a workstation running windowing software. The analyzer offers trace memory of 2k 92-bit samples. Among RISCs, it explicitly supports the 88100 and 88200.

Reference

1. Strassberg, D, "In-circuit emulation: ICs and tools tame tough technology," *EDN*, October 26, 1989, pg 73.

Article Interest Quotient
(Circle One)

High 515 Medium 516 Low 517

0.99 Power Factor Corrected Switcher With Universal Input



1000 watt single and multiple output switchmode power supplies operate from 120 VAC 15 Amp service, or as Universal Input from 90 to 264 VAC line without strapping. Units meet IEC 555-2 harmonic distortion and UL, CSA, VDE, EN, and FCC safety and EMI specifications. Other models operate from 48 VDC or 120/230 VAC.

Contact: **Qualidyne** (619) 575-1100

Qualidyne ► **CIRCLE 641**

Compact, Modular Switchmode Supply Meets Class B EMI




Compact power supplies can provide up to 400 watts with hundreds of volt/amp combinations of from 1 to 7 DC outputs. Units are available with in-line or side-mount I/O terminals and operate from 120/230 VAC. Options include Auto Current-Sharing with a isolated Power Supply Fail signal, ideal for N+1 use.

Contact: **Qualidyne** (619) 575-1100

Qualidyne ► **CIRCLE 642**

Low Profile/Low Cost Supplies Are Only 2" to 3" High

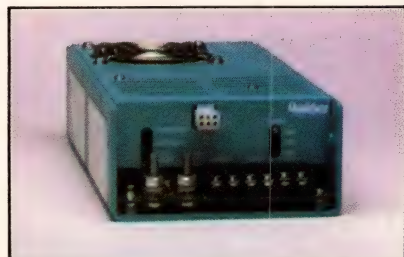

Compact switchers feature robust, high-current main and auxiliary outputs to suit OEM needs. Single and multiple output models provide from 250 to 1000 watts. Wide user-adjustment ranges, auto AC line select, integral fan-cooling, margining, and inhibit are among the features and available options.

Contact: **Qualidyne** (619) 575-1100

Qualidyne ► **CIRCLE 643**

Modular 5" x 5" & 5" x 8" AC-DC Switchers & DC-DC Converters

Hundreds of models with up to 9 independent outputs can be easily configured to meet custom requirements without delays. Providing 800 to 3000 watts, units operate from 48 VDC or 120/230 VAC. All meet EMI and safety specs from UL, CSA, EN, FCC and VDE. Wide adjustable and current sharing outputs available.

Contact: **Qualidyne** (619) 575-1100

Qualidyne

► **CIRCLE 644**



1990-91 CATALOG

SWITCHMODE POWER SUPPLIES

■ AC-DC ■ DC-DC CONVERTERS ■ 0.99 POWER FACTOR

■ Low Cost

- Low Profile Case
- 250 to 600 Watts
- 1 to 4 Outputs



■ User-Configurable

- 1 to 9 Outputs
- Quick Customized Supplies
- Modular Construction

■ Feature-Intensive

- Low Profile Cases
- 1 to 9 Outputs
- 500 to 1000 Watts



■ Wide Adjustment Ranges

- 600 to 1000 Watts
- 2V to 56VDC Outputs
- 1 to 7 Outputs

■ 1KW to 3KW

- 1 to 9 Outputs
- N + 1 Redundancy



Qualidyne
Lambda Group of Unitech plc

UL CSA VDE BABT

FREE NEW 66-PAGE CATALOG/BINDER

CALL OR WRITE: **QUALIDYNE**

3055 DEL SOL BLVD.


SAN DIEGO, CA 92154

PHONE: (619) 575-1100

FAX: (619) 429-1011

► **CIRCLE 645**

Break Through 7ns

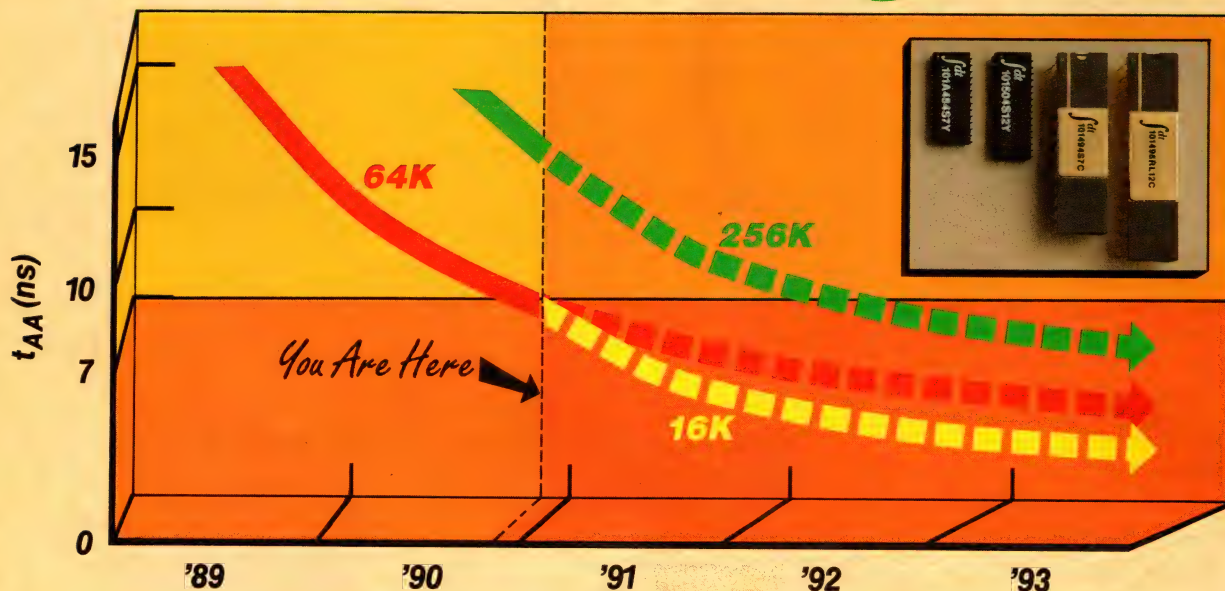

with BiCEMOS™ ECL

Speed Leadership

Design tomorrow's fastest systems today. Our IDT10484 (4K × 4) will be the fastest high-density BiCMOS memory to run primary caches in ECL systems. At 7 ns, the IDT10494 (16K × 4) is the fastest BiCEMOS 64K ECL SRAM available in volume production today.

In addition, we offer the densest BiCEMOS ECL RAM, the IDT10504 (64K × 4), at 12 ns. And our new 12 ns IDT10496RL (16K × 4) synchronous self-timed SRAM (STRAM)

offers registered inputs, latched outputs, and self-timed write for easier system design.

Each of our ECL SRAMs is available today in 10K, 100K, and 101K configurations in 300 mil SOJ and 400 mil Sidebrazed DIP packages.

Technology for the '90s

We engineered BiCEMOS technology to offer the best of both worlds: the low power consumption of CMOS with the high speed of bipolar technology.

Count on our BiCEMOS ECL to take you through the 7 ns speed barrier for 64K densities. We believe our BiCEMOS ECL will achieve speed increases of 20% a year every year for the next five years, making BiCEMOS the technology for the '90s.

Samples Available

Call or FAX us today for samples and a copy of the new **BiCEMOS ECL Product Information** booklet with information on designing with BiCEMOS ECL for ultra-high-speed systems.

BiCEMOS ECL SRAM Family

Part No.	Description	Max. Speed (ns)	Typ. Power (mW)
IDT10484	16K (4K × 4) 10K ECL	7	700
IDT100484	16K (4K × 4) 100K ECL	7	500
IDT101484	16K (4K × 4) 101K ECL	7	700
IDT10490	64K (64K × 1) 10K ECL	8	420
IDT100490	64K (64K × 1) 100K ECL	8	320
IDT101490	64K (64K × 1) 101K ECL	8	420
IDT10494	64K (16K × 4) 10K ECL	7	700
IDT100494	64K (16K × 4) 100K ECL	7	500
IDT101494	64K (16K × 4) 101K ECL	7	700
IDT10496RL	64K (16K × 4) 10K STRAM	12	1000
IDT100496RL	64K (16K × 4) 100K STRAM	12	800
IDT101496RL	64K (16K × 4) 101K STRAM	12	1000
IDT10504	256K (64K × 4) 10K ECL	12	800
IDT100504	256K (64K × 4) 100K ECL	12	600
IDT101504	256K (64K × 4) 101K ECL	12	800

BiCEMOS is a trademark of Integrated Device Technology, Inc.

CIRCLE NO. 53

IDT Corporate Marketing
P.O. Box 58015
3236 Scott Blvd.
Santa Clara, CA 95052-8015

(800) 345-7015
FAX: 408-492-8454



When cost-effective performance counts

Integrated Device Technology

PC chip sets reduce chip count



IBM PC-compatible chip sets range from one to six chips and can give you caching facilities, a choice of buses, and power control.

Chris Terry,
Associate Editor

In the six years since Chips & Technologies Inc first produced a VLSI chip set that incorporated all the mother-board logic of an IBM PC/XT, many competitors have added their contributions to the market. If you want to build an IBM PC-compatible computer, you have an almost embarrassingly wide choice of chip sets. You should consider three PC trends when choosing a chip set: one is reducing the price of an average, single-user, 80286-based system; another is the drastic reduction of board size, weight, and power consumption—for example, in notebook-sized and laptop computers; and the third is delivering more and more computing power with 80386- and 80486-based systems. Your chip-set choice thus depends on the application you have in mind.

At the low end, some OEMs are still finding a market for PC/XT clones. This market is diminishing, largely because the IBM PC/AT bus is more convenient and more flexible than the PC/XT bus

and has become a de facto industry standard for medium-performance systems running at 12 MHz or less. Nevertheless, PC/XT clones still have a place in situations where low price is the prime consideration. VLSI Technology continues to offer its 2-chip Super-XT chip set at \$25 (1000). The chip set lets users set the clock speed to 8 or 10 MHz and provides extended-memory management.

286 still has the lion's share

Intel regards the 80286 as obsolete and is trying hard to create more demand for the high-end 80386 and 80486. However, Charles Parr, marketing director for logic products at VLSI Technology Inc, points out that 12-MHz 80286-based machines still form the largest part of the PC-clone market. He believes that the 80286 will retain its supremacy in the home and office markets for some years to come. He says that 286-based machines have by far the best price/performance ratio in the under-16-MHz category and that their per-




This 3-chip set from VLSI Technology supports the 80386DX processor at clock speeds of 12 to 33 MHz. The Topcat 386DX chip set can manage as many as 64M bytes of 32-bit memory (4M-byte DRAMs arranged in four banks) and can operate in both caching and noncaching modes.

DON'T TOUCH THAT DIAL...

Unlike mechanical potentiometers, our DS1267 Dual Digital Potentiometer Chip doesn't have to leave the circuit board surface and come up to a dial. Our pot is software-controlled, so you can make calibration settings to pots on the board without ever opening the enclosure. Dials become obsolete; you change settings from the keyboard.

No more tearing apart the system to get at the pots. No more getting in there with a teeny tiny little screwdriver to make minute adjustments.

Digitally calibrate gain and offset of an op amp for tight, closed-loop control.

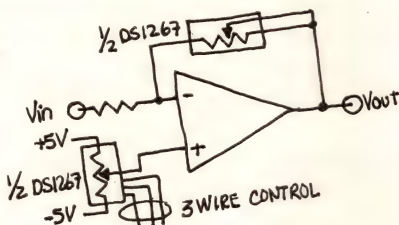

EXACTITUDE

Ever try to repeat the setting of a 10 turn pot? For all the trouble you put into those excruciating adjustments, you can't read the wiper position directly. So maybe you make the same change again. And again. Until you get it right.

If it has to be right the first time, try setting *our* pot. You write two 8-bit words through a serial port to an on-chip register. That number is stored in a read/write memory and the setting is read electronically. Which means the setting is what you want it to be. Exactly.

In fact, we are so exact we have 512 settings. Or you can divide those in half and create two independent 256-position pots. An unlimited number of potentiometers can be controlled by daisy-chaining using only three signal wires.

QUICK AND QUIET


Just how quiet is the Digital Pot? We spec'd it quieter than -120 dB. Our customers have measured it at less than -137 dB -- about the thermal noise of a transistor.

How did we do this? First, the Digital Pot doesn't have to stop at every setting along the way -- it can hop directly to the desired resistance. Once the setting has been made, there is no activity in the chip to cause noise.

Second, because all electronics remain on the card, you don't have to run wires out to dials on the surface of the equipment, which eliminates that source of noise.

And as if all this isn't enough, our pot withstands the high temperatures and cleaning fluids required for surface mount assembly. Subject your mechanical pot to those temperatures and see what happens.

The Digital Pot is available in 10K, 50K, and 100K ohms. If you're ready to throw away your screwdriver, give us a call.

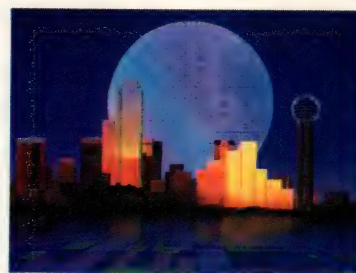

DALLAS SEMICONDUCTOR

4401 SOUTH BELTWOOD PARKWAY
DALLAS, TEXAS 75244-3292
TELEPHONE: 214-450-0448
FAX: 214-450-0470

TECHNOLOGY UPDATE

PC chip sets

formance is quite adequate for most home and office applications.

Mark Griffin, a development analyst for Texas Instruments' PC Systems, concurs. He cites reports, both from the US and from Taiwan, which indicate that despite predictions that the 80386 would take a big bite out of the 80286 market, the 80286 is still the most-used processor, with 6.5 million units shipped in 1988, possibly declining to 4.5 million per year by 1994.

Just how long 80286-based machines will hold their own against competition from the more powerful 16-bit 80386SX and 32-bit 80386DX machines is still a matter for speculation. Corporate users, who are accustomed to using increasingly powerful computers as tools, are reluctant to tolerate average performance when superior performance is available. If they all shout loud enough and forcefully enough to bring 80386-based machines to their desks, the increased sales volume may quickly bring prices down to the point where 80286-based machines are no longer attractive even to those with tight budgets.


VLSI Technologies covers all the bases by offering a wide range of chip sets. For simple, 12-MHz PC/AT-compatibles, it offers the VL82CPCAT-12QC, a 5-chip set that costs \$30 (1000). The VL82CPCAT-16QC version for 16-MHz systems costs \$33 (1000). If you need still better performance, the company offers a 6-chip set, the VL82CPCPM-16/20QC, which provides page-mode memory management and other improvements over the 5-chip set. The 16-MHz version costs \$38; the 20-MHz version costs \$41 (1000).

Chips & Technologies also offers chip sets for 12- to 16-MHz PC/ATs. Its Neat 4-chip set allows zero-wait-state operation at 12 MHz and can operate at 16 MHz with 0.7 wait states if you're using inexpensive

100-nsec dynamic RAMs (DRAMs). The chip set's memory-management system allows single-bank page mode or 2-way and 4-way page-interleaved modes, as well as LIM EMS 4.0 (Lotus-Intel-Micro-

page-interleaved modes. The chip costs \$28 to \$32, depending on quantity.

ACC Microelectronics Corp also offers a single 208-pin PC/AT support chip. The ACC-2036 can work

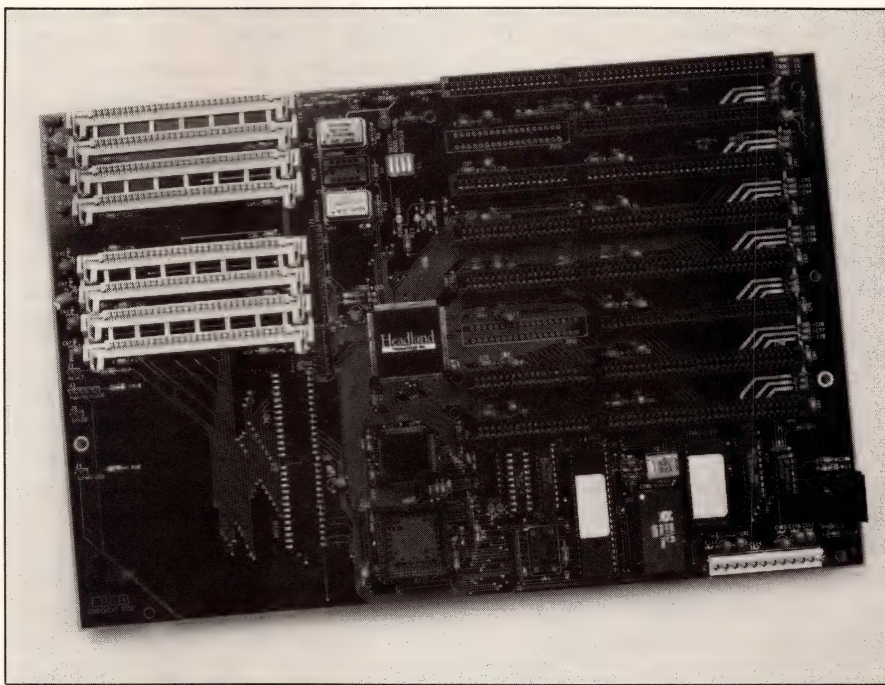

Most vendors supply evaluation boards for their chip sets. The HT21 board lets you evaluate Headland Technology's 80286 chip sets.

soft Expanded Memory Standard). The set costs \$49 (1000).

The advent of laptop and notebook-sized computers has created a need to reduce the size and power consumption of the mother board. Several companies succeeded in cramming all the functions of the PC/AT mother board into a single VLSI chip. Texas Instruments, for example, recently released its Tact82411 208-pin chip, which is fabricated in 1- μ m CMOS and can operate at clock speeds as high as 20 MHz. The chip's features include software configuration for wait states, command delays, and memory organization. It can operate in single-bank page mode, which lets you make use of less expensive DRAMs, or you can use 2- or 4-way with both 80286 and 80386SX proc-

essors at clock speeds as high as 25 MHz. Its memory-management features support 2- or 4-way page-interleaved mode, extended or expanded memory, and shadow RAM for BIOS and video use. This chip includes a number of power-saving features that suit it for laptop computers. These features include an interface to a power-management chip, a selectable clock that in standby mode can let the system run at only 1 MHz, and optional slow DRAM refresh. The single-unit price is \$100.

Another single PC/AT support chip for both 80286 and 80386 processors is available from Headland Technology Inc. The Hit Single 386SX/286 is a 208-pin chip that requires only three external TTL chips and can operate at speeds as

TECHNOLOGY UPDATE

PC chip sets

high as 16 MHz in 80386 mode and 20 MHz in 80286 mode. Like the ACC Microelectronics chip, this chip supports shadow RAM, a hardware implementation of LIM EMS 4.0, page mode, 2- or 4-way page-interleaved mode, and power-management functions. It costs \$100 (1000).

One of the chief advantages of both the ACC-2036 and the Hit Single 386SX/286, as well as other dual-mode chip sets, is that they provide an easy upgrade path to higher performance at a minimal cost.

The 208-pin single support chip appears to be the limit of economically feasible size reduction of PC/AT mother-board logic. Chip-on-board technology let Intel produce the WildCard, a 4×2-in. card containing an 8088 CPU, an 8087 math coprocessor, and all PC/XT support logic. Many people hoped that this technology would be widely adopted and result in drastic board-size reductions in a wide range of applications. In fact, the technology has turned out to be very expensive and is cost effective only for special-purpose computers. As a result, Intel is no longer offering the WildCard. Randy Bachman, a regional sales manager for Via Technologies Inc (Sunnyvale, CA), concedes that a market for boards that use this technology may exist, but says that no ASIC vendors are now selling dice for chip-on-board mounting.

Onward and upward

All of the chip-set vendors previously mentioned are offering chip sets for the 80386SX and 80386DX; many are offering or developing comparable chip sets for the next step—the 80486. One factor that may accelerate growth in the 386/486 market is the release of Microsoft's Windows 3.0. This operating system, which is DOS-based and

supports a large proportion of the software already available for PCs, may kill any chance that OS/2 ever had of superseding PC-DOS. People who have tried Windows 3.0, either in beta test or after its release, say that it is fast, easy to use, and very flexible. However, for maximum performance, it does require the speed and bus width of 80386- and 80486-based computers.

Plenty of chip sets support either the 16-bit 80386SX or the 32-bit 80386DX. Headland Technology, for example, offers the GCK131, a set of three 160-pin chips that lets you use an 80387 math coprocessor and as much as 24M bytes of memory. The configuration and performance options are stored in EEPROM; this feature eliminates the need for switches or jumpers. The chip set costs \$100 (1000).

VLSI Technology offers the Topcat series; the VL82C286 is a dual-mode 2-chip set that works with either the 80286 or the 80386SX, and supports LIM EMS 4.0 up to the maximum 32M bytes of memory. It costs \$50 (1000). The 386DX is a 3-chip set that supports Weitek's (South Bend, IN) 3167 math coprocessor as well as Intel's 80387, and runs at clock speeds of

12 to 33 MHz. This chip set also stores the configuration and performance options in EEPROM, and has many features that reduce power consumption in laptop systems. The memory-management system lets you use as much as 64M bytes of onboard RAM and allows for timing compatibility with older software. You can also use slower add-in expansion cards because a proprietary feature prevents the false decoding of bus addresses. The chip set costs \$75 (1000).

Texas Instruments offers the Tact83000, a 3-chip, cache-based set that works with the 80386SX at speeds as high as 33 MHz. The three chips are the PC/AT bus interface unit, the memory-control unit, and the data-path unit. The chip set and four other logic chips are all you need for a 16-bit PC. The 3-chip set costs \$50 to \$60, depending on quantity. By adding another data-path unit, you can expand the bus width to 32 bits for a system based on the 80386DX. The cost of the four chips ranges between \$60 and \$75.

EDN

Article Interest Quotient (Circle One)

High 518 Medium 519 Low 520

For more information . . .

For more information on the IBM PC chip sets discussed in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

ACC Microelectronics Corp
3295 Scott Blvd, Suite 400
Santa Clara, CA 95054
(408) 980-0622
FAX (408) 980-0626
Circle No. 715


Chips & Technologies Inc
3050 Zanker Rd
San Jose, CA 95134
(408) 434-0600
TLX 272929
Circle No. 716

Headland Technology Inc
46221 Landing Pkwy
Fremont, CA 94538
(415) 656-7800
Circle No. 717

Texas Instruments
Semiconductor Group (SC-9044)
Box 809066
Dallas, TX 75380
(214) 995-6611, ext 700
Circle No. 718

VLSI Technology Inc
8375 South River Pkwy
Tempe, AZ 85284
(602) 752-8574
FAX (602) 752-6000
Circle No. 719

The Motorola Computer Group Invites You To Become Their Newest Boardmember.

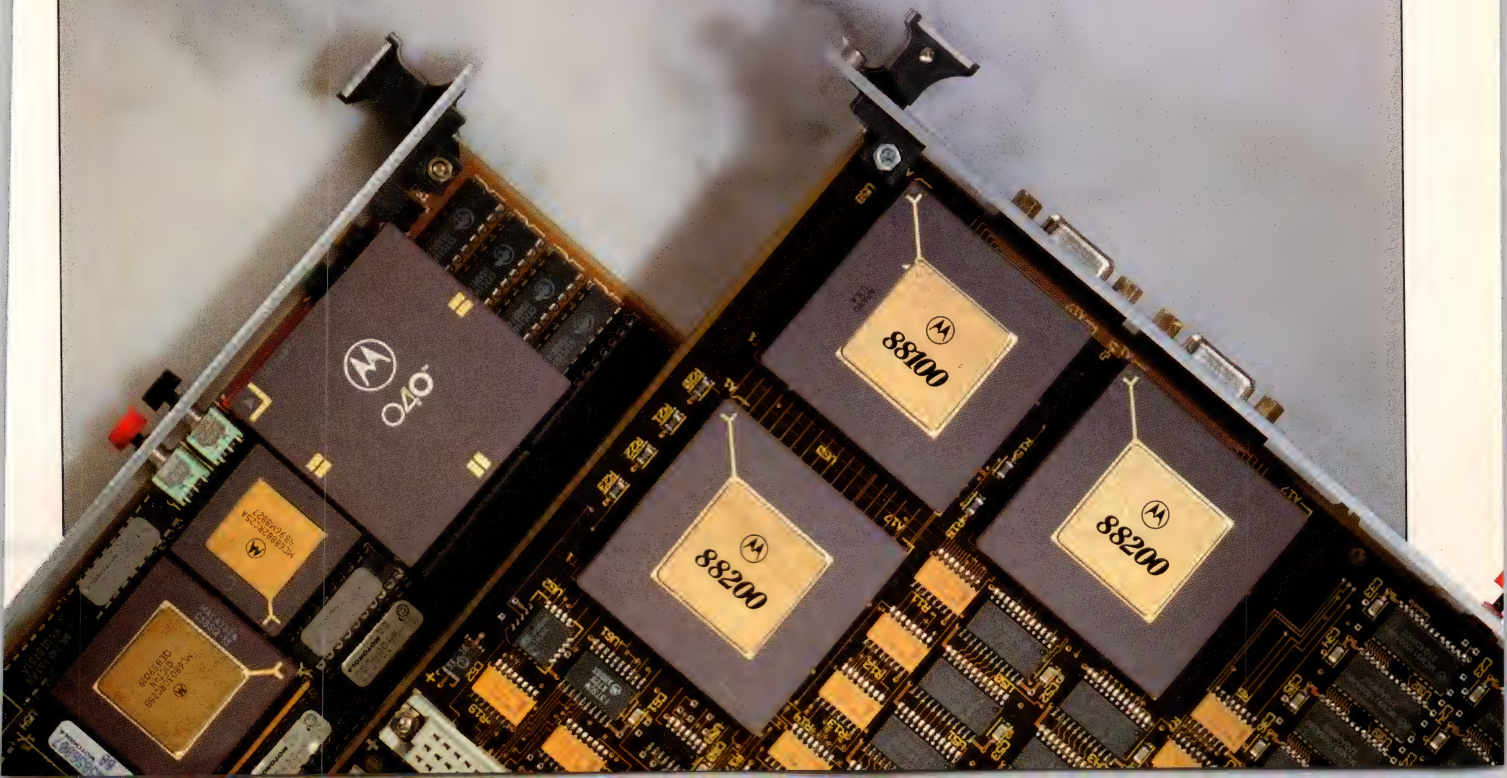

Take Advantage Of Board-Level Partner



© 1990 Motorola, Inc. Motorola Computer Group is a member of Motorola's General Systems Sector. VMEExec is a trademark of Motorola, Inc. All other product or brand names mentioned are trademarks or registered trademarks of their respective holders.



All That Our VME Partnership Has To Offer.

Become
A Partner Today.
BUSCON Booth #505

Once you've seen what Motorola brings to the table, we think you'll agree it's everything you need. Like the most complete line of VME products, services and engineering support available anywhere. Award-winning quality. Competitive pricing. All from the company that pioneered VME technology, and whose product line ranges from ICs to boards to full systems. And includes everything in between.

You decide exactly what you need from our more than 100 VME products at every level of price and performance. From CPU boards, like our new '040-based MVME165, to memory boards, to communications boards. And the industry's widest assortment of development tools, software resources, and technical support.

A partnership with Motorola not only helps you control costs, but even more importantly, speeds your time to market.

Our products include more functionality with a higher level of integration to accelerate your development efforts. And because of Six Sigma quality control you can be assured that our products will work right out of the box. It all adds up to the fact that getting you to market sooner is a promise only a company with the resources of Motorola can make good on.

Every Motorola product includes a built-in migration path, so your future product cycles are

assured. Such as providing a way to upgrade from the 68020 to the 68030 to the 68040, or from a 68000 CISC board to an 88000 RISC board with a simple re-compile. Wherever you're headed,

Motorola is going to be there.

And we'll support you during the entire development process. Every board in our product line includes a full suite of board diagnostics available in both a run-time and a source package. This degree of flexibility also extends to our nationwide customer service programs, which run the gamut from total on-

site maintenance to self-maintenance support packages.

For more information, call us today at 1-800-624-8999, ext. 230.

Once you discover the advantages of a partnership with Motorola, you'll see that it's no ordinary board-level decision. It could ensure the future of your company.



At Motorola, Openness Is Standard Procedure

These days, openness has become something of a buzz word, and everybody seems to have a different idea on what is and isn't "open." To us, it's no big mystery. Openness means open architectures, open software, open networking. And open standards like UNIX®, as indicated by our role in founding 88open. It means we're open to helping solve problems with your point of view in mind, not just ours. And it's

been that way ever since we helped introduce VME back in 1982.






That's why Motorola is committed to supporting official and de facto industry standards, interoperable computing between multiple vendors, and non-proprietary open system architectures. It's why we created VMEexec™ to facilitate the

interoperability of different real-time software modules within a common UNIX environment. And it's why we support virtually every networking protocol, including XNS, TCP/IP, DECnet™, MAP/TOP/OSI, SNA, BSC, X.400, and X.25.

This philosophy of openness is the same reason we offer as many VME boards, products and services as we do. It's to our mutual benefit, and after all, isn't that what partnerships are for?



MOTOROLA
Computer Group

ALMAC**CARSTEN****CHELSEA****GRS** ELECTRONICSHamilton **Avnet**

**Bourns Surface Mount
Trimmer Design Kit**
Available From These Distributors

COPYRIGHT © 1990, BOURNS, INC. 7/90

BOURNS

"IT'S YOUR CHOICE"




Which surface mount trimmer is right for your job?

To be sure, you need working samples. Complete specifications. Application details. So Bourns Trimpot makes it easy with its new Surface Mount Trimmer Design Kit.

Everything you need to prototype and test is in one place. Pick from over 200 surface mount trimmers in the most popular sizes, styles and resistance values. Check the specs. Verify the soldering process. All with one convenient kit . . . the industry's first.

Order your kit today from your Bourns distributor. It's the right choice.

— - - Send Me My Free — - -
Surface Mount Design Kit Brochure



Name: _____

Title: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Send to: Bourns, Inc., M/S ADV,
1200 Columbia Ave., Riverside, CA 92507

**BOURNS TRIMPOT**

Bourns, Inc., 1200 Columbia Avenue, Riverside, CA 92507; (714) 781-5500;
European Headquarters: Zugerstrasse 74, 6340 Baar, Switzerland: 042-333333;
Benelux: 070-3874400; France: 01-40033604; Germany: 0711-22930; Ireland: 021-357001; United Kingdom: 0276-692392;
Asia Pacific Headquarters: 510 Thomson Road, Unit 09-01A SLF Building, Singapore 1130; (65) 353 4118; Hong Kong: (852) 5702171;
Korea: (82) 2-556-3619; Japan Headquarters: Nichibei Time 24 Building, 35 Tansu-Cho, Shinjuku-Ku, Tokyo, 162, Japan: (81) 3-260-1411

Call Me Circle 30

Send Literature Circle 31

EDN100190

250-MHz digital storage oscilloscope provides 1G samples/sec for \$10,950

The HP54510A simultaneously samples two 250-MHz-bandwidth channels at 1G samples/sec. Although not the first DSO (digital storage oscilloscope) to offer this impressive, single-shot, real-time performance, at \$10,950 the device is almost one-third the price of its competition. Despite its low price, this instrument does not compromise on single-shot performance or measurement accuracy.

The heart of this DSO is a hybrid consisting of two custom chips developed by the scope manufacturer. One chip is an 8-bit 1G-sample/sec flash A/D converter, and the other is an 8-bit $\times 8k$ -deep memory for storing the converter's output. The DSO uses two of these hybrids, one for each channel.

The manufacturer claims that the hybrid reduces memory space requirements by 98% and A/D and memory cost by more than 50% compared to its previous model, the HP54111D. These hybrids, combined with other custom chips for timebase and triggering, allow the manufacturer to put essentially the entire instrument on a single board.

Keeping instrument manufacturing costs down means little if performance has been compromised. This DSO offers single-shot measurement specifications such as voltage accuracy of 1.25% of full scale and timing accuracy on automatic measurements of 150 psec plus 0.005%.

You may be surprised to find that the scope manufacturer claims better timing accuracy than the 1-nsec



With a rate of 1G samples/sec, the HP54510A DSO makes accurate measurements of single-shot events using waveform reconstruction.


time between samples. The DSO improves timing accuracy by limiting incoming bandwidth to 250 MHz, one-fourth the sample rate, before digitizing the signal. After digitizing the signal, the DSO is able to accurately reconstruct the bandwidth-limited signal and make measurements on the reconstructed signal. What matters on a DSO measuring single-shot events is not average values but variations between minimum and maximum values. In real-world single-shot applications, you don't get a chance to average—you only get one waveform to measure.

To demonstrate the capability of the filter-and-reconstruction method, the manufacturer made 1000 single-shot automatic measurements on a pulse from an accurately characterized pulse generator. The

pulse had a width of 15.000 nsec, a period of 40.000 nsec, and a channel-to-channel delay of 9.000 nsec. Of these 1000 measurements, the minimum period value was 39.873 nsec, the maximum was 40.144 nsec, and the average was 40.001 nsec. Measurements of pulse width and delay exhibit similar accuracy. You might want to try the same single-shot measurements on competitive DSOs.

The DSO can also acquire successive single-shot waveforms at a rate of 400/sec. The instrument can store 290 single-shot acquisitions of 512 points each or use longer records and store fewer acquisitions. This capability is useful for pulse-and-response applications, such as sonar, where high resolution of the transmitted and received waveforms is needed despite relatively

AUDIO PRO

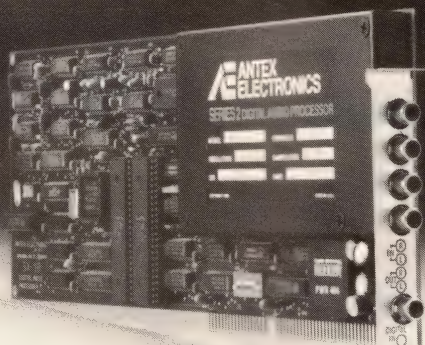

Introducing...CD quality, stereo high fidelity, digital audio you record and playback on your PC-AT/286/386/Model 30 or compatible.

Featuring...real time direct to disk data transfer...16-bit resolution...20Hz to 20kHz audio response...0.005% THD...6.25 to 50kHz programmable sample rate...92dB dynamic range...90db s/n...digital input...4 to 1 ADPCM compression.

Use for digital audio recording, editing, mastering and transmission in broadcasting, entertainment systems, film production, audio/visual presentations and interactive CDI/DVI systems.

If you're an audiophile with microcomputer resources call 1-800-338-4231 (ex. CA.) for details on our Audio Pro...the Series 2/Model SX-10.

ANTEX ELECTRONICS

16100 S. Figueroa St. • Gardena, CA 90248 • Tel (213) 532-3092 • FAX (213) 532-8509

CIRCLE NO. 2

EDN EDITORS' CHOICE

long time periods between events.

Although the DSO is designed for single-shot or real-time applications, it does operate in a repetitive-signal mode. In this mode, timing accuracy increases to 100 psec and bandwidth remains fixed at 250 MHz.

Like other members of the 54500 DSO family, this 22-lb portable scope performs 17 automatic pulse-parameter measurements, has an autoscale key for single keystroke setup, and features full IEEE-488 operation. Trigger control includes time-qualified pattern triggering, which can be used to find and trigger from glitches that are more than 1.75 nsec wide.

—Doug Conner

Hewlett-Packard, 19310 Pruneridge Ave, Cupertino, CA 95014.
Phone (800) 752-0900.


Circle No. 730

The KEL 8900 Series Lower Profile-Higher Density

KEY 8900 SPECIFICATIONS

- * Low Profiles - 7, 8, 9, 10 and 12 mm stacked heights
- * 8 Sizes per profile - 20, 30, 40, 50, 60, 80, 100 & 120 positions
- * "Snap-in" mating
- * Sufficient Normal Forces -150 grams
- * Guide pins for self-alignment
- * Insulator protects contact from damage
- * Temperature resistant (PPS insulator)

Wide Choice of
Mated Heights
& Pin Counts



All eight pin counts of the 8900 Series are available in five mated profiles.

**50 Mil Pitch
2-Piece Connector**



KEL Connectors, Inc. is a subsidiary of KEL Corporation.

CONNECT WITH



KEL CONNECTORS, INC.

1250 Oakmead Parkway, Suite 105
Sunnyvale, CA 94086
408-720-9044; Fax 408-720-1989

KEL Corporation (Japan): Telephone 0423-74-5802; Fax 0423-74-5888
European Office (W. Germany): Telephone 0211-359960; Fax 0211-359810

Demanding Designers Need the Best

OrCAD/SDT III

Schematic Design Tools for the PC



Ease-of-use + Power = Productivity

In today's tough design environment, good engineering tools aren't good enough. You need the best to get the job done.

OrCAD/SDT III offers the power

SDT III comes with the options you'd expect to pay extra for

- **Completeness:** A library of over 6100 parts that you can browse through in a breeze. Utilities to generate Bill-of-Materials, Electrical rules check, create custom library parts.
- **Compatibility:** Over thirty netlist formats; over 50 supported display adapters; over 50 printer drivers; a dozen plotter drivers. We conform to your system better than anyone.

- **Complexity:** 4000+ sheet design capacity for single designs. 200+ levels of hierarchy. Great support for small, simple designs to large, complex hierarchical systems.

- **Control:** SDT III gives you the ability to customize the work environment to make you more productive. This includes user definable macros, text/object sizes, sheet sizes, graphical object editor, even the colors on the screen.

OrCAD/SDT III makes it easy

The lightning fast operation saves time. The intuitive, pop-up menu displays your most likely next action. This means a short learning curve and immediate productivity.

Get our No-risk, Demo Disk

Try before you buy. Get our demonstration disk and see for yourself the solid performance SDT III has to offer.

Once you've given our demo disk a spin, you'll know one of the reasons why OrCAD is the world's leading supplier of PC based CAE tools.

All OrCAD products come complete with one full year of technical telephone support, free product updates and access to our 24 hour BBS.



3175 NW Alcockle Drive
Hillsboro, Oregon 97124
(503) 690-9881

If you would like more information about this or any other OrCAD product, contact your local OrCAD representative.

AUSTRIA Dahms Elektronik 0316/64030-0 Fax: 64030-29	ITALY BRM Italiana 0117/710010 Fax: 0117/710198
BELGIUM INEX (02) 649.99.91 Fax: (02)649.27.92	ITALY MicroData Systems 0187/966123 Fax: 0187/988322
DENMARK/ NORWAY NordCAD 98 17 32 99 Fax: 98 17 37 41	SPAIN Next-For S.A. 504 02 01 Fax: 504 00 69
UK ARS Micro- systems (0276) 685005 Fax: (0276) 61524	SWEDEN Technology Partners (468)790 97 75 Fax: (468)16 77 86
FINLAND Elektrotel OY (358 0)754-3122 Fax: 754-2593	SWITZERLAND Logmatic AG 056/96 01 66 Fax: 056/83 38 40
FRANCE ALS Design (331) 46 04.30.47 Fax: 48 25.93.60	W. GERMANY Compware, GmbH 4940/81 80 74 Fax: 4940/81 10 37

Call or write today for your Demo Disk!


OR8910-INTL

Logic analyzers let you use one probe set for timing and 50-MHz state analysis

Although there is probably no truly objective way to measure ease of use, Philips and Fluke are trying to establish one for logic analyzers. They use a stopwatch to clock the time you take to set up a few fairly standard tests using the pop-up menus of the PM3580 or PM3585 logic analyzer. Then they substitute a top-selling, comparably priced, competitive instrument and time the equivalent procedure. As you might expect, the Philips/Fluke products win handily. The reason for the dramatic difference lies both in the technology of the PM3580 and PM3585 and in the care the products' designers took to understand how engineers use logic analyzers.

You don't have to be a rocket scientist (or a logic designer) to realize that the analyzers' ability to do simultaneous state and timing analysis through a single set of probes saves the time you would need to connect a second probe set. Moreover, not having to put two probes on the pins of an IC in a high-density package (for example a quad flatpack) can save lots of frustration. Aside from that, using one set of probes spares the ICs from having to drive the capacitance of an extra set of probes. Especially in high-speed circuits, avoiding the extra capacitance eliminates a source of measurement errors. The capacitance of the analyzers' probes is 8 pF max.

It is highly likely that designers will use the new analyzers with ICs in high-density packages. The instruments' state-analysis speed is 50 MHz—fast enough for most reduced-instruction-set-computer processors, a class of high-speed devices with high pin counts. Moreover, the analyzers incorporate transitional timing, a feature that,

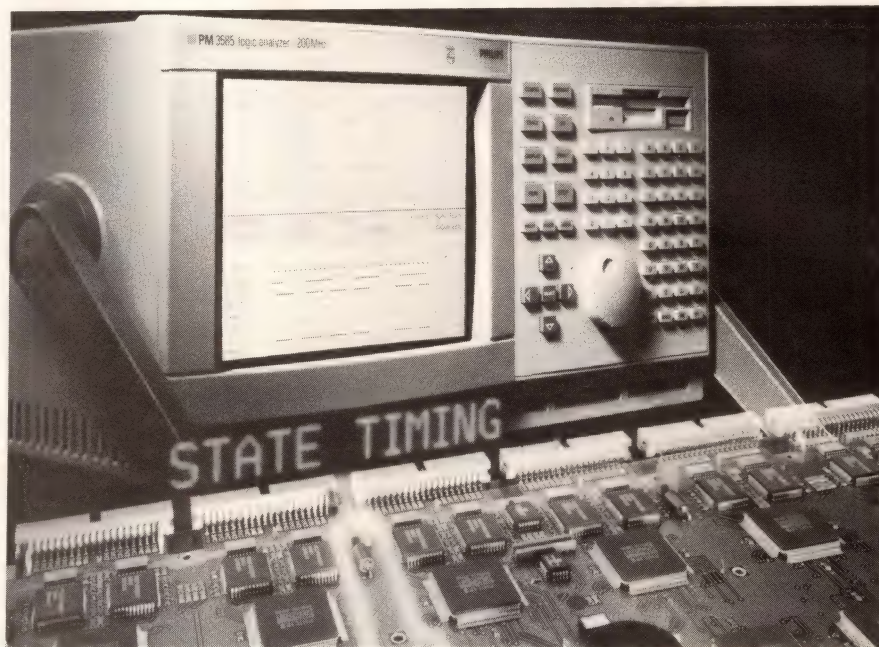

One set of probes handles simultaneous 50-MHz state- and 100- or 200-MHz timing analysis with Philips/Fluke's PM3580 and PM3585 logic analyzers.

in most applications, significantly extends the instruments' memory depth, and in this implementation, guarantees that memory depth is never sacrificed. You can equip either model with 32, 64, or 96 channels. The PM3585 performs timing analysis at 200 MHz and has 2k bits of memory per channel. The PM3580's timing-analysis speed is 100 MHz; it has 1k bits of memory per channel.

The analyzers feature both alphabetic and numeric keypads. Therefore, you can type in information such as signal-name labels more easily than you can enter it on instruments that lack an alphabetic pad. (Designers of those instruments have invented some rather creative schemes to avoid the alphabetic pad. One such scheme was adapted from the user interface of a handheld label maker. On other units, you type on a Qwerty "key-

board" displayed on a touch-sensitive screen.)

As circuit speeds increase, digital designers are increasingly using logic analyzers and scopes together. These units don't overlook that requirement. The analyzers generate a TTL scope-trigger pulse on a BNC connector at any level of the trigger-sequence state machine. In addition, you can program any level to wait for an external trigger.

The PM3580/30 (32 channels) is \$4250; the PM3585/90 (96 channels) is \$10,950.—**Dan Strassberg**

John Fluke Mfg Co Inc, Box 9090, Everett, WA 98206. Phone (800) 443-5853, ext 77. FAX (206) 356-5116.

Circle No. 731

Philips Test and Measurement, Bldg TQIII-4 5600 MD, Eindhoven, The Netherlands. Phone local office.

Circle No. 732



Introducing Zilog's Smart Access Controller... Z180 intelligence and SCC communications together in one package.

Don't throw away your old software.

The Z80 family continues to be the most popular group of intelligent peripheral controllers on the market. With good reason. It's a tribute to Superintegration™ technology and the performance of the controllers themselves. And since each new product in the family, like the SAC™, is based on the same Z80/180 code you'll be able to migrate your existing software easily and effectively. We don't have to tell you how important that is. Here's a list of the fast-growing family of Z80-based intelligent peripheral controllers. It's a list that's not likely to stop expanding any time soon... stay tuned.

INTELLIGENT PERIPHERAL CONTROLLERS

	CPU	System OSC	Memory RAM	DMA	Serial UART	C/S	Timers CTC	Parallel PIO
Z84C01	✓	✓						
Z84C50	✓	✓	✓		✓		✓	✓
Z84C90	✓	✓	✓	✓	✓	✓	✓	✓
Z80180	✓	✓	✓	✓	✓	✓	✓	✓
Z80280	✓	✓	✓	✓	✓	✓	✓	✓
Z84013/C13	✓	✓	✓		✓		✓	✓
Z84015/C15	✓	✓	✓		✓		✓	✓
Z84011/C11	✓	✓	✓	✓	✓	✓	✓	✓
Z80181	✓	✓	✓	✓	✓	✓	✓	✓

The Z80181™ SAC™ Controller is the Smart Access Controller™ that combines two powerful standards. You get Zilog's industry standard SCC™ controller for datacom connectivity together with the popular Z180 CMOS controller. And all that utility comes with the user-friendly Z80* code CPU compatible software.

High integration. High performance. Smart communicator.

The Superintegration™ SAC Controller packs the popular high performance Z180 architecture into a new cell suitable for many datacom and peripheral control applications. You get the SCC single-channel communication cell with two additional UARTS, a 4 x 8-bit counter timer (CTC) and onboard 16-bit I/O. The SAC Controller runs at 10 MHz and drives fast serial communications at 2.5 Mbits/sec. With the reduced 3 cycles per instruction, the SAC Controller gives you Z80 code performance 25% faster. That makes the SAC Controller the highest performance, low power embedded controller around.

The best cost/performance of any embedded controller out there.

Whatever your application — data communications, modems, FAXs, printers, terminals, industrial controls — the SAC Controller combination gives you the best cost/performance ratio. Everything you need for your system is on the chip. The SAC Controller brings you all the advantages of Zilog's Superintegration technology. Off-the-shelf and backed by our solid reputation for quality and reliability.

To find out more about the SAC Controller, or any of Zilog's rapidly growing family of Superintegration products, contact your local Zilog sales office or your authorized distributor today. Zilog, Inc., 210 Hacienda Ave., Campbell, CA 95008, (408) 370-8000.

Right product. Right price. Right away.



ZILOG SALES OFFICES: CA (408) 370-8120, (714) 838-7800, (818) 707-2160, CO (303) 494-2905, FL (813) 585-2533, GA (404) 448-9370, IL (312) 517-8080, NH (603) 888-8590, MN (612) 831-7611, NJ (201) 382-5700, OH (216) 447-1480, PA (215) 653-0230, TX (214) 987-9987, WA (206) 523-3591, CANADA Toronto (416) 673-0634, UNITED KINGDOM Maidenhead (44) (628) 39200, W. GERMANY Munich (49) (89) 672045, JAPAN Tokyo (81) (3) 587-0528, HONG KONG Kowloon (852) (3) 723-8979, KOREA (82) (2) 552-5401, TAIWAN (886) (2) 741-3125, SINGAPORE 65-235 7155, **DISTRIBUTORS:** U.S. Anthem Electronics, Hall-Mark Electronics, JAN Devices, Inc., Schweber Electronics, Vargas Electronics, Western Microtechnology, CANADA Future Electronics, SEMAD, LATIN AMERICA Argentina — Yel. (1) 46-2211, Brazil — Digibyte (011) 581-1945, Semicondutores Profissionais (5) 536-1312.

Rewritable 133M-byte optical drive features 30-msec average seek time

A low-mass read-write head on the Model RMD-5100-S rewritable optical drive results in an average seek time of 30 msec—competitive with medium-performance magnetic disk drives. The unit stores 133M bytes of data on 3½-in. disks and features a 30,000-hr MTBF. The drive includes a SCSI (Small Computer System Interface) controller and is compatible with the SCSI common command set.

The drive uses ANSI-standard 3½-in. rewritable optical disk cartridges. Furthermore, the unit fits in the industry-standard half-height 5¼-in. peripheral mounting slot commonly found on personal computers and workstations. The drive includes a 1-year warranty and features data reliability of less than one hard error in 10^{12} bits read, one soft error in 10^{10} bits read, and one seek error in 10^6 seeks. A combina-

tion of CRC and a long-distance ECC ensures data reliability.

The optical drive produces a sustained transfer rate of 512k bytes/sec. An onboard buffer, however, allows the SCSI controller to perform burst transfers at 1.5M bytes/sec in asynchronous mode and 3M bytes/sec in synchronous mode. The SCSI controller also includes a jumper block that you can use to set the SCSI ID.

The 30-msec average seek time makes the device competitive with magnetic drives. Furthermore, the drive includes a scanning/short seek ability that makes data anywhere within a 128-track band available within 7 msec. A 128k-byte read-ahead cache reduces seek time to the 1-msec range on cache hits. Track-to-track seek time is 1 msec and maximum seek time is 60 msec. The drive spins disks at 2400 rpm,

and therefore features an average rotational latency of 12.5 msec.

Compatibility with the 512-byte sector format proposed by ANSI as an interchange standard results in a cartridge capacity of 128M bytes. The drive also supports the 1024-byte sector format, proposed as an option by ANSI, to achieve maximum capacity of 133M bytes on a cartridge. The drive stores data on 10000 tracks at a density of 1.6 μ m.

The RMD-5100-S weighs 4.41 lbs and dissipates 17W of power typ. It can operate over a temperature range of 10 to 45°C and a humidity range of 10 to 80%. It costs \$2425 and samples are available.

—Maury Wright

Mass Optical Storage Technologies, a Nakamichi Co, 11205 Knott Ave, Cypress, CA 90630. Phone (714) 898-9400.

Circle No. 734



The 30-msec average seek time of the RMD-5100-S optical drive makes the unit competitive with magnetic drives. Furthermore, the 133M-byte unit employs ANSI-standard 3½-in. media and fits in a standard half-height 5¼-in. drive slot.

TEXAS INSTRUMENTS

A PERSPECTIVE ON DESIGN ISSUES:

Creating systems with an analog edge

IN THE ERA OF

MegaChip[®]

TECHNOLOGIES



Advanced Linear can help you raise system performance levels.

A leadership family of analog circuits from Texas Instruments is helping designers meet difficult design challenges.

The evidence is strong. Throughout the design community, systems using the new breed of Advanced Linear functions from Texas Instruments are achieving the keener performance edges that can spell marketplace success.

TI's new analog devices are enabling design engineers to link digital brains to analog worlds more effectively and efficiently than ever before. Some offer new standards of accuracy or speed while others are highly integrated devices combining analog and digital functions on a single chip. The result is superior system performance and design flexibility.

These Advanced Linear functions are the result of leadership process technologies that we at TI firmly believe are the key to the advanced analog devices your future applications will demand.

Intelligent power for automobiles

Designers in the automotive industry face a tough challenge: Handle high reverse voltages and achieve rapid load turnoff while providing fault protection, detection, and reporting and efficient load management. To provide the needed intelligent power devices, we developed one of our newest process technologies, Multi-EPI Bipolar. It is unique because it can combine rugged power transistors with intelligent control functions.

The resulting circuits are now providing reliable, cost-efficient control of solenoids and valves in such automotive applications as antiskid braking systems, electronic transmission controls, and active suspension systems.

Other industry segments are also benefiting from TI's Advanced Linear process technologies. Here are a few of the winning designs to which we have helped add an analog edge:

Toledo Scale

Challenge: Improve the accuracy of point-of-purchase scales by eliminating drift over time and temperature.

Solution: The TI TLC2654 Chopper op amp. Our Advanced LinCMOS™ process makes possible chopping frequencies as high as 10 kHz, reducing noise to the lowest in the industry.



Pulsecom

Challenge: Develop a linecard capable of driving low-impedance loads with greater precision.

Solution: Our TLE206X family of JFET-input, low-power, precision operational amplifiers. These devices offer outstanding output drive capability, low power consumption, excellent dc precision, and wide bandwidth. Fabricated in our Excalibur process, they remain stable over time and temperature.

Leitch Video

Challenge: Design a compact, cost-efficient direct broadcast satellite TV descrambler for consumer use.

Solution: TI's TLC5602 8-bit Video DAC. Our LinEPIC™ process combines one-micron CMOS with precision analog to satisfy the demands of the application for video speeds and low-power operation.

U.S. Robotics

Challenge: Build a modem for high-speed data transmission between computers; allow flexible operation and minimize data errors.

Solution: Our TLC32040 Analog Interface Circuit (AIC). A product of our Advanced LinCMOS process, the AIC combines programmable filtering, equalization, and 14-bit A/D and D/A converters with such digital functions as control circuitry, program registers, and a DSP interface.

Xerox

Challenge: Cut component count and cost of copier systems while boosting reliability.

Solution: Our TPIC2406, a top-performance peripheral driver in a standard DIP package that is capable of driving heavy loads. It is fabricated using our Power BIDEFET™ process which permits greater circuit density and incorporates CMOS technology for low total power dissipation.

Mr. Coffee


Challenge: Design an intelligent coffee maker that brews faster, maintains optimum temperature, shuts off automatically, and has a built-in cleaning cycle.

Solution: Our LinASIC™/LinBiCMOS™ capability permits us to combine both analog and digital library cells with custom analog cells. This results in cost-efficient integration of temperature monitoring, timing, and high-current outputs on a single control chip.

All of these examples point to one conclusion: TI's Advanced Linear functions are adding an analog edge to many system designs. They are contributing significantly to the enhanced system performance that marks a market winner.



WORLDWIDE MERCHANT IC MARKET

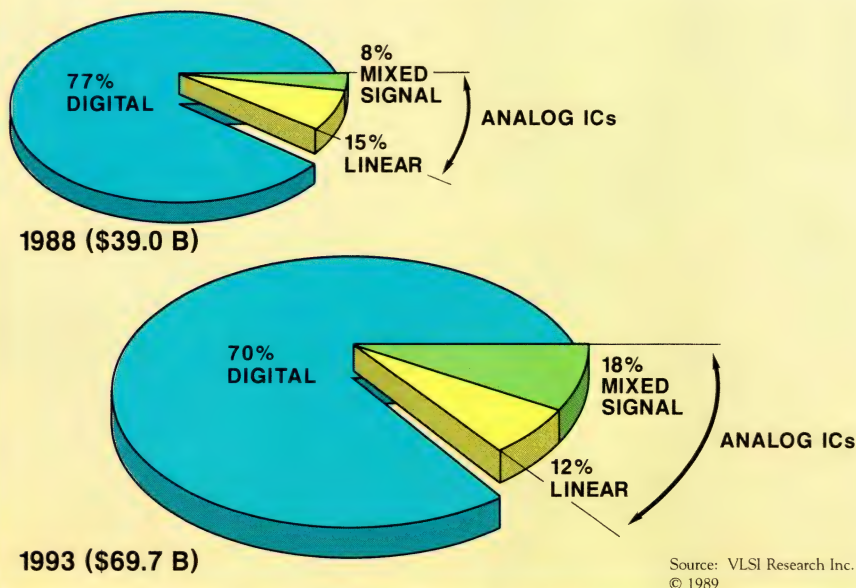

Helping you implement your designs in a changing world.

An increasing share of the total analog market is being captured by mixed-signal devices. As they gain more widespread acceptance, they are driving the expansion of the overall analog market (see above).

Changes such as this are the order of the day in the IC marketplace. Texas Instruments continues to provide not only the high-performance circuits you need but also the depth of experience, support, and service fundamental to successful completion of your designs.

Experience: Building on three decades in ICs

We at TI can successfully meet your requirements for mixed-signal devices because we have acquired the necessary knowledge from 30 years of experience in developing both analog and digital functions. We have also drawn upon our digital ASIC strengths in developing our LinASIC capabilities.

Support: Speeding our chips to you

The faster we move new products through our design cycles, the faster you can get through yours.

We employ a wide variety of design-automation tools and sophisticated software to speed our development process.

Service: Providing a surety of supply

However advanced our circuits may be, they are of little value if they are inaccessible to you. TI operates on the principle of global coverage, local service. We manufacture semiconductors in 13 countries and operate support centers in 22. We have product and applications specialists, designers, and technicians around the world. They are linked by one of the world's largest privately owned communications networks so that we can bring you our best — circuits and support — from wherever they may be to wherever you are.

Keeping our communications open

The relationship between you as customer and us as vendor is vital: You are our chief source for firsthand information that can help guide us in developing the circuits you will need for your future designs. We at TI welcome your comments and your suggestions.

TI's Leadership Analog Processing Technologies

LinBiCMOS — Combines Advanced LinCMOS, digital ASIC CMOS, and up to 30-V bipolar technologies to allow the integration of digital and analog standard cells and handcrafted analog components on a monolithic chip.

LinEPIC — One-micron CMOS double-level metal, double-level polysilicon technology, which adds highly integrated, high-speed analog devices to the high-performance digital EPIC process.

Advanced LinCMOS — An N-well, silicon-gate, double-level polysilicon process featuring improved resistor and capacitor structures and having three-micron minimum feature sizes.

Power BIFDET — Merges standard linear bipolar, CMOS, and DMOS processes and allows integration of digital control circuitry and high-power outputs on one chip. Primarily used for circuits handling more than 100 V at currents up to 10 A.

Multi-EPI Bipolar — A very cost-effective technology that utilizes multiple epitaxial layers instead of multiple diffusion steps to reduce mask steps by more than 40%. Used to produce intelligent power devices that can handle loads as high as 20 A and voltages in excess of 100 V.

Excalibur — A true, single-level poly, single-level metal, junction-isolated, complementary bipolar process developed for high-speed, high-precision analog circuits providing the most stable op amp performance available today.

If you would like a more detailed explanation of our Advanced Linear process technologies, please call. **In Asia:** Japan 81-3-769-8700; Singapore 65-251-9818; Hong Kong 852-735-1223; Australia 61-2-887-1122. **In Europe:** Deutschland (08161) 800; Italia (039) 63221; France (1) 30 70 10 03; United Kingdom (0234) 223000. Ask for a copy of our *Advanced Linear Circuits* brochure.

End the connector compromise...

1. 1-700 LOW INSERTION FORCE CONTACTS

2. QUALIFIED TO D55302

3. SIGNAL TO 500 AMP POWER CONTACT RATINGS

...in PC-board connections.


Only Hypertronics ends the compromise in printed circuit board connectors for electronic equipment . . . by replacing unreliable connections, and their field service problems, with Low Insertion Force (LIF) high-cycle reliability. Discrete Hypertac® contacts and multi-pin connectors eliminate the need for expensive and space-consuming jacking and camming mechanisms.

The unique wiping action of each Hypertronics connector maintains electrical continuity under extremes of shock and vibration (tested to 2 nanoseconds) with insertion forces as low as 1/2 oz.

Now you can have it all . . . in signal/power connections requiring up to 700 contacts. End the connector compromise by calling 1-800-225-9228, toll free.



KA Series: 17-490 Contacts with D55302-Listed Qualified Models.

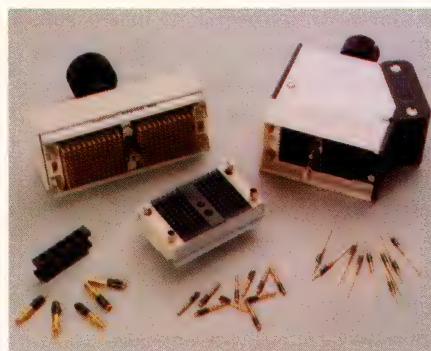

N Series: 70-700 Position Connectors with Ratings to 9 Amps.




KG Series: 22-90 Position Board Stacking for .240 or .480 Heights Between Boards.



Y Series: 3-500 Amp Discrete Pins and Mating Sockets.

HYPERTAC®: Inserting pin into hyperboloid sleeve.

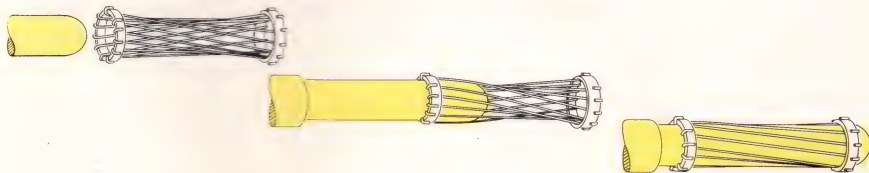

HYPERTRONICS CORPORATION

"New Horizons in Connectors"

16 Brent Drive, Hudson, MA 01749 (508) 568-0451 FAX (508) 568-0680

Controller combines multiprotocol serial communications with μ P

The Z80181 Smart Access Controller (SAC) combines the features of three ICs with additional I/O ports. The resulting collage is an intelligent peripheral controller suitable for stand-alone operation or as an auxiliary communications processor.

The core elements of the device are a 10-MHz Z180 μ P, a Z84C30 quad counter/timer, and one channel of a Z85C30 serial communications controller. The combination retains software compatibility with all three. In addition to the core, the device has two general-purpose 8-bit parallel ports, two software-controlled chip-select signals, and a clock oscillator.

The Z180 μ P, a derivative of the Z80, augments the Z80 instruction set by seven, including a multiply instruction. Built into the μ P are two asynchronous receiver/transmitters (UARTs), a clocked serial I/O port, two 16-bit timers, two DMA channels, and a programmable dynamic-RAM refresh circuit. The UARTs include baud-rate generators and modem control signals. An on-chip memory-management unit extends the Z180's address space to 1M byte, and a programmable wait-state generator simplifies your use of slow memory.

The Z84C30 counter/timer section offers four 8-bit timers. Each has an 8-bit prescaler to extend the timer's count resolution as well as its own clock input and timeout output lines. The timers share I/O pins with one of the parallel ports. Selecting the timer's I/O overrides the parallel port.

The Z85C30 serial communications controller channel handles both synchronous and asynchronous communications protocols. Sup-



Combining the equivalent of several LSI devices, the Z80181 handles a variety of serial-communications tasks.

ported protocols include bit- and byte-oriented synchronous and HDLC (high-level data link control). The device can handle data rates to 2.5M bps.

The parallel ports are bidirectional, and each I/O pin's direction is individually programmable. Port 1, which shares I/O pins with the timers, offers Schmitt-trigger input lines.

Two chip-select signals are available to simplify connection to external memory, one for RAM and one for ROM. Each signal asserts when the μ P's address falls within a programmable range of 4k-byte blocks. You specify an upper and a lower boundary for RAM and an upper boundary for ROM; the lower boundary for ROM is fixed at 00000x. The ROM chip-select takes priority over the RAM chip-select if the ranges overlap, preventing the RAM chip-select signal from asserting.

With so many peripheral func-

tions internal to a device, software debugging could be a real challenge. To assist your debugging efforts, the device offers a ROM-emulation mode. You can program the device to drive its data lines when reading from the on-chip peripheral registers, allowing a ROM emulator or logic analyzer to monitor internal transactions. In normal operation, the device's data lines would exhibit high impedance during internal activity.

The device operates at 10 MHz using either an external clock signal or a 20-MHz crystal. Both the serial communications controller and the clock/timer section connect internally to the system clock. The device comes in a 100-pin quad flatpack and costs \$22.00 (1000).


—Richard A Quinnell

Zilog Inc, 210 Hacienda Ave, Campbell, CA 95008. Phone (408) 370-8000. FAX (408) 370-8027.

Circle No. 733



The Standard for Circuit Simulation

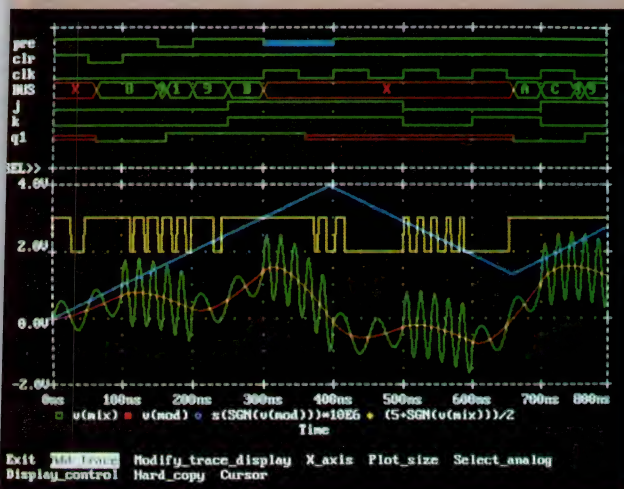

Analog and digital waveforms
with common time axis

MicroSim is the leader in Mixed Analog/Digital Simulation Technology

Two years ago, MicroSim introduced the technology for simulating mixed analog/digital circuits. Now, this capability is available in the Digital Simulation extension for PSpice. It does true mixed-mode simulation of circuits – including feedback loops between analog and digital sections.

PSpice's Digital Simulation option performs mixed analog and digital simulations. There are no performance compromises—digital components are processed at logic simulation speeds and analog waveforms are calculated with PSpice's usual precision. Analog and digital waveforms may be displayed together, with a common time axis (see photograph for an example).

Digital Simulation removes one of the greatest constraints on circuit simulation: the dichotomy between analog and digital.

PSpice with the Digital Simulation option:

- **Is Easy to Use** – In the circuit description, digital devices follow the same syntax as other PSpice devices. Simulating a mixed circuit is no different from running a transient analysis on an analog circuit.
- **Has Efficient Algorithms**—To get reasonable speed—and to allow reasonably large sections of digital circuitry—the core of the Digital Simulation option is an event-driven logic processing algorithm. It computes logic states and propagation delays very quickly.
- **Includes an Extensive Library** – The Digital Simulation option includes libraries for most TTL components. These include gates, flip-flops, latches, registers, and counters. Each component, in turn, includes models for many logic families including TTL, LS, ALS, H, F, L, S, AS, HC, HCT, and 4000 series CMOS. The component models describe not only the functionality of the device but also all its propagation delays.

Each copy of PSpice comes with our extensive product support. Our technical staff has over 100 years of experience of CAD/CAE, and our software is supported by the engineers who wrote it.

For further information about the Digital Simulation option or any other PSpice product, please call us **toll free** at (800) 826-8603 or, in California, (714) 770-3022. Find out for yourself why PSpice has sold more programs than all other SPICE-type programs combined and has become the de facto standard for circuit simulation.

20 Fairbanks • Irvine, CA 92718 USA • Telex 265154 SPICE UR

Four-channel arbitrary waveform generator samples at 2 MHz with 16-bit precision

The 4-channel Model 2201A arbitrary waveform generator includes three phase-coherent channels and a channel for a built-in noise generator. The unit can generate standard waveforms such as sine, triangular, and square waves and samples at 2 MHz; it features 16-bit precision. You can create waveforms with a mouse or from front-panel controls for the three phase-coherent channels.

The generator has 64k words of battery-backed static RAM for each of the three main output channels. You can program the phase difference between the three outputs with a resolution of 0.0055° . To create complex waveforms, you can set up the instrument to sum the output of channel 1 with channels 2 and 3. You can also concatenate the three outputs to produce waveforms with as many as 196,608 points.

The pseudorandom noise channel generates a signal with 150-kHz maximum bandwidth, and provides a noise sequence length of greater than one billion counts. The noise source features a maximum amplitude of 2.58V rms and a dynamic range of > -80 dB. You can set the instrument to output the noise signal or to superimpose it in the channel 1 output.

The unit supports waveform editing and creation in three ways. You can use front-panel controls to modify amplitudes of signal vertexes, and place and move vertexes. You can use a mouse, included with the instrument, to create and edit waveforms. The instrument supports editing functions such as move, normalize, truncate, resize,



Mouse- and front-panel-based waveform editing capabilities allow you to create complex waveforms for the Model 2201A without the help of an external computer. You can store the waveforms in removable credit-card-size memory modules that include 32k bytes of battery-backed static RAM.

extend, shrink, zoom, and pin with the mouse. You need an external monitor or oscilloscope to perform waveform editing from the front panel or with the mouse. Finally, you can use software to create waveforms on an IBM-compatible personal computer and download the waveforms to the 2201A.

You can store waveforms in the static-RAM arrays dedicated to each channel. The unit includes an interface to credit-card-size, removable static-RAM memory modules. The modules feature 32k bytes of memory and a battery that makes them nonvolatile. You can use the cards to store libraries of waveforms. If you have sufficient volume requirements to support the programming process, you can also buy the modules with ROM.

Specs for channels 1, 2, and 3 include a horizontal and vertical resolution of 65,536 points. The unit features 10V p-p, square-wave rise and fall times of <150 nsec tested with 50Ω termination. You can also selectively apply a built-in analog 700-kHz, ninth-order Butterworth lowpass filter to the output.

The Model 2201A provides both IEEE-488 and RS-232C interfaces as standard features. The tabletop unit weighs 32 lbs and measures $17 \times 5\frac{1}{4} \times 16$ in.; it can also be rackmounted. The unit, including the mouse and one memory card, costs \$9985.—**Maury Wright**

Pragmatic Instruments Inc, 7313 Carroll Rd, San Diego, CA 92121. Phone (619) 271-6770. FAX (619) 271-9567.

Circle No. 735

Analog Devices
delivers mixed-
signal technology
that meets today's
most demanding
specifications.



Faster.





ADSP-2101 – Talk about fast – this DSP microcomputer executes a 1024-point FFT in only 2.26 ms. That's faster than other DSPs that operate at almost twice the clock rate. And since our entire ADSP-2100 family is code compatible, your code will run fast on all of our DSPs.



AD9617 – The fastest slewing and settling op amp around slews at 1400 V/ μ s and settles to 0.02% in just 14 ns. And with a closed loop bandwidth of 200 MHz and harmonic distortion at 20 MHz of -59 dBc (max), it makes driving A/D converters easier than ever.



AD9712 – The only 12-bit, 100 MHz D/A converter on the market. Ideal for high-speed video and direct digital synthesis, its low glitch and low harmonics combine to deliver a spectrally pure output waveform.




AD9060 & AD671 – The fastest 10-bit and 12-bit monolithic A/D converters, respectively. The AD9060 guarantees encode rates up to 75 MSPS for unparalleled dynamic performance. The AD671 is twice as fast as any other 12-bit monolithic, converting in under 0.5 μ s, thanks to our high-speed mixed-signal ABCMOS process.

Our Spectrum CAD Tool is 100 times faster than traditional SPICE programs, so it makes quick work of mixed-signal ASIC design cycle time.



Perfect on-time delivery – it's our goal and at 97% we're getting close, thanks to our continuous improvement process based on Total Quality Management. Over 150 TQM teams make the customer and quality improvement the focus of our entire organization. A focus that gets translated into not just catchy slogans, but real action.

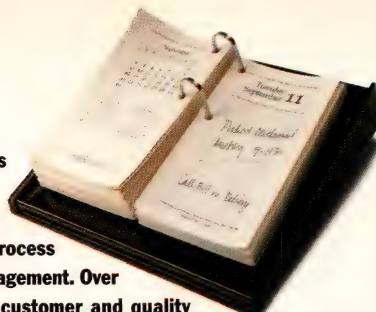

Tap into 25 years of experience at our high-speed and mixed-signal design seminars. You'll learn new techniques that'll get your applications to work more quickly, and you'll get design manuals that put all this information right at your fingertips.



In the disk drive market, you've got to be fast – in both performance and time-to-market. That's why seven of the top 10 disk manufacturers rely on Analog Devices for mixed-signal components.



Our high-speed D/A converters will have eavesdroppers hopping mad. In direct digital synthesis applications, they allow communications receivers to hop frequencies 100 times faster than traditional analog techniques.



Faster development time means faster time-to-market. And that's what you get



with our EZ-KIT, a complete design tool with a demonstration/evaluation board, DSP textbooks, and powerful, yet easy-to-use software.


Today, Analog Devices offers more high-performance mixed-signal components than anyone else. And we get them to you fast. So if you want mixed-signal ICs that'll help you design faster performing products, from a company that'll help you get your product to market faster, call us at 1-800-262-5643.



Better.




AD820/AD840 Series—If you're looking for the best in high-speed op amps, here they are—a whole family of components with the right combination of features to deliver high speed, precision, low noise, low input bias currents, low offset voltage and low drift performance. Our Complementary Bipolar process delivers gain-bandwidth products in excess of 750 MHz and slew rates in excess of 2000 V/ μ s.



ADV7141—Our new Continuous Edge Graphics RAM-DAC gives users of standard low-end color monitors better graphics on their PCs. Graphics that are virtually the same as those produced on expensive engineering and scientific workstations. It does this by eliminating jagged edges, providing photo-realistic colors and shading, and displaying text comparable to a 300-dpi laser printer.



ADSP-2111—Better integration on the best architecture in the industry. Adds an 8/16-bit host port to the two serial ports, timer, hardware companding and memory already on the ADSP-2101. And like all our DSPs, it's got fast, flexible arithmetic, wide dynamic range and a single cycle fetch of two operands (on- or off-chip). Plus it's code-compatible with the rest of our DSP family, so what's written today will be useful tomorrow.




AD75028—This custom ASIC passes the test for a top automatic test equipment manufacturer. Serving the function of 21 separate 12- and 8-bit D/A converters and providing on-chip static RAM, it also has seven channels of level setting (other monolithics only have four), and can automatically remove gain and offset errors.



We're your best source for linear, digital and mixed-signal information. Annually, we publish over 20 books and newsletters, and scores of applications notes. And our *Analog Dialogue* enjoys a worldwide readership of over 100,000 design engineers.

'Try, try again' is a costly way for manufacturers to find the best design solution. So to help our customers find answers to tricky problems the first time

around, technical application engineers are just a phone call away. In some instances, they're even located right on the customer's premises.

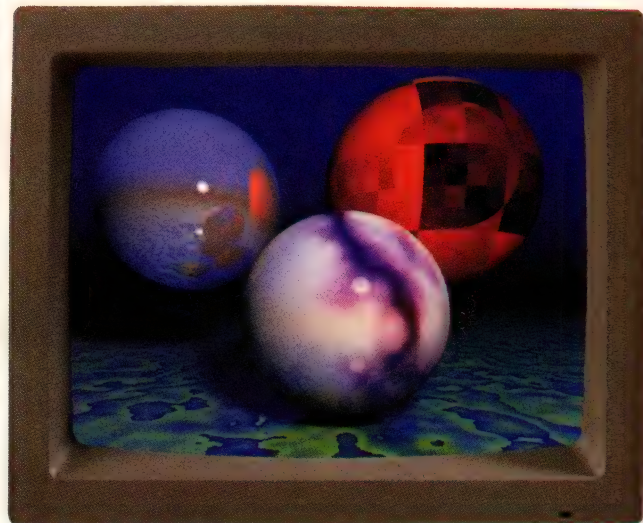


Picture this—a PC monitor that offers the same color and clarity as a high-end engineering workstation costing as much as 20 times more. Our pin-compatible RAM-DAC is literally redefining the low end of the PC monitor market.



After analyzing semiconductor suppliers, many of the leading oscilloscope and spectrum analyzer manufacturers chose Analog Devices for their mixed-signal components. One reason is our ability to deliver high performance at high levels of integration—for example, our AD640, which replaces a chain of discrete log-amps for higher accuracy.



With our motion control ICs, several major aircraft companies are staying right on course. High reliability and accuracy are hallmarks of our 2S80, AD598 and the rest of our nearly 400 defense-qualified products.

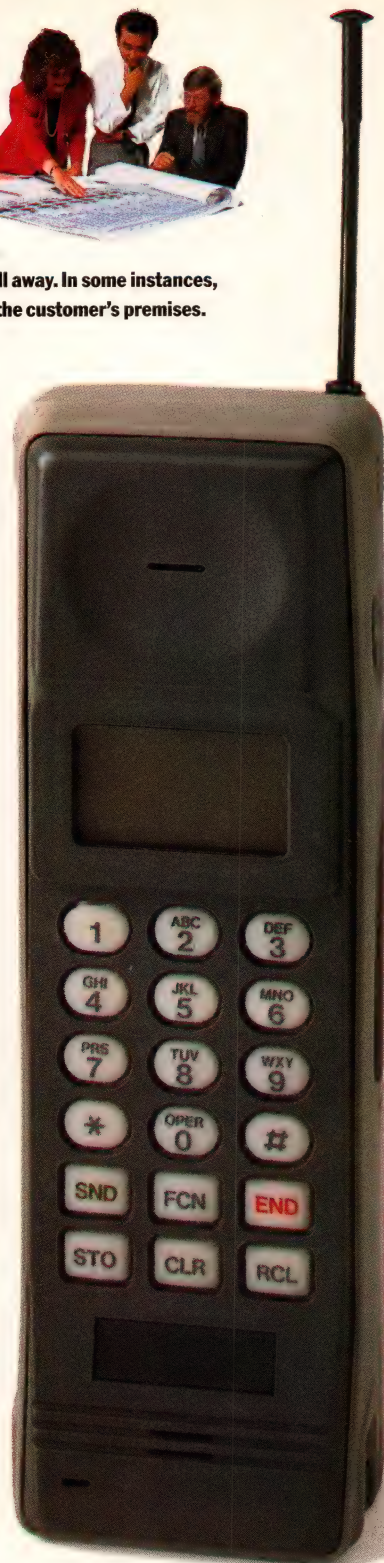

People are hearing a lot better, thanks to our fully integrated baseband processing subsystem, which controls, conditions and converts I and Q channels in both the data transmit and receive paths.

Today, Analog Devices offers a better line of high-performance mixed-signal components than anyone else. And no one has a better record for reliability, or more experience in analog, DSP and mixed-signal ICs. If you want mixed-signal components that'll help you design better products, the best thing to do is to call us at 1-800-262-5643.




Cheaper.



ADSP-2105—High performance DSP at an incredibly low price. So low, in fact, you can now consider DSP in a host of new applications. And since it's pin-compatible with the ADSP-2101, and code-compatible with all of our other DSP processors, upgrading is easy and inexpensive.



AD712—If you're working in professional audio and compact disc applications, you'll like the sound of this—an IC that combines two high-performance op amps in one compact package. You get low offset voltage and low input bias currents coupled with superb transient response, ambience, clarity and dynamic range.



SOUNDPORT DACs—We've made these DACs cost-efficient by making them complete with output amplifier, reference and digital logic interface. Perfect for high-fidelity digital audio and multimedia applications, these mixed-signal ICs achieve SNRs as high as 108 dB and THDs as low as 0.0025%.



AD22001—One way to make a car less expensive is to make it with less parts. This component replaces a whole board of discrete analog and digital circuitry. It continuously monitors up to five automotive bulbs or indicators, along with the associated in-line fuse, and provides a digital status output.



More gadgets for less money, and make it work better—that's the only way to survive in consumer electronics, the most competitive market there is. That's why three of the top five Japanese electronics firms rely on us to meet their mixed-signal needs in applications ranging from CD players to video cameras.



We've got the phone lines buzzing. Via our CMOS and Bipolar processes, we're helping modem makers turn out products that cost less yet perform better. We got the call because we have the broadest portfolio of process technology for signal processing. A portfolio that includes not only CMOS and Bipolar, but BiCMOS, Complementary Bipolar, Flash and many others.




We're far from your local component boutique. Over half of our \$540 million in revenues comes from international sales. And with manufacturing and stocking facilities on just about every continent, getting products to you quickly is a snap. Plus multiple manufacturing facilities allow us to take advantage of the right talent and processes for the job at hand.

Automakers certainly understand that manufacturing efficiency is a critical key to lowering production costs. That's why we've developed high-performance ICs for several car companies around the world, as well as companies making DAT equipment, disk drives, digital mobile phones, modems, and HDTV.




With billions of dollars in annual sales at stake, the video game market is anything but child's play. One leader in this market found that with our DSP they could create more realistic and interactive games. As a result, they're driving away with a bigger share of the market.

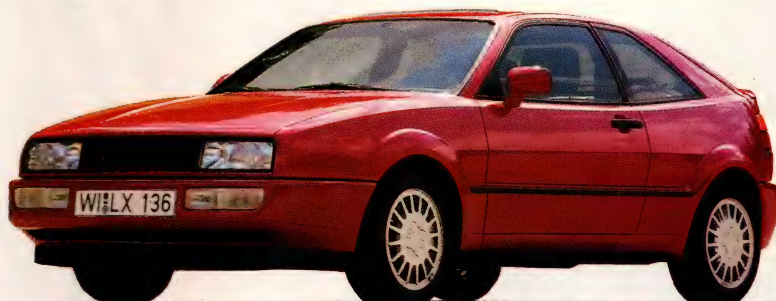

Today, Analog Devices offers more cost-effective solutions to your high-performance mixed-signal needs than anyone else. Solutions that are surprisingly affordable, whether they're available off the shelf or developed for a specific application. To find out more about how we can help you develop products more efficiently, or for a free copy of our recent Mixed-Signal Technology white paper, call us at 1-800-262-5643.




Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106. Headquarters: (617) 329-4700. Offices and applications support available worldwide.

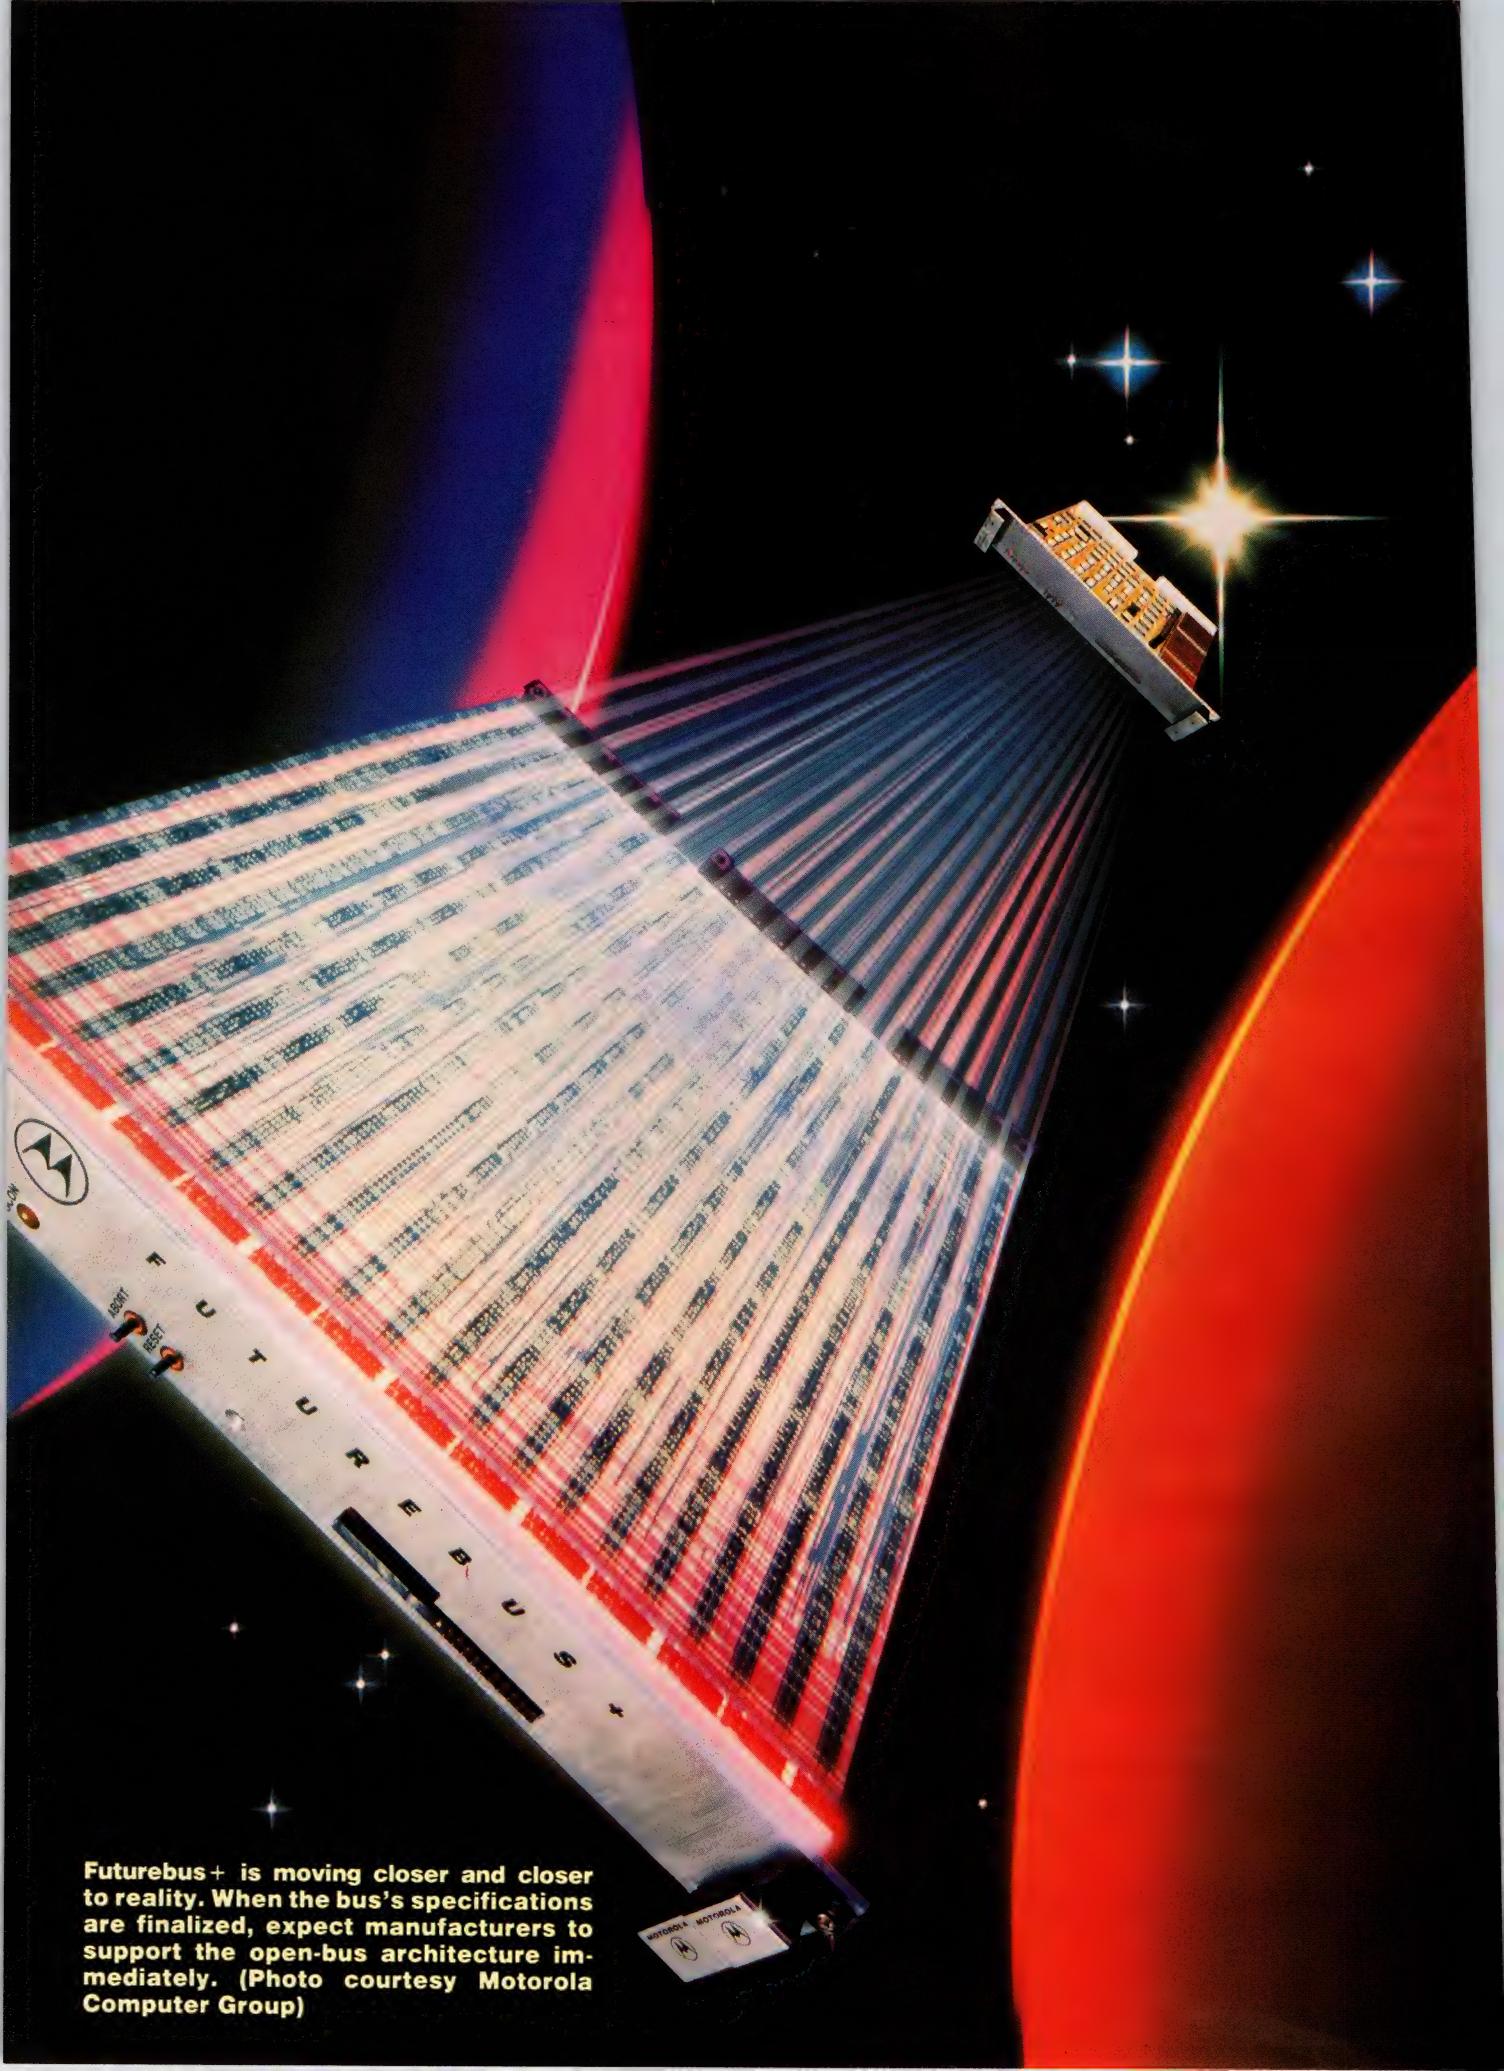

Futurebus+ is moving closer and closer to reality. When the bus's specifications are finalized, expect manufacturers to support the open-bus architecture immediately. (Photo courtesy Motorola Computer Group)

Futurebus

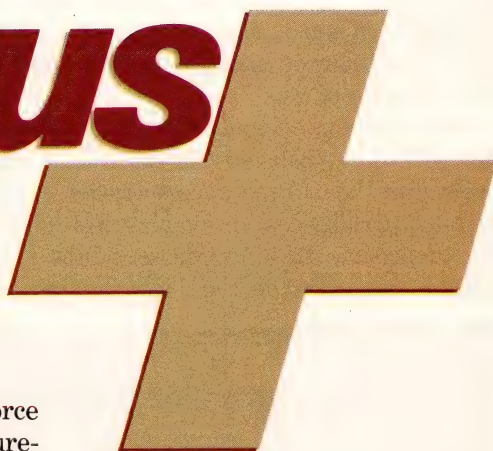

Commercial implementations of the Futurebus+ are still probably a year away, yet the release of draft copies of the Futurebus+ documents has created considerable interest in this advanced, open-bus architecture. At last February's Buscon/90-West Conference in Long Beach, CA, the IEEE P896 committee, better known as the Futurebus committee, rolled out a series of documents for IEEE membership approval. The most notable of these documents are P896.1 and P896.2. P896.1 defines Futurebus+'s logical-layer specifications, bus-line definitions, bus-arbitration methods, the parallel protocol for data transactions, control and status registers for bus management, cache coherency, and message passing. Document P896.2 defines Futurebus+'s hardware physical layer and profile specifications.

The documents reflect the committee's multiyear effort to arrive at an open-bus standard that will support multiple generations of μ Ps and technologies without becoming obsolete (see **box**, "The long history of Futurebus+"). The bus has already been endorsed by the US Navy for mission-critical computers, and a large number of companies, including DEC, Sun Microsys-

tems, Unisys, Motorola, and Force Computers, are developing Futurebus+ products pending the finalization of the specifications.

Futurebus+ is an evolved version of many earlier buses that has added features that supposedly make it independent of changing technologies. For example, the specification allows modules with big endian or little endian data representations to communicate with each other. These representations reflect the different byte-ordering conventions for μ Ps from different vendors. The specification forces bytes to be swapped before a transaction is possible.

A little endian representation reserves the least significant address byte of a register for the least significant data byte of a word; the big endian representation reserves the most significant address byte of a register for the least significant data byte of a word. For the module to automatically swap or order the bytes during a transaction, each module on the Futurebus+ must contain a bit in a status register that indicates whether the module uses a big or little endian representation.

Another feature of the bus is global addressing. Each logical bus module on the Futurebus+ gets assigned a unique geographical ad-

John A. Gallant,
Associate Editor

For some time now Futurebus+ touters have said that the architecture will lead us into the computing promised land. Though there is still work to be done, the journey may finally be ready to begin.

Each module on the Futurebus+ gets assigned a unique geographical address, which is hard-wired into each slot on the backplane.

dress, which is hard-wired into each slot of the backplane. When a board plugs into a slot it senses the 5-bit number on lines GA[4..0]* to determine which slot it resides in.

The Futurebus+ arbitration process operates in parallel with data transfers on the bus. Each module in the system has a unique arbitration number that is used in a parallel-contention algorithm during competition to become the bus master. When two or more modules compete for the bus, the module with the

largest arbitration number wins. The process has two modes of arbitration: unrestricted mode, which has 14-bit arbitration numbers; and restricted mode, which has 8-bit arbitration numbers. Because the arbitration cycle uses an 8-bit competition number, the unrestricted mode requires two arbitration cycles. The unrestricted mode provides eight priority bits, whereas the restricted mode is limited to two bits.

The module with the highest arbitration number at the end of arbitration competition becomes the master-

The long history of Futurebus+

The history of Futurebus+'s development follows a meandering course. It started with the IEEE's recognition of the P896 committee in 1979. The committee was set up to arrive at a bus standard that would accommodate new 32-bit processors such as Motorola's 68000 μ P, which has a 16-bit data path and a 32-bit register set that requires a 32-bit backplane. The committee's efforts produced the Versabus, which became the basis for the VMEbus. After a few years of evaluation, the committee set a new goal—to develop a "processor-independent 32-bit bus" to handle all future μ P systems. In 1982, the group became known as the Futurebus committee.

The Futurebus required arbitration for multiple masters and fast data-transfer speeds to handle faster μ Ps. In addition, the committee realized that a Futurebus backplane was going to require cache-coherency protocols that would allow multiple processors access to global data on the bus. It also considered how to use bus repeaters between multiple buses. Although the committee didn't complete the work in these areas, it published a partial speci-

fication in 1986 known as the IEEE STD 896.1 document, which defined hardware and timing.

RISC μ Ps influence directions

Subsequently, Motorola developed the 88000 RISC μ P, which has a cache architecture and coherency protocols similar to the IEEE P896 committee's proposals. In 1988 an internal debate occurred within the VMEbus Trade Association (VITA) as to whether Futurebus could become VMEbus II to accommodate the new RISC processor. Instead of endorsing Futurebus, VITA established the Next Generation Architecture (NGA) subcommittee to investigate the future for VMEbus.

Meanwhile, the US Navy evaluated six 32-bit buses for mission-critical computers, and Futurebus came out the winner. However, because there was no industry support for Futurebus, the Navy was considering using Multibus II as an interim backplane standard until the mid 1990s. In December 1988, however, the IEEE Rugged Bus committee voted to merge with the Futurebus committee to de-

fine a highly reliable bus. This sequence of events was enough for VITA's NGA committee to adopt Futurebus as its new backplane architecture that month. The Navy then announced that it was indeed going to use Futurebus, and in February of 1989, the Multibus Manufacturers Group joined the IEEE P896 committee.

Because some members of the IEEE P896 committee are unlikely bedfellows, it's not surprising that the Futurebus generated concern over its impact on current products for the VMEbus and Multibus II. Even so, the committee members were able to define data-transfer protocols, bus widths, bus speeds, and a physical connection system. It became clear, however, that the new proposals were not consistent with the original IEEE STD 896.1 published in 1986. A complete rewriting of the specification was necessary. That new specification is known as Futurebus+. Currently, the 896.1 logical-layer specification and the 896.2 physical-layer and profile specification for Futurebus+ are in draft form awaiting IEEE members' approval.

elect and must wait until the current master is finished before becoming master and performing bus transactions. If a module with a higher priority number than the master-elect wants the bus while the master-elect is waiting to become master, it can initiate a new competition to establish a new master-elect.

The arbitration number also provides a round-robin bit and a 5-bit unique field for each module. Round-robin arbitration ensures a fair and equitable allocation of bus tenure between competing modules. Each module must record the priority level of the current bus master and set a round-robin bit when the module detects that the priority number is greater than its own. Each module clears a round-robin bit if it detects the priority number less than its own. If the priority number is the same, the bus is granted in a round-robin fashion according to the 5-bit unique number before the round-robin bit is cleared. In this manner, a module is inhibited from further arbitration competition as long as the round-robin bit is cleared.


When a master completes a transaction and no modules are requesting the bus, the master changes its status to parked, placing the bus in an idle state. To decrease the latency of arbitration when the bus is idle, a single competitor for the bus can immediately gain tenure of the bus by using the idle bus-arbitration mode.

Data paths come in many flavors

Futurebus+ is an architecture that is scalable in many dimensions. One such dimension is the data-path width. Futurebus+ is basically a 64-bit data and address bus that employs a standard 64-bit multiplexed address/data pathway. However, it also provides for a 32-bit address/data subset pathway and a 128-bit or 256-bit data pathway. Futurebus+ is also scalable to accommodate dual or multiple parallel Futurebuses. Futurebus+ provides for locking mechanisms and cache-coherency mechanisms that allow several Futurebus+ chassis to be linked through cache repeaters.

Futurebus+ uses a compelled parallel protocol to transfer data between devices. The protocol requires a compelled reaction (an acknowledgment) either from the receiving device on each data transfer or at the end of a packet of data transfers between two modules. In a split-transaction mode, a module on the bus sends an address to another module, indicating that it wishes to transfer data. The module then relinquishes the bus until data transfer is possible.

The data transfer is completely asynchronous, which

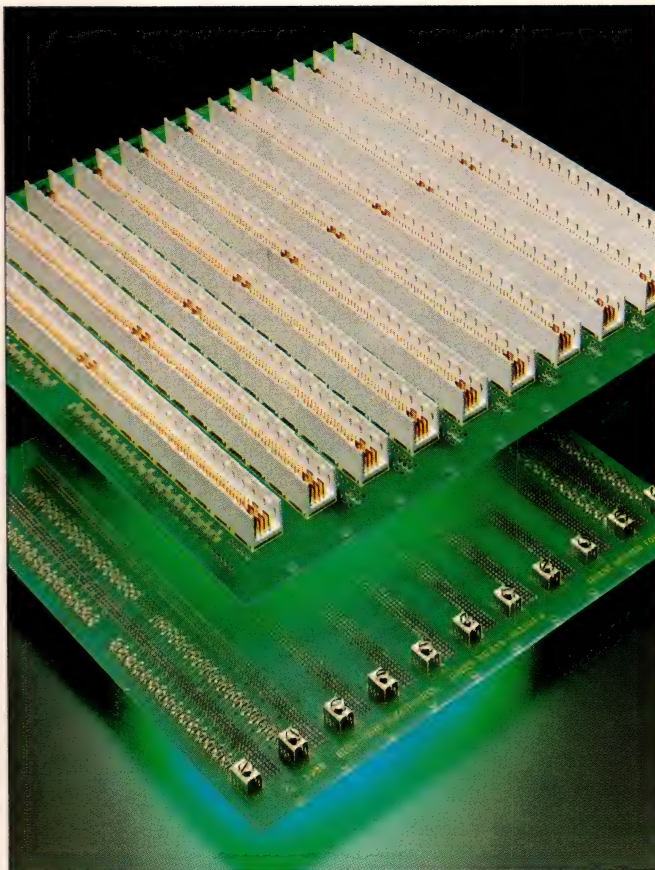

Backplanes that don't conform to hard metric dimensions may become obsolete.) However, this prototype from Bicc-Vero, which conforms to P896.2, is available for developing products for experimentation and test.

means that, as opposed to synchronous buses, the bus data-transfer rate is not locked into a specific clock frequency. Instead of issuing some initial control signals indicating that a master wishes to place information on the bus, the master places the information on the bus first. The bus transaction then takes place in three phases: a connection phase, which establishes the type of transaction with the desired slave; an optional data-transfer phase for transferring data; and a disconnection phase, which terminates the transaction and disconnects the slave.

Modules dance to the same tune

The participants in a packet-transfer transaction must all operate at the same rate. Before a transaction can occur, each module reads the transfer rates that each module in the system can support. The modules then set a transmit speed equal to the slowest speed

The data transfer is completely asynchronous, which means the bus data-transfer rate is not locked into a specific clock frequency.

a module on the bus can operate at and still accept a packet. The modules also set the fastest transmit speed that allows a module on the bus to accept a packet. The modules then negotiate a speed for a transaction during the connection phase. The master also sets the packet length, which can be as many as 64 data transfers.

Each transaction phase uses a succession of bus beats to synchronize the master with the slave. A typical bus beat for a single slave transaction that requires a compelled response begins when a master issues address and control information to a slave. To assure that the lines are valid before asserting a high-to-low transition on a master synchronization signal, the master waits for the skew time of its own information lines to settle. The slave detects the synchronization signal and waits for the skew of its own receivers. The slave captures the information and activates the appropriate information lines back to the transmitter. After the slave waits for its information lines to settle, it asserts a low-to-high transition on a slave-synchronization line, which the transmitter acknowledges by issuing a third line handshake back to the slave.

This bus-beat handshake ensures the technological independence of each module on the Futurebus+ because each module need only account for its own skew on the information lines and its own timing requirements. When the packet mode is invoked, the data from the master to the slave occurs in packets of data before the slave is required to activate the slave-synchronization signal.

Many slaves have unique address ranges, but some




Many Futurebus+ products are still under development. This wire-wrapped backplane from Augat will not be released until there is final IEEE approval of the standard.

may share areas of the same physical space. When a master accesses an address in one of these spaces, all of the slaves must activate a high-to-low transition on the slave-synchronization line because the line is wire-ORed. The slowest slave controls the release time for the broadcast transaction. A participating slave may induce the master to use this broadcast handshake, which can be used frequently in cache-coherent, shared-memory systems. When a cache detects that data is being transferred on the bus, the cache induces a broadcast handshake and reads the data, an operation known as snarfing.

Another mode of data transfer on Futurebus+ is split transactions, which allow modules with long data latencies to use the bus efficiently. For example, if a requester module wishes to retrieve data from slow memory, it enters the connection phase, informing a responder module of its wish. The requester then generates a disconnection phase and sends a 16-bit global identifier to the slave. When the responder's latency time expires, the slave negotiates for the bus to become a master and sends the data to the requester using the identifier. In this manner, the bus is free for other transactions while a responding module is gathering the data.

The Futurebus cache-coherency protocol permits as many as 32 processors to share memory on the bus. To reduce bus traffic, the Futurebus+ committee has adopted a copyback cache system instead of a write-through system. Some earlier bus architectures, such

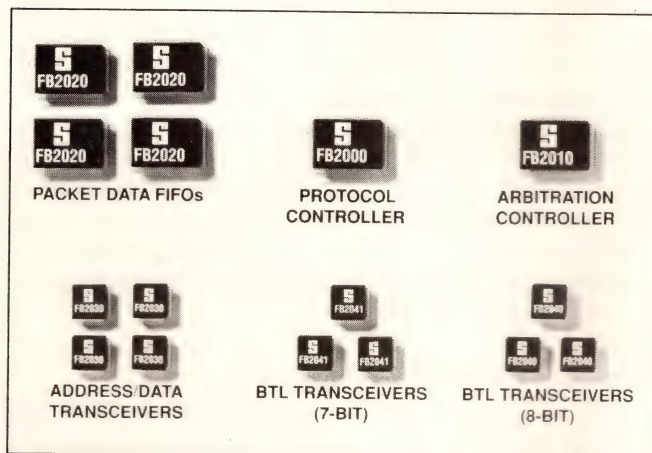

The first step in getting a new bus architecture off the specification sheet is silicon support. Philips/Signetics plans to develop complete Futurebus+ chip sets. The transceivers are currently available.

as the VMEbus, support a write-through cache system that writes a cache line to main memory on each write to the cache. Although this cache scheme is simple to implement, in large processor systems it can swamp the backplane with cache write commands. A copyback cache scheme permits a μ P to modify only its cache on a write command and not the main memory, thereby reducing traffic on the backplane. The Futurebus+ copyback scheme reads a 64-byte cache line from contiguous memory only when there is a read miss in the cache.

The copyback caching method requires an elaborate

cache-coherency protocol to assure that multiple caches contain the same modifications to a specific portion of shared memory. The Futurebus+ cache-coherency protocol assumes that each module on the bus can read the tags associated with each cache line for all of the onboard caches on the bus. The protocol then assigns attributes to each cache line within a cache.

Futurebus+ uses these attributes in a MESI cache mode. MESI stands for the attributes of a cache line: Modified, Exclusive, Shared, and Invalid. To ensure cache coherency, the model requires that a μ P first get permission to modify a cache line from all of the

Chip sets can make it real

If any bus is going to see the light of day, there must be silicon to support it. Currently, three vendors offer or are developing backplane drivers and logical-layer chip sets for the Futurebus+: National Semiconductor, Philips/Sigmetics, and Texas Instruments.

All of the vendors use Backplane Transceiver Logic (BTL) to maintain the projected transfer rates of the Futurebus+. The Futurebus committee expects Futurebus+ systems to perform a data transfer within 20 nsec in 1991 and within 10 nsec in 1995—independent of the width of the data pathway. Using these figures as a projection, modules using the compelled transfer mode, which requires a compelled response from a slave, will transfer 32-bit data at an approximate transfer rate of 100M bytes/sec in 1991; 256-bit systems will peak at 3.2G bytes/sec in 1995. The BTL driver was first designed by National Semiconductor to drive the low-impedance transmission paths needed to support these fast data-transmission rates.

The BTL driver reduces the capacitance of the driver by placing a Schottky diode in series with the open collector driver output. The diode resistance is typically less than 2 pF, and, allowing for 2 pF at the receiver end, the total loading can be kept under 5 pF. The BTL also uses a differential receiver, which detects 1V signals that swing about a 1.55V threshold and has resistors for impedance-matching the transmission line.

National Semiconductor is developing a number of second-generation BTL devices for the backplane. The Futurebus+ chip set includes 9-bit data transceivers that are latched and non-latched handshake receivers with glitch filtering for eliminating wire-ORed glitches on the bus. The chip set also includes arbitration receivers for supporting the arbitration protocol and an arbitration controller, which implements Futurebus+'s round-robin protocol.

Philips/Sigmetics has already released a family of chip sets for implementing the Futurebus+ backplane. The first chips avail-

able are the FB2040 8-bit BTL transceiver, the FB20417 7-bit BTL transceiver, and the FB2030 address/data transceiver. The devices are fabricated in BiCMOS and feature propagation delays of 2 to 3 nsec and an output current of $I_{OL} = 100$ mA. The company plans to release a logical-level chip set in the fourth quarter. The set will include the FB2000 protocol controller, the FB21010 arbitration controller, and the FB2020 packet data FIFO.

Texas Instruments will introduce an octal latched transceiver with parity sometime during this quarter. The BCT979 is a BiCMOS device with BTL outputs with current capability of $I_{OL} = 100$ mA. The company is also planning to offer an arbitration controller, protocol controller, and cache-coherency controller in 1991. Rumors abound that other companies are also working on chip designs. If there is a wide variety of chip sets available when the Futurebus+ specification settles, it's bound to reduce the cost of developing Futurebus+ products.

Some transactions require cooperative actions between the caches during a transaction in order to maintain coherence.

other caches that have copies of the same line. The cache does this by generating a cache transaction that indicates the global memory address of the cached value.

Futurebus+ specifies a variety of possible cache transactions that can occur on the bus, such as copy-back, invalid read, shared read, modified read, invalid write, and invalidate—all of which define specific operations for the cache model. All caches are required to snoop the bus; that is, monitor each type of transaction on the bus. Some transactions require cooperative actions between the caches to maintain coherence, a process called intervention. For example, if one cache requests a cache line from shared memory and a second cache detects that it (the second cache) contains a modified version of the line, then that second cache must intervene and transfer the modified line in place of the line in shared memory.

In addition, all transactions on the bus that can be shared can also be snarfed. To snarf data, the cache

converts the current transaction to a broadcast operation and captures the data on the bus. The broadcast operation allows the cache to obtain a shared copy of a cache line without an additional transaction. With many processors on the bus issuing transactions to both caches that have different cache-line attributes and to the shared memory, the permutation of possible bus events necessary to maintain cache coherency is large. Each cache controller requires service routines that will handle all possible combinations of events. Document P896.1 describes a number of the possible combinations.

To further complicate matters, Futurebus+ has an expansion provision that allows multiple Futurebus+ backplanes to be connected in a system. Multiple backplanes can be used in fault-tolerant applications. The backplanes connect through cache agents and memory agents that operate on a hierarchical cache-coherence protocol. The protocol allows the cache agent to snoop one of the buses and act as an observer for

Giving older buses a new lift

Whenever a new bus architecture arrives, there is talk about building bridges from it to existing architectures. The reason is simple: vendors want to preserve investments in existing product lines but still want to make use of the capabilities of the new bus. A bridge is little more than a communication scheme that allows the two buses to communicate with each other. Ideally, a bridge between the two buses should operate as if the boards for both buses are in the same backplane.

Ever since Futurebus+ started to grow in popularity, the VMEbus Trade Association (VITA) and the Multibus Manufacturers Group (MMG) have been trying to finalize specifications for bridges between Futurebus+ and either the VMEbus or Multibus. Both the VMEbus and Multibus have

maximum data-transfer rates of 40M bytes/sec for 32-bit data transfers. Bus vendors would like to take advantage of the 100M-byte/sec, 32-bit data-transfer rate of Futurebus+. At wider data paths, Futurebus+ runs even faster.

Bridge translates bus cycles


Although VITA and MMG are trying to solve the same problem, their approaches are different. The VMEbus-to-Futurebus+ bridge consists of adapter boards for each bridge. The adapter boards are connected by a ribbon cable. The adapter boards have circuitry that translates the two buses' data-transfer protocols and bus cycles. Control and data paths between the buses and a set of protocols specify the routing of data between the buses. Each path is called a channel, and

four channels are required—two data-access channels and two event channels.

A transaction example would be a write to memory across the bridge. If a module on the Futurebus+ wishes to write to memory on the VMEbus, the processor first becomes master by arbitrating for the Futurebus+. It communicates with a slave that resides on the Futurebus+'s adapter board. The slave interprets the transaction's address and passes the transaction through a bridge master to an interconnect master that communicates through the ribbon cable.

The interconnect master on the Futurebus+ adapter initiates a write cycle between the two adapter boards and passes the address, command, and data to an interconnect slave on the VMEbus adapter. The intercon-

The VMEbus to Futurebus+ bridge has adapter boards for each bus, which interconnect through a ribbon cable. The circuitry in each adapter translates commands to be comprehensible for the bus cycles in each architecture.

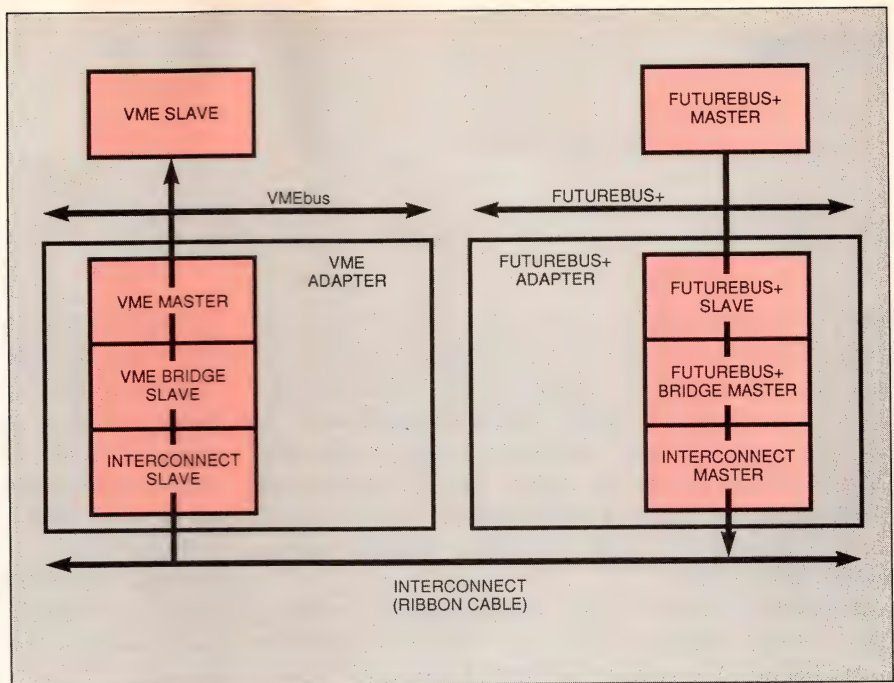

the other caches on the bus; the memory agent acts as a slave for global memory. The agents maintain a hierarchy of all the cache transactions that occur between caches and memory on the connected buses. The cache agent can split the transactions between a bus and a memory agent to eliminate latency and free the bus for other transactions. The memory agent

keeps track of all the cache lines it is responsible for in the hierarchy.

The Futurebus+ specification allows for modules to be inserted and withdrawn while the system is in operation. During live insertion, newly inserted modules must align their logic-state machines with the other modules in the system before beginning operation. A

nect slave passes the information to the bridge slave, which transforms the write command so that a VMEbus master on the VMEbus adapter board can initiate a VMEbus write cycle. The VMEbus slave writes the data into memory and passes an acknowledge line back through the adapter boards to inform the Futurebus+ processor that the transaction is complete.

Although the VMEbus is limited to 32-bit data transfers, the existence of separate data and address buses in the VME backplane makes it possible to extend the width of the address and data path to 64 bits. The 64-bit VME extension, which has been adopted by the VMEbus bridge committee, is based on the work of Performance Technology Corp (Rochester, NY). The extension takes advantage of the fact that

the VMEbus can transfer 256 bytes of data in block mode after specifying a single address on the first bus cycle.

The assumption is that all the subsequent addresses are sequential and can be determined by a counter. Because the address lines aren't used in the block-transfer mode, the 64-bit extension multiplexes 32 bits of data onto the address bus to produce a 64-bit data bus in block-transfer mode. The VMEbus bridge intends to use this feature to transfer 64-bit data between the two buses in block mode. DY-4 is teaming with Performance Technologies and Newbridge Microsystems to develop a chip set, called the Darf64, to implement the 64-bit extension.

Whereas the bridge between VMEbus and the Futurebus+ attempts to translate the data-

transfer protocols for both buses practically on a cycle-by-cycle basis, the Multibus II bridge uses a more loosely coupled approach. The MMG feels that Multibus II already has many of the features of Futurebus+, such as message passing, geographical addressing, and automatic identification. Therefore, the MMG is primarily interested in gaining access data on Futurebus+'s high-speed cache-coherent memory bus.

The data-transport system uses the ISO 7-layered communications model and treats the Multibus II backplane as a local-area network. The network layer is implemented in software. The transport layer uses file-oriented services, such as streams and pipes, between different operating systems. The transport layer allows different operating systems to exchange data.

newly inserted module monitors the reset line to see if the system is live. If it is, the module sets the reset line, indicating that the module needs time to align. All other modules must finish their transactions within 128 μ sec and end the current arbitration sequence. This procedure causes the bus to go to an idle state. After the newly inserted model detects the idle condition for 1 μ sec, it issues commands for the bus to resume operations.


Modules being withdrawn must release any signal they are asserting in such a way that other modules do not mistake the release for normal operation. Therefore, each board requires live-withdrawal circuitry, which the operator informs via a switch that he is about to remove the board. The live-withdrawal circuitry performs the necessary housekeeping needed to perform a clean module withdrawal, such as copying and storing information.

A Futurebus+ module must also provide three types of control-and-status registers: module-capability registers, module-control registers, and module-status registers. Module-capability registers contain information on the module's capabilities for packet length, data-path width, bus mastering, split transactions, and

locking commands. Other module-capability registers can select an arbitration time delay and the maximum frame size for a module that supports message passing. Module-control registers enable data in the capability registers and change control parameters that affect bus operation. Module-status registers indicate current status and error information.


Futurebus+ also provides a message-passing scheme that allows modules to send or receive messages from tasks running on other modules. Modules use predefined addresses within the control-and-status register as mailboxes to which a module can transfer a message frame. Because modules only write message frames to a mailbox, they are distinguishable from other Futurebus+ transactions. The message frame consists of a 2-byte header and a body that contains 64 bytes of frame data.

Each module has a mailbox structure that, to avoid deadlocks due to queues, contains three mailboxes. The specification defines a request mailbox and its associated queue for message frames that require an acknowledgment message to be returned to the requesting module. The module sends all acknowledgment message frames to the requesting module's response

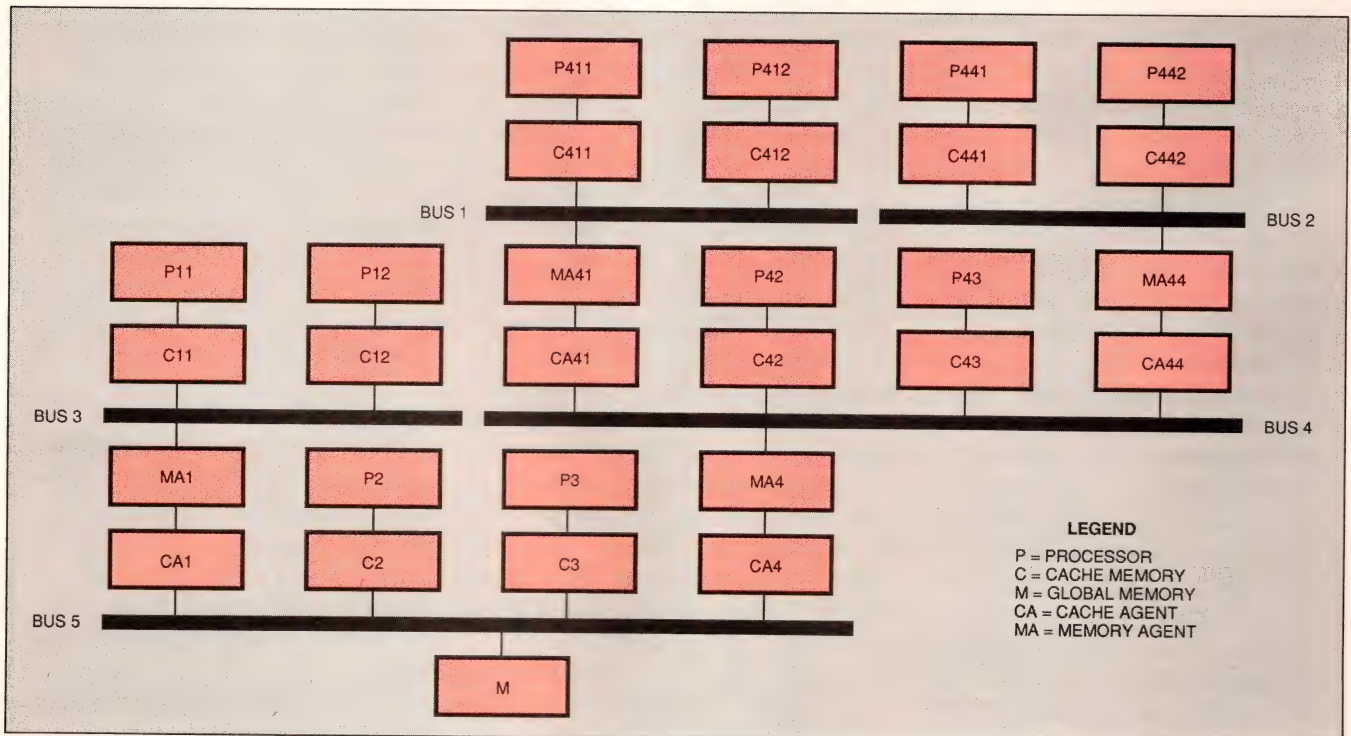

Multiple processors on multiple bus segments communicate with global memory using split transactions and cache and memory agents that implement the hierarchical cache-coherency protocols.

For Versatile VME Solutions...Turn to SBE

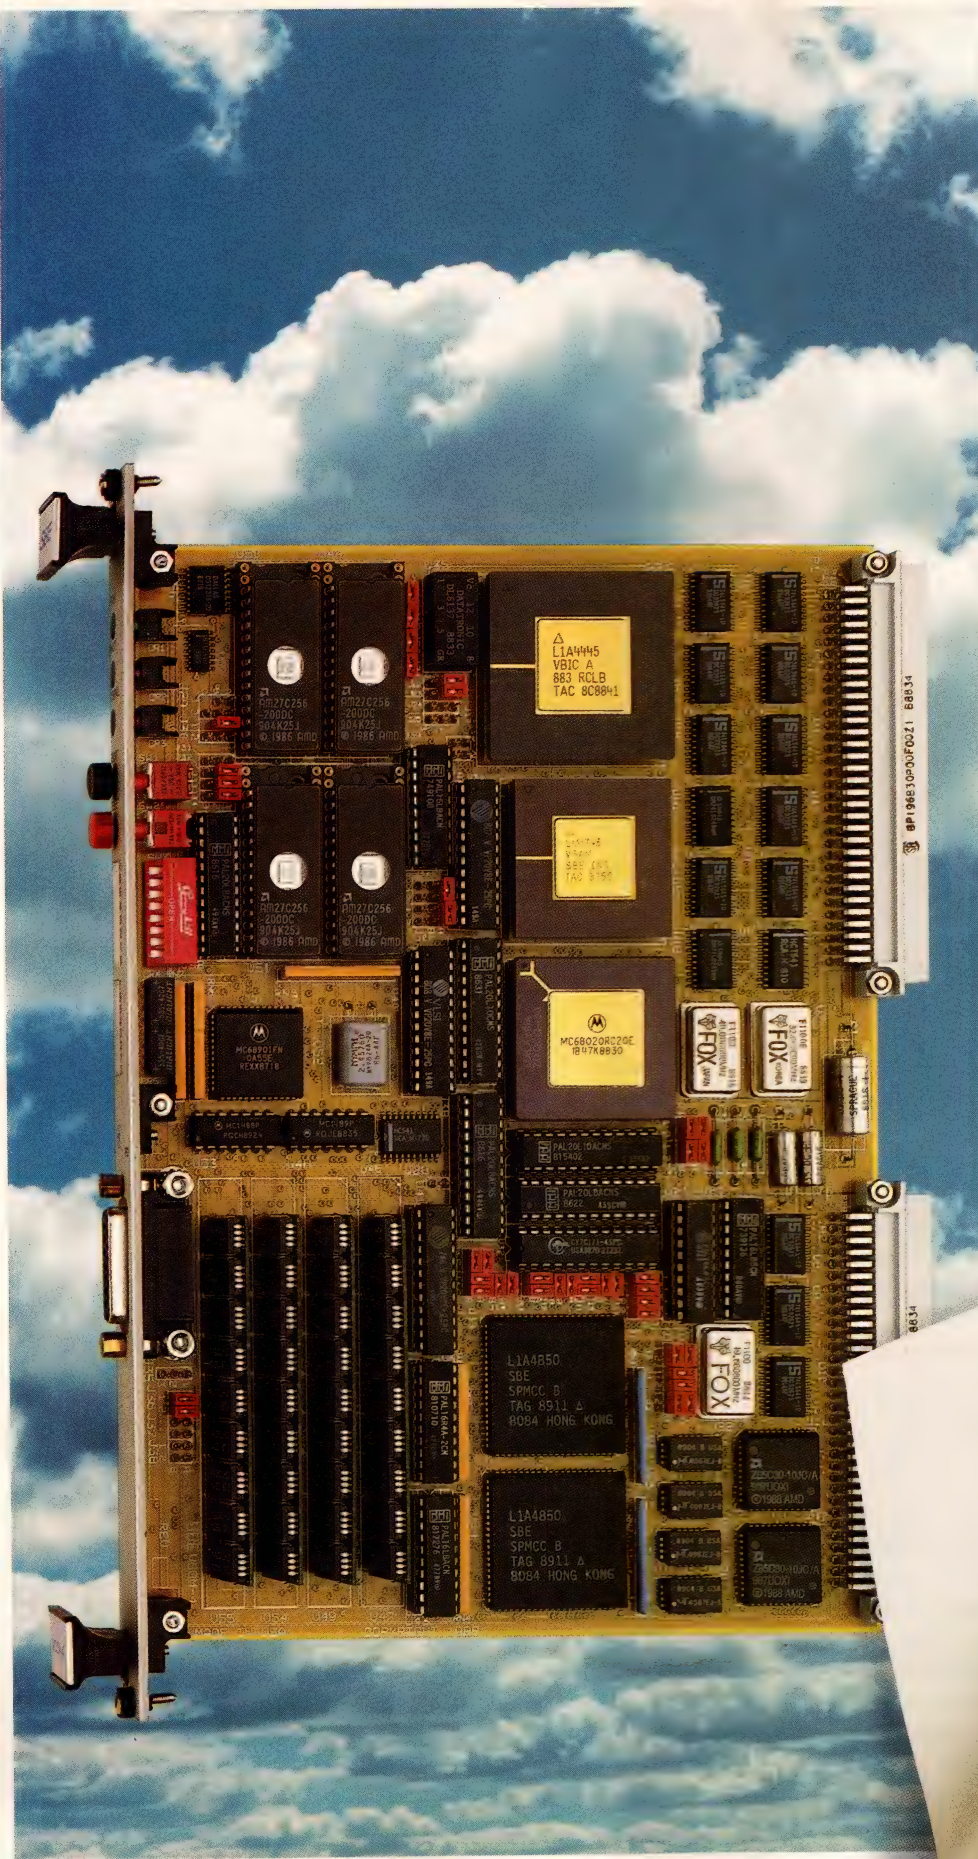

You need a wide variety of versatile VME solutions. You need the capability to customize standard configurations. You need software and support. You need SBE.

SBE's commitment to providing solutions for your OEM needs can be found in every SBE VMEbus product—VMEbus interface chips, single-board computers, high-performance communications controllers, and VMEbus systems integration solutions.

SBE VMEbus boards are designed to address a broad range of real-time data processing, control and data communications applications. All are modular, offering I/O and memory expandability. This includes the VPU-25 68020-based IndustryPack* engine with over 20 different I/O expansion modules, including D/A, latching relays, and a custom interface design kit.

And, we offer VMEbus products with a full software support program: board support packages for the popular real-time kernels, TCP/IP for the VLAN-E Ethernet LAN controller, and X.25 available on the VCOM-4 high-speed multiprotocol serial communications controller.

Plus... comprehensive documentation and prompt engineering response for your specific OEM requirements.


For over 10 years, major companies have turned to SBE for versatile solutions. You can, too. Contact SBE, Inc., 2400 Bisso Lane, Concord, CA 94520, or call 1-800-347-COMM for more information.

*IndustryPack is a trademark of Greenspring Computers, Inc.

See Us At Buscon East Booth #419

SBE
Communications &
Real-time Solutions

A functional design of a module for live insertion contains circuitry that does the housekeeping chores to assure smooth board insertion and withdrawal without interfering with bus operations.

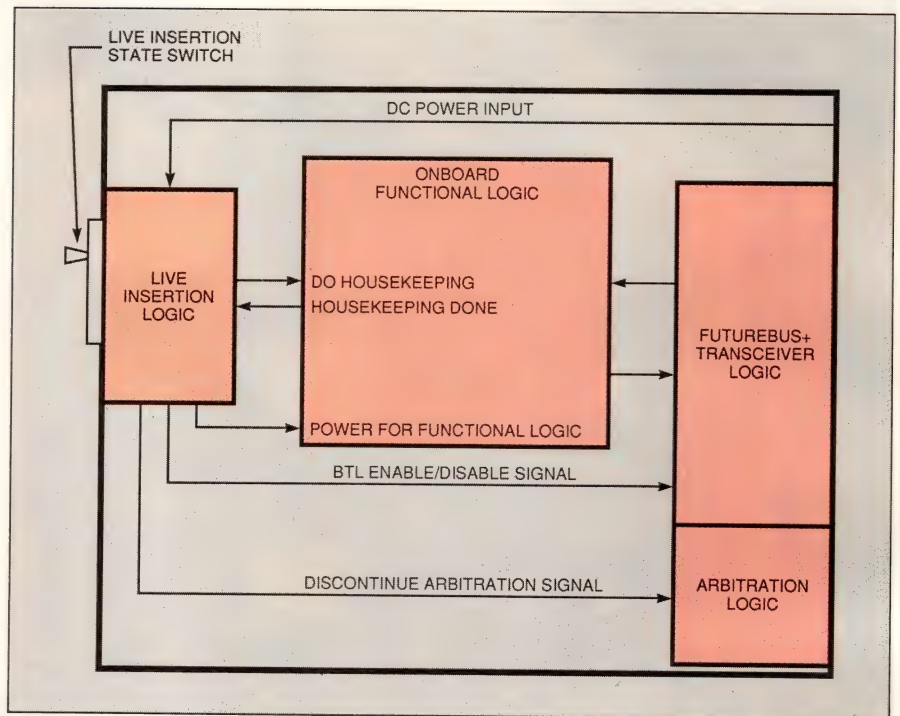

mailbox. The modules also use the response mailbox and its associated queue for message frames that don't require an acknowledgment.

The modules are not allowed to induce a broadcast mode on messages received in either the request or the response mailbox, so the specification defines a third mailbox for this purpose—the broadcast mailbox. The broadcast mailbox has an address that is common to more than one module.

In conformance to the Futurebus+ philosophy of developing a backplane that is both processor and technology independent, the specification separates the logical-layer specification from the hardware specification. Currently, the committee, in document P896.2, has identified four different hardware configurations, called profiles. However, only two of them, A and B, have been defined for mechanical form factors, power-supply and signal-pin assignments, and environmental specifications. The other two, C and D, define cable interconnections between systems and an EISA-style hardware model, respectively. The purpose of the profiles is to give users different implementations to suit their needs. Boards plugged into a common backplane are guaranteed to be electrically and mechanically interoperable.

The specifications for Profile A and Profile B are

similar: both support 32 and 64 bits of addressing. The major difference is the data-path widths. Profile A states that all backplanes must be wired to support a 64-bit data path with a default to 32 bits; Profile B defines a standard 128-bit data path, with defaults to 64 and 32 bits.


Profile B contains a subset of the logical-layer specifications of Profile A. Profile B calls for an I/O bus that is independent of the memory bus so that the Futurebus+ cache-coherency model doesn't extend to the I/O modules. Digital Equipment Corp intends to employ Profile B for I/O subsystems, which attach to a workstation through a bus bridge. The host's cache cycles do not pass through the bus bridge. Digital's intent is to have an I/O bus that, because it doesn't have to wait for cache latency times that occur on the host's memory bus, has a high throughput.

When will the standard settle?

When the specification was released in February, the consensus was to use 6U-wide (233.35-mm) Eurocards with a depth of 280 mm for Profiles A and B. However, since the draft was published there has been a strong drive within the Futurebus+ committee in favor of an all metric standard. The Eurocard is based on the hole patterns for a standard 19-in. rack, in which

PERFORMANCE

means the FASTEST 64K SCRAMS

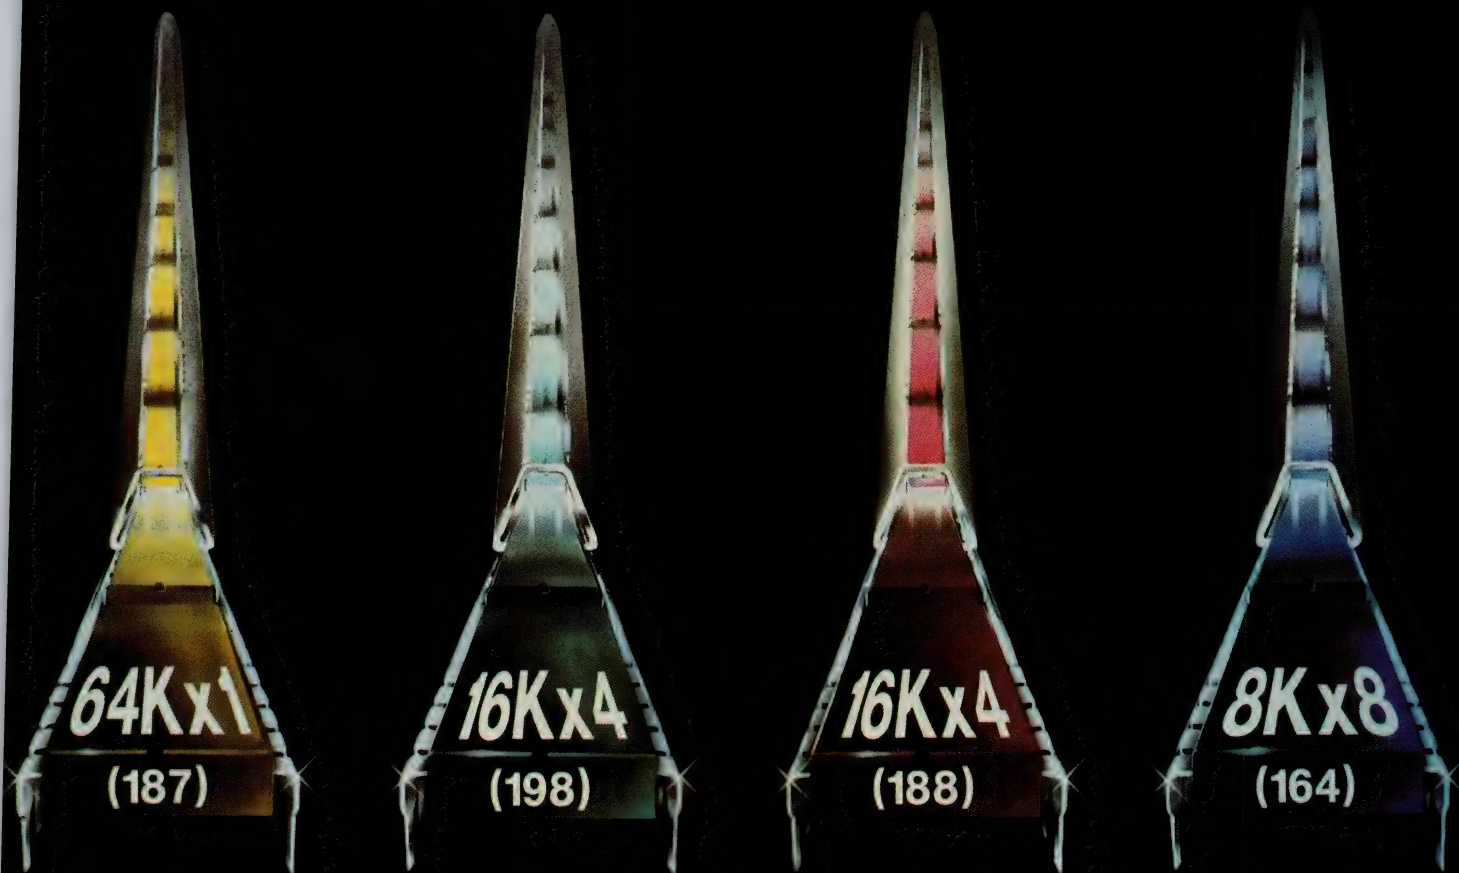

10ns (x1)
12ns (x4)
15ns (x8)

Performance's CMOS 64K SCRAMs (Static CMOS Random Access Memories) are the industry's fastest — as fast as 10ns for x1, 12ns for x4, and 15ns for x8 configurations.

These SCRAMs are ideal for data-bus-intensive RISC and CISC processors. They have extremely fast output enable times to permit fast data bus turnaround for high system throughput. *Also available are x4 SCRAMs with separate I/O.*

At Performance, SCRAMs are manufactured in a six-inch Class 1 fabrication facility using PACE II (0.7 micron gate length) technology which has set the standard for memory speed.

All Performance 64K SCRAMs are available now in DIP, SOJ, and LCC packages.

64K SCRAMs AVAILABLE NOW

PART	CONFIGURATION	SPEED
P4C187	64Kx1	10ns
P4C188	16Kx4	12ns
P4C198	16Kx4 W/OE	12ns
P4C164	8Kx8 W/OE	15ns

FAST, COOL & AFFORDABLE

To get Performance's Data Book, more information, or to order 64K SCRAMs, call or write:



Performance Semiconductor
610 E. Weddell Drive, Sunnyvale, Ca 94089
Telephone: 408 734-9000
FAX: 408 734-0258

PERFORMANCE
SEMICONDUCTOR CORPORATION
CIRCLE NO. 65

a hole is made every 1.75 in. Therefore, the mechanical specifications for a Eurocard have a strange mixture of English and metric units, known as "soft metric" dimensions.

When the Futurebus+ committee met in Stockholm, Sweden, in May, it standardized on full metric dimensions, calling them "hard metric." This was done with an eye toward 1992, when Europe will become one market. The committee discarded the 96-pin Eurocard and its connector, which has 0.1-in. pin centers, in favor of a connector with 2-mm pin centers. The committee chose a panel height for Profile A and B of 300 mm. After leaving room for card guides, the new board is 265 mm wide and 300 mm deep. The committee also changed the board spacing of the card rack from 1 in. to 30 mm.

It's been this waffling on the specifications that has prevented proliferation of hardware for Futurebus+. In fact, Futurebus+ backplanes that Mupac and Bicc-Vero introduced a year ago are essentially obsolete because they conform to the soft metric dimensions in the P896.2 specification. However these companies still offer the products as prototype development tools for developers to learn and experiment with the complexities of Futurebus+.

Both companies are currently developing hard metric backplanes, which they will probably announce when the specification is finalized. In addition, Mupac is developing hard metric enclosures and prototype wire-

wrapped boards. Augat is also developing hard metric backplanes, chassis, extender boards, and prototype boards, but will not offer them for sale until there is IEEE approval of the specification. **EDN**

References

1. P896 Working Group, "Futurebus+ Logical Layer Specifications, P896.1/Draft 8.2," IEEE Computer Society Press, February 14, 1990.
2. P896 Working Group, "Futurebus+ Physical Layer and Profile Specifications, P896.2/Draft 4.0," IEEE Computer Society Press, February 2, 1990.
3. Black, John, "The Futurebus+ committee votes to change the board size," *VMEbus Systems*, June 1990, pg 56.
4. Black, John, "In the Beginning," *VMEbus Systems*, February 1990, pgs 7-9.
5. Black, John, "Futurebus+: its features and how to use them," *VMEbus Systems*, February 1990, pgs 23-40.
6. Grenier, Bob, "Futurebus Hierarchical Caching," *VMEbus Systems*, February 1990, pgs 61-65.

Article Interest Quotient (Circle One)
High 473 Medium 474 Low 475

For more information . . .

For more information on the Futurebus+ products discussed in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

Augat Corp
33 Perry Ave
Attleboro, MA 02703
(508) 222-2202
FAX (508) 222-0693
Circle No. 650

Bicc-Vero Electronics Inc
1000 Sherman Ave
Hamden, CT 06514
(203) 288-8001
TWX 510-227-8890
FAX (203) 287-0062
Circle No. 651

DY-4 Systems
21 Fitzgerald Rd
Nepean, Ontario, Canada
K2H 9J4
(613) 596-9911
FAX (613) 596-0574
Circle No. 652

Mupac Corp
10 Mupac Dr
Brockton, MA 02401
(508) 588-6110
FAX (508) 588-0498
Circle No. 653

National Semiconductor
2900 Semiconductor Dr
Santa Clara, CA 95051
(408) 749-7432
TWX 910-339-9240
Circle No. 654

Newbridge Networks Corp
603 March Rd
Kanata, ON Canada
K2K 2M5
(613) 592-0714
FAX (613) 592-1320
Circle No. 655

Philips/Sigmetics Co
Box 3409
Sunnyvale, CA 94088
(408) 991-2000
Circle No. 656

Texas Instruments Inc
Box 809066
Dallas, TX 75380
(214) 997-5469
FAX (214) 997-5452
Circle No. 657

THE FASTEST, CHEAPEST, EASIEST ARRAY OF GATE ARRAYS.



When it comes to logic devices, no one offers you a wider array of programmable gate arrays than Xilinx.

With toggle rates of up to 100 MHz and densities up to 9,000 gates, Xilinx Field Programmable Gate Arrays offer you the speed you need.

And if that isn't enough, we'll soon be offering even higher speeds and greater gate densities.

All at a fraction of the cost of anything else in the industry.

What's more, our new

Automated Design Implementation and Design Manager software run on PCs and the most popular engineering workstations. So no matter what your platform, you'll benefit from the easiest interface in the industry.


Which means your turn-around time on design revs will be measured in hours, not months. And non-recurring engineering charges will simply be non-existent.

No matter what application you're developing, there's a Xilinx


Field Programmable Gate Array that will make your design faster, cheaper and easier than ever before.

Call 1-800-255-7778 or, if you're working in California, call 408-559-7778. And we'll send you a free copy of the FPGA fact book. It's an objective look at the key reasons why FPGAs should be in your next design.

XILINX
The Programmable
Gate Array Company.SM




At last, an A/D Video Flash Converter that goes down easy.

A sure cure for "board bulge," the Micro Power Systems MP8780 is less than half the size of its 20MHz 28-pin counterparts. Encapsulated in a tiny 24-pin  "skinny" DIP, it delivers 15MHz performance at only 300mW. Just what you need to optimize speed, power and packaging for video digitizing and imaging.

Now you can get full-flash performance at half-flash power. Operating at only 300mW, your system is less demanding on your power supply. Less prone to failure. And less sensitive to thermal problems.

Which one would you rather swallow?

But this tiny monolithic 8-bit CMOS device also gives you more.

More design flexibility. Its 10MHz input bandwidth and adaptable input structure allows you to customize the input voltage range to the exact requirements of your application. More accuracy. Its $\pm 1/2$ LSB enables us to guarantee accuracy to 8-bit performance. More package options. It's available in surface mount.  And more resistance to ESD, with a tolerance exceeding 4000V.

Take the high performance "board bulge" cure. Call us now at 408/562-3660 to receive your free Flash Pack including short form catalog and flash data sheets. Or fax us at 408/562-3605.


We'll be glad to tell you more about the MP8780, or any other device in our complete line of standard high-speed flash converters and 8-16 bit A/D and D/A converters.



Micro Power Systems

3100 Alfred St., Santa Clara, CA 95054

© 1990 Micro Power Systems



real-time Ada Part 3

Ada runtime environments demand close scrutiny

The first two parts of this series on Ada presented an overview of the language and discussed concurrent and low-level programming. This article, the last in the series, describes the requirements that Ada runtime environments must meet and provides criteria for evaluating Ada vendors' runtime implementations.

Benjamin M Brosgol, *Alsys Inc*

Ada isn't just a pure and rarefied theory. Sooner or later, an Ada program must run in the real world on a real computer. Various methods exist for performing any one Ada function, and every Ada vendor has its own body of ideas on how to implement Ada.

The runtime model is the compiler vendor's mapping of the runtime data and processing of your program to an efficient implementation on your target hardware. Every Ada implementation must address such issues as memory-storage organization, data access, subprogram linkage, code-space minimization, and dynamic memory management, among other concerns. Ada vendors make decisions on how to deal with these

issues, and real-time programmers must assess each vendor's implementation for use in their applications.

How a runtime model organizes memory storage is an important consideration when choosing an implementation because Ada offers a flexible memory model. The compiler can store runtime data in three different ways based on allocation and reclamation characteristics.

The simplest storage method, static storage, is pre-allocated at program-load time and only deallocated upon the program's termination. Because data objects declared within library packages are alive throughout program execution, they can reside in static storage.

A more advanced method is stack storage, which is allocated and deallocated in a last-in first-out fashion, so that the portion of memory in use at any moment is logically contiguous. Local-data objects declared in a subprogram or block are alive only during that particular subprogram's or block's execution and, thus, can reside on the stack.

Heap storage, the most flexible but hardest to implement storage method, is allocated and deallocated dynamically, either explicitly by the programmer or implicitly by the runtime executive. The memory portions

The size of the executing program is critically important in real-time environments.

in use are not necessarily contiguous. An object that an Ada "allocator" creates (using the *new* construct) must in general reside on the heap, because it is alive as long as some pointer or access value contains its address.

Room for maneuver

Within these general storage guidelines, an Ada vendor can make many implementation decisions that will affect the efficiency of a program as well as its ability to declare large data items.

To understand the basis for such decisions, first consider that a characteristic of general-purpose, block-structured languages like Ada is hierarchical program structures. These structures let you declare a subprogram locally within another subprogram. Hierarchical structuring organizes a program to reduce complexity.

A side effect of such a structure is that a subprogram

might refer to data items not declared locally but rather in some outer, containing subprogram that is higher in the hierarchy. (In Ada, "program" is not a general term. The defined Ada term "program" refers specifically to the entire body of code running—hence the term subprogram in this context.) A subprogram may also refer to data items declared "globally," that is, in previously compiled library packages. A critical factor in determining the runtime efficiency of an Ada program is how the compiler sets up data accesses for global data, local data, and intermediate ("up-level") data declared in outer subprograms.

A main concern for an application programmer regarding an Ada vendor's implementation of static storage is if the upper bound on the size of the storage area is sufficient for handling programs with large amounts of global data.

This question arises because most processors have

Building and executing Ada programs

Constructing an executable Ada program is basically similar to the steps you would take with other languages. But Ada has a few unique requirements that enhance interface checking across separate-compilation boundaries.

When you compile an Ada program, you must identify not only a source file but also a "program library." As the term suggests, a program library is a database of information about compiled program units. The compiler and other tools in the Ada environment access and update this database. In a cross-compilation environment, the program library resides strictly on the host.

Three types of information correspond to each unit in the program library. The first is the "object code," which the linker will combine with other object modules to form the executable program. The second is the "interface information," which the com-

piler will use when subsequently translating other units. It guarantees that the Ada-language rules are enforced across separate-compilation boundaries. The third is the "dependence relationship" of the unit with previously compiled units, such as through an Ada *with* clause.

Invoking the binder

Ada's unique *binder* is a prelink tool that determines which units will compose the executable program. When you invoke the binder, you identify the main subprogram (that is, the subprogram where program execution will begin) and the program library. Based on the relationships between units, the binder determines which object modules from the library are needed. Although binding and linking are conceptually different steps, in practice you would likely have the binder automatically invoke the system

linker to produce the resulting executable program.

An important optimization for the binder is to eliminate from the executable program those subprograms that are not called. This elimination is likely to yield a significant reduction in code space, because even though an Ada *package* can contain a large number of subprograms, only a fraction of them may be required.

The binder also ensures that compilation for an executable program's constituent units is up to date, thus avoiding interface mismatches. For example, suppose that after compiling a procedure, ALPHA, that takes a parameter value of type FLOAT, you successfully compile another unit, BETA, that calls ALPHA with a floating-point value. Binding BETA will be allowed (Fig A).

However, if you subsequently modify ALPHA to take an INTEGER value instead, and recom-

instructions for fast accesses to data at an offset from a storage base—but are limited on the size of the offset. Thus, there is a tradeoff between execution speed and static-data capacity. Moreover, because the total static-storage requirements become known only at program-bind time (see box, “Building and executing Ada programs” for a description of Ada’s unique *binder*), the compiler does not have the necessary information to choose optimally.

An effective way for an Ada vendor’s implementation to solve this problem is to provide different strategies for dealing with “small” and “large” global data. Small data items can reside in the static-storage area and be accessed efficiently via a fixed offset from the base of this region. Large data, on the other hand, can reside in a different logical-data region. Accesses to large data use a reference to the actual object’s location (Fig 1). This reference resides with the small data

items at a fixed offset from the base of the static-storage region. Thus, an access to a large-data object may pay the price of one level of indirection, but it reduces the risk of the global-data requirements exceeding the processor’s innate size limit on the static-data area. In some cases, compiler optimizations can eliminate the indirection overhead altogether.

Another concern for implementing static storage has to do with a real-time program that runs on a ROM-based target system: Can constant data and initial values reside in ROM, and can the program restart without requiring any downloading? Placing read-only data in ROM requires the compiler to separate statically known constants from other data. In Ada, you can declare a constant with a dynamically computed value; thus, not all Ada constants will necessarily be ROM-able.

When restarting programs, one has to decide how

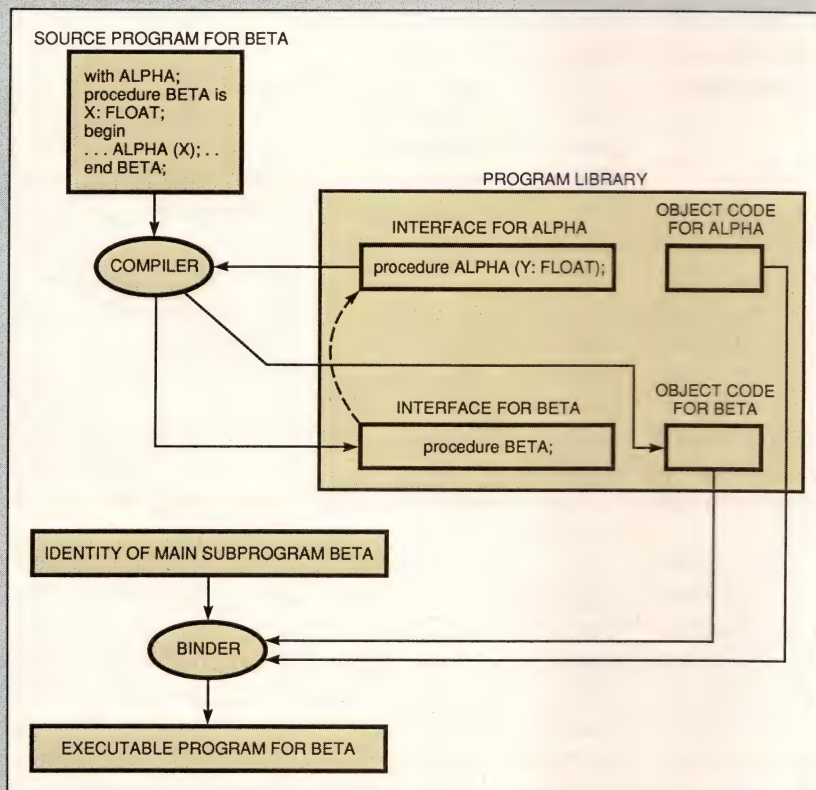


Fig A—Ada’s unique binder links compiled program units and checks all the interfaces between them.

pile it, the dependent unit BETA becomes obsolete. Linking ALPHA and BETA would be an error, because the interfaces no longer match. In fact, the binder will reject any attempt to bind BETA. A bind will only succeed after you have corrected BETA (to pass an INTEGER) and re-compiled it into the program library.

Program execution

Executing an Ada program proceeds in two steps. The first step, sometimes known as *package elaboration*, comprises the runtime processing associated with packages bound into the executable program (such as initializing global data and activating global tasks). The second step actually invokes the main subprogram.

Because Ada's designers wanted to encourage good programming practices, Ada offers the benefits of private types without causing needless overhead.

to reinitialize statically allocated data. Ada lets the programmer specify initial values for variables. The language also provides default initialization for objects of certain data types. An example of a declaration with an explicit initialization is

```
package P is
  ALPHA : array (1..3) of INTEGER := (10, 20, 30);
end P;
```

The example raises the question of how ALPHA acquires its initial values. The *binder* could arrange for initialization during program load. However, this tactic would make restarting the program on the target hardware without a download to the initialized static-data area impossible because, during program execution, the value contained in the variable ALPHA may change. Instead, the Ada implementation should initialize variables at runtime during the "package-elaboration" process, which precedes the invocation of the main procedure. The implementation should optimize this initialization by reserving the values for aggregate array (10, 20, 30) in the constant area. Program restart would then simply repeat the elaboration with an efficient block move, rather than with component-by-component assignment, before invoking the main procedure.

Capacity for local-data storage

Large locally defined data items present a problem similar to that of large global data items. The standard way to implement local-data storage for a block-structured language is a runtime stack. When a subprogram calls another subprogram, the act of calling executes code to claim space at the top of the stack for the called subprogram's local data—this space is a "stackframe" or an "activation record." Note that the code for this operation is invisible to the programmer; although it exists in the runtime image, it never appears in the high-level-language source.

Typically, a dedicated machine register points to the base of the stackframe and the subprogram accesses its local data via offsets from this register. Machine-architecture limitations on the size of these offsets imply, however, that direct addressing of all locally declared items might not be achievable. Therefore, potential users should check that an Ada implementation doesn't restrict local data to offsets from the stackframe's base. Instead, an Ada implementation should provide a strategy for indirect references to large data.

As it does with large data in static storage, the Ada implementation can reserve space at a fixed offset from the stackframe base to hold a reference to the large object. This reference may be either a full-sized offset (with respect to a particular storage base), a machine address, or some other form. An example of a large data item that an Ada implementation might have to handle is

```
procedure PROC is
  ALPHA : array (1 .. 40_000) of CHARACTER;
  ... -- Other declared data
begin
  ...
end PROC;
```

ALPHA requires 40,000 bytes of storage, but Intel 8088/80186/80286 μ Ps, for example, have a size limit of 64k bytes for *procedure* PROC's stack segment. Thus, ALPHA should not reside on the stack; if it does, a distinct danger of storage overflow exists. The Ada compiler can instead reserve a 32-bit pointer in the stack segment to allow addressing of ALPHA. And the runtime executive can allocate ALPHA in a separate area—the heap.

On the other hand, a Motorola 68000 has a limit of 32k bytes for an offset from a storage base, but this limit does not constrain the stackframe. A 68000's runtime model can partition PROC's stackframe into two pieces. The first, a directly addressable part less than 32k bytes in size, contains "small" data objects; its elements are directly accessible via a fixed offset from the stackframe base. The second, an indirectly addressable part bounded only by the addressing space of the hardware, contains "large" data objects; its elements are accessed via a full-length offset that resides in the directly addressable part of the stackframe. Because ALPHA is a large object, an offset to ALPHA goes in the directly addressable part, and ALPHA itself goes in the indirectly addressable part.

An advantage of storing ALPHA in the indirectly addressable part of the stack versus on the heap is that returning from the subprogram automatically reclaims ALPHA's storage. If ALPHA is instead allocated on the heap, reclaiming its space requires additional support from the runtime executive. A programmer acquiring a compiler that uses the heap implicitly for storage of large, locally declared data objects should check that the heap space reserved for each object gets reclaimed on return from the subprogram in which the data item is declared. Such reclaiming is essential

for reducing the risk of "storage exhaustion."

For some machine architectures, the issue of where to allocate small or large data objects does not arise. An Intel 80386 in 32-bit mode, for example, can directly address even large objects from its stackframe base. So the 80386 has no need for either indirection on data accesses or special reclamation support.

One issue that all implementations of block-structured languages such as Ada must face is how to maintain data addressability when invoking a subprogram. For references to global data this addressability is not a problem, because a dedicated register typically points to the base of the global-data area. Similarly, maintaining addressability for local data is not a problem because a dedicated register generally references the base of the current stackframe.

For an up-level reference to a data item declared in an enclosing subprogram higher in the hierarchy, however, the situation is not quite so straightforward. For example, a recursive subprogram can have several stackframes alive at the same time, each with a separate copy of the subprogram's local data. If a lower-level subprogram, defined locally to the recursive subprogram, accesses the recursive subprogram's local data, the Ada implementation must ensure that the lower-level subprogram uses the correct stackframe.

(Note that Ada's scoping rules are more general than C's. In standard C, functions cannot be nested, and so up-level references do not arise.)

Compiler vendors can use one of two principal techniques to ensure the correct stackframe is used. One is a so-called "display vector," which is an array of addresses for the bases of the stackframes containing the referenceable data objects. This vector can reside in a set of dedicated registers or at an accessible area in RAM.

The alternative technique is to keep, at a known location in each stackframe, a static link to the stackframe of the immediately enclosing subprogram, which is the subprogram that is just one level higher.

Up-level references are likely to occur more frequently in Ada programs than in programs written in other languages, because of Ada's package facility. Typically, a programmer writes a package containing at least one subprogram that refers to data declared inside the package. If the package declaration occurs inside a subprogram, the data objects declared by the package have the same lifetime as the local data of the enclosing program. Thus, the package's subprograms may have to make up-level references to nonglobal, dynamically defined data.

These techniques for dealing with up-level references are not unique to Ada; they were developed more than 30 years ago for the first Algol compilers. On the other hand, Ada does allow important optimizations of subprogram linkage, and programmers should check whether a prospective compiler carries these out.

Two factors affect the efficiency of solutions to the up-level-reference problem. One is the cost of performing the up-level reference. The other is the cost of creating the environment (ie, the set of stackframe addresses for statically enclosing subprograms) when a subprogram gets called, and restoring the caller's environment when the subprogram returns. With both factors taken into account, the display-vector mechanism tends to be the more efficient mechanism on most machines.

In some high-order languages, the cost of subprogram calls is so high that programmers avoid using subprograms and instead construct large, monolithic units. This practice results in unmaintainable code with poor modularity. One of the principal design objectives of Ada was to make subprogram linkages extremely efficient by providing fast calls and returns and speedy parameter passing. This efficiency encourages programmers to write modular code, with subprograms

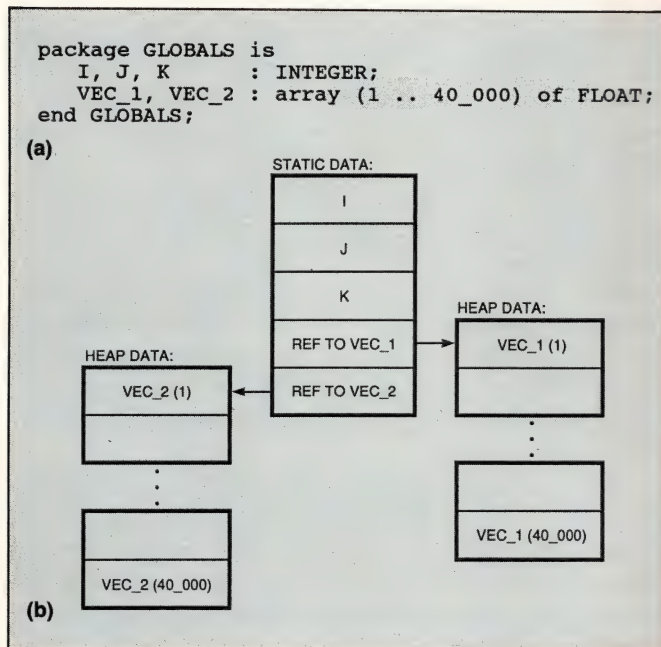


Fig 1—To guard against stack overflow, an Ada implementation should be able to store large, local-data objects (a) in the heap. A pointer on the stack accesses such large objects indirectly (b).

In some high-order languages, the cost of subprogram calls is so high that programmers avoid using subprograms and, instead, construct large, monolithic units.

corresponding to logically coherent processing steps and with explicit parameter passing (versus sharing global data) to reduce coupling between modules.

A compiler designer's decisions affect the efficiency of subprogram linkages, and an application programmer should check how Ada vendors implement them. The choices for calling-sequence and parameter-passing implementations are important, as is minimizing the time spent maintaining up-level addressability. A good Ada implementation can yield faster subprogram linkages than other languages, such as Pascal, because Ada doesn't use subprograms as runtime parameters and, thus, facilitates certain optimizations.

Ada's pragma `INLINE` also helps the language obtain fast subprogram linkages. This pragma eliminates the cost of calls and returns for short subprograms by expanding the subprogram, somewhat like a macro, at the point of call.

The first two articles in this series (EDN, September 3, 1990, pg 153, and EDN, September 17, 1990, pg 151) emphasized the important principle of data abstraction, which localizes the effect of maintenance modifications to data-structure definitions. To obtain this benefit in Ada, the programmer declares a private type in a package. Ada's rules guarantee that only subprograms explicitly defined along with the type can manipulate objects of that type. In many real instances, however, subprograms are short pieces of code that simply access an element of a data structure. Here, the cost of the subprogram's call and return may be greater than that of executing the actual subprogram body.

Because Ada's designers wanted to encourage programmers to use good programming practices without sacrificing efficiency, you should not be surprised to find that Ada does allow the benefits of private types without causing needless overhead. The pragma `INLINE` is the way to do this.

Keep program size to a minimum

The size of the executing program is critically important in real-time environments; understanding the kinds of implementation decisions that affect program size are, therefore, important too. Because an executing program consists of both compiled code and runtime-executive routines, a user should look at both components when judging the space efficiency of a compiler system. A compiler implementor can artificially reduce the size of the runtime executive by expanding various runtime services in line. For very small pro-

grams, this scheme may save space, but for more realistically sized applications, the expansions are likely to outweigh any savings from a small runtime executive.

At the other extreme, a compiler vendor attempting to minimize the size of compiled code can use out-of-line calls instead of in-line instructions. But this tack will, of course, result in a substantial time penalty. Thus, assessing code-space efficiency requires inspecting the sizes of both the compiled code and the runtime executive, preferably for real applications and not artificial benchmarks.

An important—in fact, essential—optimization for an Ada compiler is to eliminate from the executable image those subprograms for which no calls appear in the program. This elimination is especially useful in Ada, because a package used in an application may contain a large number of subprograms with only a small fraction actually getting invoked. The prelink (binder) tool in some Ada compiler systems performs this optimization.

If the compiler vendor's runtime executive is itself written in Ada, then eliminating unused subprograms in the runtime executive itself will reduce the size of the executive—a potentially useful side effect.

In addition to eliminating unused subprograms, a compiler vendor may also supply reduced-size versions of the runtime executive comprising different sets of Ada features for different Ada programs. As an example, one version of Alsys's `SMALL Ada Run-Time (Smart-Exec)` for a Motorola 680x0 target processor occupies 1.5k bytes without resorting to extra inlining in the compiled code.

Ada requires dynamic memory management, but its implementation—particularly the method for storage deallocation—varies between vendors. Memory management tends to depend on the application; an implementation appropriate for an artificial-intelligence program will probably be unsuitable for real-time applications. For real-time applications, the Ada implementation must provide several dynamic memory-management characteristics.

One such characteristic is immediate unchecked deallocation. Using Ada, an application programmer can reclaim, explicitly, the storage space that an allocated object occupies. Deferring a deallocation is of little use because storage overflow may occur in the application program.

The Ada implementation must also provide support for the pragma `CONTROLLED` and for the `'STORAGE_SIZE` representation clause. Ada programmers

should be able to ensure that they can reclaim the memory space occupied by an entire set of objects allocated for a particular "access type"—also known as the access type's collection—when their program's control leaves the scope of the access type. The Ada implementation can arrange this reclaiming through the pragma `CONTROLLED`, which is either explicitly provided by the programmer or automatically supplied by the Ada implementation for nonglobal access types. An alternative technique for reclaiming memory space is through a "representation clause," which associates a collection size (`'STORAGE_SIZE`) with an access type.

Although the Ada language allows an implementation to provide automatic "garbage collection" when storage is exhausted, such an approach is not appropriate in real-time applications. Automatic-reclamation schemes suffer from unbounded execution times, which could cause your program to miss a critical deadline. Similarly, "on-the-fly" incremental-reclamation techniques also incur too much overhead for real-time systems. Furthermore, the execution time for an allocation and for a deallocation must be predictable, so that the programmer can ensure that his or her program meets its real-time deadlines.

A potentially lethal bug for the kinds of long-running

programs that are typical in real-time applications is the phenomenon known as storage leakage—gradually exhausting dynamic storage by failing to reclaim storage that is no longer used. If, in a program comprising a loop, even a small amount of storage is used but not reclaimed at each loop iteration, the program will eventually terminate with a `STORAGE_ERROR` exception. Part of the responsibility of preventing this error rests with the programmer, but the Ada implementation of the runtime executive must also be designed properly. In particular, when control passes out of any scope, whether normally or through a "propagated" exception, the runtime executive must completely deallocate any storage that it implicitly allocated during the execution of the scope (as well as storage from access types that are local to the exited scope). Similarly, storage for a terminated task must be completely reclaimed.

The Ada implementation should avoid fragmentation that can cause `STORAGE_ERROR`. In some cases, depending on the execution order of subprograms that allocate and deallocate memory, the heap can get fragmented. If it does, the total available space might satisfy a request from an allocator, but the largest contiguous free area could still be too small. Because automatic compacting would violate the requirement for predict-

Glossary of Ada terms

Allocator (*new*)—An Ada feature that dynamically creates an object and delivers an "access value"—or pointer—to designate the object.

Binder—The tool in an Ada compilation system that, when given the name of the main subprogram and the identity of a program library, determines the compilation units needed to compose the program and (as a user option) links them to form an executable program.

Heap—A storage area containing data objects whose allocation and reclamation is not necessarily last-in first-out. The heap, therefore, requires explicit reclama-

tion support from the programmer or the runtime environment.

Package elaboration—The initializing step at program execution before the main subprogram is invoked.

Pragma—A directive to the compiler, typically for optimization.

Runtime model—The set of decisions made by the compiler vendor that governs the compiled code's and runtime environment's usage of target-machine resources.

Runtime stack—The data storage area for each task, managed in last-in first-out fashion, that is used at runtime for subprograms' parameters and local variables.

At any point in program execution, a task's stack consists of a sequence of stackframes for subprograms whose execution is in progress.

Scalar—A data item having a numeric or enumeration type.

Scope—A region of program text in which a declared name has meaning.

Stackframe—The segment of a runtime stack containing the parameters and local data of a subprogram.

Subprogram linkage—The conventions for calling and returning from a subprogram, establishing data addressability, and passing parameters.

One issue that all implementations of block-structured languages such as Ada must face is how to maintain data addressability when invoking a subprogram.

able execution times, this issue is more in the domain of the application programmer. Nevertheless, some heap-management methods are less prone than others to storage fragmentation, so the application programmer should check the characteristics of an Ada implementation to see if fragmentation will be an issue. Note that some Ada implementations allow applications programmers to tailor storage-management algorithms or to monitor heap usage as the program runs.

Choosing an exception-handling approach

An Ada implementation's exception-handling facility should detect and respond to synchronous runtime events that occur infrequently (which are most often errors) and that do not require control to return to the point of occurrence. Examples include arithmetic and buffer overflows, and data-format errors. The runtime-system designer's main implementation decisions are how to detect where an exception is raised, and how to find an associated handler.

The choice depends on the tradeoffs that the runtime system makes. If the goal is to minimize the time spent in raising and handling exceptions (at the possible expense of subprogram linkages), then at each subprogram call, the runtime system passes an implicit parameter identifying the location of the handlers for exceptions that the called subprogram might raise.

On the other hand, if the goal is to optimize subprogram calls, the runtime system passes no exception-related information at subprogram invocation. Instead, the compiler and binder generate scope and handler tables. The exception manager code in the runtime executive interrogates these tables only when an exception is raised or propagated.

Because Ada's designers intended exceptions only for infrequent events, the table approach is preferable. Its efficiency in dealing with normal subprogram calls more than offsets its extra cost when raising or handling exceptions. Subprograms are such an important program-structuring technique that users should view them as essentially zero-overhead features. Thus, there should be no exception-related costs to subprogram calls.

The tasking features in Ada for real-time applications place demands on the design and implementation of the runtime system. The principal issues are time efficiency, space efficiency, and real-time functionality.

Certainly an important consideration is the speed of the Ada "rendezvous." The compiler can and should detect special cases and handle them in the most effi-

cient way. One example of a rendezvous that needs special handling is the so-called synchronization rendezvous (Fig 2). The call `DEVICE_1.READY` is for synchronization, not data communication. If `DEVICE_1` is suspended at its *accept* and then the higher-or equal-priority task `DEVICE_CONTROLLER` executes the *entry* call, no real need exists to switch contexts to the `DEVICE_1` task. Instead, the runtime system can simply mark `DEVICE_1` as eligible for execution, and `DEVICE_CONTROLLER` can continue immediately; no context swaps are involved.

There are several space-related issues associated with implementing tasking in an Ada runtime system. One is the size of the task control block—the repository of state information for a task during its execution. To support large numbers of tasks, the task-control block should be compact. Another issue is the size of each task's stack. The programmer should be able to specify stack sizes (through the 'STORAGE_SIZE representation clause), because a task will often not need much stack space. Moreover, once a task terminates, the runtime system should immediately reclaim all the task's resources.

A final tasking consideration is load insensitivity. The number of tasks in the program should not affect the speed of tasking operations.

Runtime functions

Real-time applications demand that the Ada runtime system support certain functions. For example, when a delay for a high-priority task expires, the runtime executive must immediately pre-empt any executing lower-priority task so that the awakening task can run. As another example, executing an abort statement must immediately place the aborted task in an abnor-

```
task DEVICE_1 is
  entry READY;
  ...
end DEVICE_1;

task DEVICE_CONTROLLER;


task body DEVICE_1 is
  ...
begin
  ... -- Initialization
  accept READY;
  ...
end DEVICE_1;

task body DEVICE_CONTROLLER is
  ...
begin
  ...
  DEVICE_1.READY;
  ... -- Continue, knowing that DEVICE_1 initialization has occurred
end DEVICE_CONTROLLER;
```

Fig 2—The `DEVICE_CONTROLLER` task executes a rendezvous for synchronization, not communication, purposes.

Congress OF THE United States


*begin and hold at the City of New York on
Wednesday the fourth of March one thousand seven hundred eighty nine*

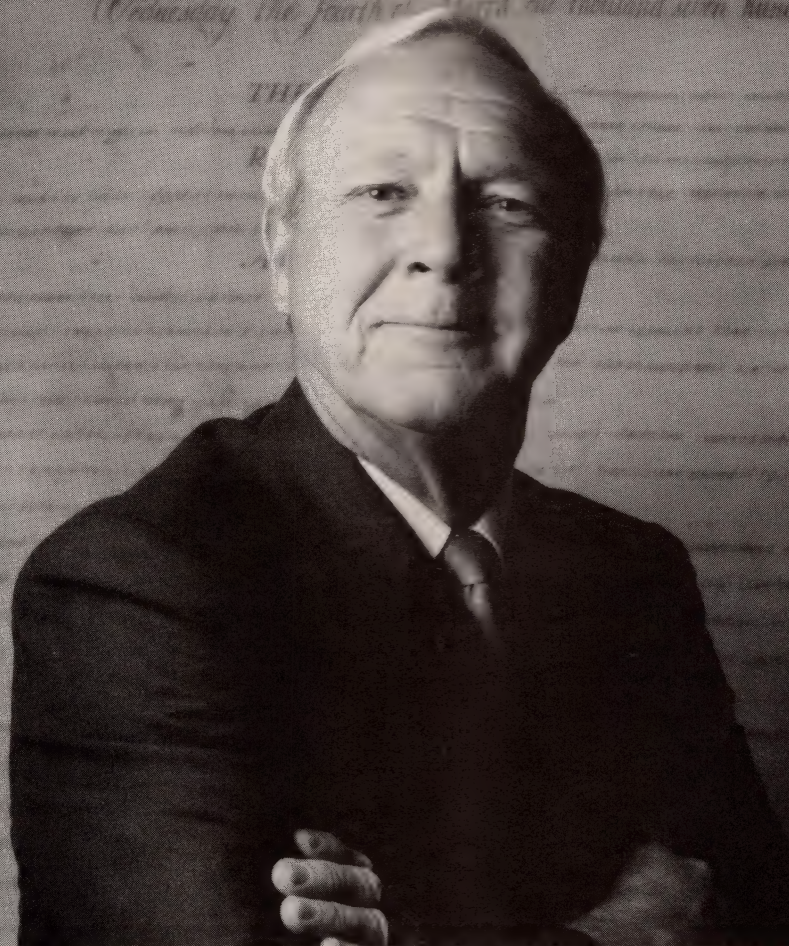

**IF EASTERN EUROPE WANTS TO GET PRODUCTIVE AGAIN,
WE'LL SHOW THEM A SYSTEM THAT WORKS.**

For the past 200 years, the Constitution and the Bill of Rights have been the blueprint for the most productive system of government on earth. To copy it, you'll need another system that delivers just as reliably: The Lanier Copier System. It's guaranteed to be up and

running 98% of the time. And you'll get a loaner for the time it's not. And you'll get a 24-hour-toll-free Hot Line for any questions. So for more productivity, call **1-800-852-2679**. And get up and running without a lot of red tape.

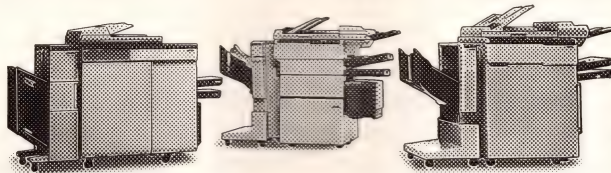

LANIER
COPYING SYSTEMS

 **HARRIS**

Some restrictions apply. See your local Lanier copier representative for full details.

A critical factor in determining the run-time efficiency of an Ada program is how the compiler sets up data accesses.

mal state. Deferring these operations could lead to missed deadlines, so an implementation that uses a polling scheme—waiting until synchronization points to identify the highest priority task eligible to run—is not appropriate for real-time applications. Users should also be able to control certain aspects of scheduling behavior, such as whether equal-priority tasks are time-sliced or run until blocked.

Recently, some developments have occurred in real-time scheduling theory that apply to Ada. The main developments are based on the rate-monotonic scheduling algorithm, which assigns priorities to periodic tasks so that the tasks with the shortest periods get the highest priorities. If rate-monotonic scheduling is used, then an application programmer can guarantee that the deadlines of all the periodic tasks will be met, provided that the total processor utilization is less than a bound given by a simple arithmetic formula. A real-time programmer can thus express an application using Ada tasks, with the runtime executive automatically multiplexing the tasks, rather than take the error-prone approach of developing a cyclic executive and performing explicit task switching.

One potential problem whenever tasks are not independent is *priority inversion*—the blocking of a higher-priority task by an executing lower-priority task. Certain kinds of priority inversion may be unavoidable, for example, in instances when tasks of different priorities are using a shared resource. Suppose that a low-priority task is accessing such a resource (for example, sending output to a display). If a high-priority task awakens, it will pre-empt the low-priority task and begin executing. However, if the high-priority task then tries to access the same shared resource, it will be blocked, the low-priority task will resume, and the high-priority task will only be able to continue when the low-priority task has finished with the resource. Although this is a form of priority inversion, it is needed to prevent uncontrolled accesses to shared resources.

Other forms of priority inversion may arise under certain scheduling algorithms. Several approaches are available for dealing with priority inversion, such as alternative scheduling mechanisms provided as a supplement to the vendor's Ada runtime executive, or stylistic guidelines for application programmers in composing tasks and assigning priorities. The stylistic approach has the benefit of portability; it does not require specific support from an Ada vendor's runtime executive.

The second part of this series described how you could program interrupt handling in Ada. In short, the challenge is to use Ada for interrupts but to avoid task-scheduling overhead. One approach is to differentiate between the immediate processing and the deferred processing associated with an interrupt. The CPU carries out immediate processing at hardware-interrupt-priority level where it performs hardware-specific actions. Deferred processing begins by invoking a "task entry" to an interrupt-handler task with the hardware-level interrupt's data.

An application programmer would want interrupt handling to be expressive and efficient, and have low interrupt latency. The programmer should be able to write interrupt handlers either in Ada or in assembly code; the time between the interrupt and the invocation of the user-supplied routine should be minimal; and the runtime system should also minimize the amount of time during which it disables interrupts.

Configurability and kernel interfaces

Configurability is the user's control over the target-system configuration; in particular, the matching of the runtime executive's software to the target board. Any facility for adapting the runtime executive should assume that the application programmer is familiar with the target board but not necessarily an expert on how the vendor's Ada runtime executive works. The programmer certainly should not have to modify the executive's source code. The availability of sample-board support *packages* illustrating how to configure the runtime system is essential. The user should be able to specify such configuration parameters as the amount of target RAM and such routines as simple (serial) host/target-communication routines, program-startup routines, console input-output routines, timer-management routines, and file and device input-output routines.

The configuration routines and the application code require access to a variety of low-level services, so a bare machine kernel should be available to perform functions such as installing interrupt handlers, obtaining absolute time, servicing an alarm expiration, reading a character from console input, and writing a character to console output.

Supplementing the bare machine kernel, a real-time kernel is also useful for low-level control over runtime behavior. An Ada package can provide the appropriate interface, including subprograms that enable and disable task scheduling, obtain or modify a task's priority,

It's no fluke.



Made in the U.S.A.

Feature	Fluke Model 77	Beckman Industrial RMS225
Digits	3-1/2 Digits	4 Digits
Resolution	3,200 Counts	10,000 Counts
Accuracy	0.3%	0.25%
Automatic Reading Hold	Touch Hold®	Probe Hold™
Analog Bar Graph	31 Segments	41 Segments
Battery Life	2,000 Hrs	1,000 Hrs
10A Range	✓ (Fused)	✓ (Unfused)
Protective Holster	✓	✓
3 Year Warranty	✓	✓
True RMS		✓
Auto Min Max™		✓
Relative Mode		✓
Self-Resetting Fuse		✓ (40mA Input)
Price	\$159*	\$149

* Touch Hold is a registered trademark of the John Fluke Mfg. Co., Inc. * 1990 Fluke and Philips Catalog

Your best auto-ranging multimeter for the money. It doesn't happen by accident.


It takes expertise, painstaking R&D, and a solid commitment to provide you with the features you've asked for at a price you can afford.

When you add it all up, the new Beckman Industrial RMS225 simply outperforms any meter in its class. And like all the

other multimeters we've built over the years, it's designed for long lasting and

trouble-free use. So, go visit your local distributor today and check out the new RMS225 digital

multimeter. Once you compare it to the others, the choice will be obvious.

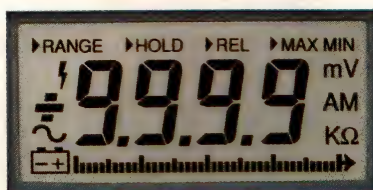


Beckman Industrial™

An Affiliate of Emerson Electric Co.

Instrumentation Products Division
3883 Ruffin Road, San Diego, CA 92123-1898
(619) 495-3200 • FAX (619) 268-0172 • TLX 249031
Outside California 1-800-854-2708 Within California 1-800-227-9781

© 1990 Beckman Industrial Corporation. Specifications subject to change without notice. Fluke is a registered trademark of John Fluke Mfg. Co., Inc.

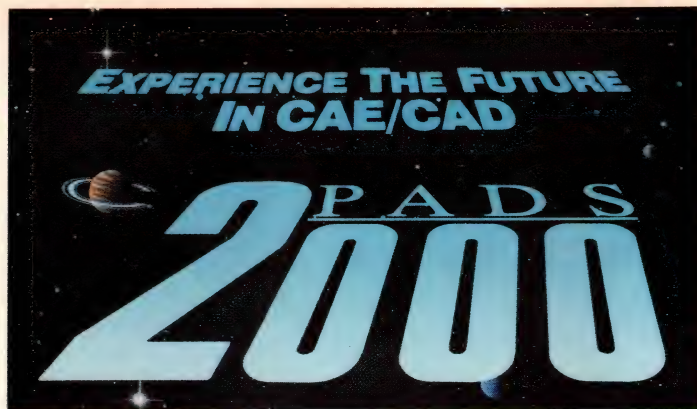

PADS is a Personal Computer based Printed Circuit board design system with many advanced features capable of outperforming most Workstation-based CAD systems—at a fraction of the cost.

As the most productive PC based board CAD system available today, PADS-2000 can handle complex designs including: double sided surface mount boards, mixed technology boards, high speed designs and layouts exceeding 2000 IC's.

PADS-2000 design functionality includes:

- Over 11,000 parts/32,000 connections • 1 micron Resolution
- True T-Routing capability • Intelligent Copper Pour feature leaving isolated tracks and pads • 0.1° parts/pads rotation • Extensive Macro capability • Digital, Analog and Critical Circuit autorouters
- On-line and Batch Design Rule Checking • Instant track/segment length measurement • Complete Forward/Backward ECO capability
- Uses 32 bit/386 native code for increased speed and functionality
- Easy-to-learn and Easy-to-use

Call today for a demonstration at your local authorized CAD Software Dealer.

Ask about our affordable Leasing Plan.

Inside MA: (508) 486-8929 Outside MA: (800) 255-7814




CIRCLE NO. 6

enable and disable interrupts, and read or write a byte from or to a port.

Ada provides a natural-language tool for real-time programmers, with features to express parallelism, interrupts, and low-level control. Its high degree of compile-time checking detects errors early. Language constructs alone, however, are not sufficient. To realize the potential benefits of Ada, users should check that compiler implementors meet hard runtime requirements in the areas of speed, compactness, capacity, predictability, and configurability. **EDN**

Author's biography

Benjamin Brosgol is vice president and technical director at Alslys Inc (Burlington, MA). He is in charge of the company's Ada training and consulting, has helped develop Ada compilers and computer-based training products, and is chairman of the Commercial Ada Users Working Group of the SIGAda professional society. Benjamin holds an MS and PhD in Applied Mathematics from Harvard University in Cambridge, MA, and is a member of both the IEEE and the Association for Computing Machinery.



Article Interest Quotient (Circle One)
High 470 Medium 471 Low 472


WHAT'S COMING IN EDN

EDN's October 11, 1990, issue will feature a staff-written Special Report on video A/D converters. Part 3 of the real-time software programming series will discuss verbal and graphical requirements models for formulating operating-system behavior. EDN's DSP-chip directory will provide detailed descriptions of many DSP products. And we will preview the 1990 Electronica show.


In EDN's October 25, 1990, issue, a special test and measurement issue, look for coverage of low-cost digital oscilloscopes and portable PCs as instrument controllers.

NEW! HERE'S YOUR SOLUTION TO COMPUTER CONTROLLED AC POWER—15kVA TO 100kVA

Finally, the first low cost, computer controllable AC Source for large power applications. With Behlman's PA Series you have complete control of output frequency and voltage wave form characteristics. Plus measurements of all output parameters are reported over the front panel display and the computer interface. A small footprint, high reliability and modular expansion, make the PA Series the most attractive and cost effective solution for manual or computer controlled power applications.

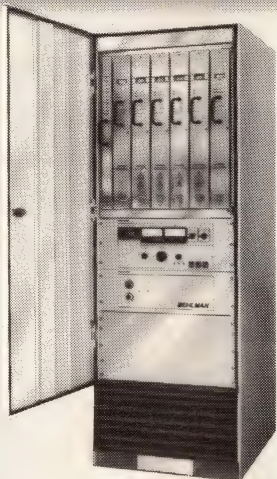

- Burn-In
- Quality Control
- Facility Power
- Flightline/Marine
- ATE Systems
- Laboratories
- Avionics Testing
- Motor Generator Replacement



When you need AC Power, think Behlman.
Call or write today for more information.

Call (800) 456-2006

BEHLMAN
An Astrosystems Company

2021 Sperry Avenue, #18
Ventura, California 93003
Phone (805) 642-0660
FAX (805) 642-0790



FAST FOCUS ON FUZZY DATA

Neural technology for everyday applications! Micro Devices combines the latest in artificial intelligence ICs with a hardware neural network in its MD1210 Fuzzy Set Comparator.

Capable of comparing eight unknowns to one known or one unknown to eight knowns, the FSC delivers a decision in as little as 250 ns! And the device's expandable architecture allows simultaneous examination of up

to 256 fuzzy sets — with no loss of speed!

The FSC is ideal for recognition systems (object, voice, currency, fingerprint, etc.), security and surveillance, target acquisition and tracking, CAM, robot control and a myriad of other applications. The device is appropriate wherever noisy, fragmentary, inaccurate or real-time data must be relied on.

Using off-the-shelf memory devices and a standard microprocessor interface, the unit is versatile, economical and easy to implement in design.


For detailed specifications and application aid, contact




Try the MD1210 on your XT or AT! \$250 gets you an Evaluation Kit that includes a comparator with memory, a video interface, software and documentation. Ask for details!

 **Micro
Devices**

30 Skyline Drive
Lake Mary, FL 32746-6201 USA
Telephone 407/333-4379;
FAX 407/333-4479.



MD1210-1 (68-pin PLCC)



MD1210-2 (40-pin DIP)

A black and white photograph of a hand holding a small, rectangular integrated circuit (IC) chip. The chip is labeled 'PAL U7'. The bottom of the chip is engulfed in a bright orange and yellow flame, with smoke rising from it. In the background, other similar chips are visible on a circuit board.

A few words of advice from
high-performance μ PLDs.

Chill out, PAL.

Many designers have hot, high-performance designs. Literally.

Fortunately, Intel has a simple way to reduce system heat and still get incredible performance. The μ PLD Family of programmable logic devices.

Take, for example, the 85C220 and 85C224. They operate at 80MHz (100 MHz internally) with only a 10ns total propagation delay.

And since μ PLDs are manufactured using Intel's CHMOS* technology, they require just 1/4 the power of their pin-compatible bipolar PAL* alternatives. Which means they can lower

system heat by 35 percent and help reduce board-level failures, too. So they're certain to give your high-performance system a boost. And send chills up the spine of your motherboard.

Learn more about Intel μ PLDs and receive a μ PLD/PAL heat comparison. Call (800) 548-4725 and ask for Literature Packet #IA28.

Otherwise, you could take some heat over your system design.

intel[®]

The multitasking mindset meets the operating system

Part 2 of this series delves further into the nature of real-time programming. It addresses some of the concerns that are unique to real time and describes how the programmer and the operating system handle these concerns.

David L Ripps, *Industrial Programming Inc*

One of the most difficult aspects of real-time work is getting into the right mindset. You must become accustomed to multitasking: to thinking in terms of multiple threads of execution running in parallel. An interrupt can occur between any two instructions within a task. This may require the operating system (OS) to suspend the currently executing task and start another. The suspension and later resumption are handled completely by the OS; they are "invisible" to the task. Nevertheless, this discontinuity can have several important side effects.

In a real-time application, the arrival of an interrupt is normally random with respect to the portion of code that happens to be executing. The interrupt must be serviced. This delays the interrupted code. As a result, the execution time for any portion of task code may be unpredictable. This is true even if the time to perform a given line of (uninterrupted) application code or to supply a given


OS service is perfectly predictable. Random variations in performance are inherent in the nature of real-time programs.

Furthermore, under certain conditions, the small variations due to random interrupts can magnify into chaotic behavior. Suppose ordinarily there is barely enough time to perform some sections of a cyclic or repetitive application. Suppose, further, that the program takes a different path when one of these precarious sections is unable to finish in time. On most cycles, there is sufficient time and the program follows its normal path. Occasionally, an unfortunate combination of interrupts causes a time out and then the program diverges onto an alternate path. This variation, in turn, can affect the timing on the next cycle. The result can be a radically different pattern of behavior generated by a very small variation in the arrival time of an interrupt. For a discussion of chaotic phenomena in real time systems, see "Inner Rhythms" in James Gleick's book on chaos (Ref 1).

A second side effect of a multitasking organization concerns any alterable data that is shared at the task level. Consider a concrete example. Task U is performing some calculations with a set of shared, alterable data. Without any warning, U is preempted by task P,


which happens to be another user of the same data. If P were permitted to change the data, the results of the calculations performed by U would become unreliable.

The solution to such problems cannot be to disable interrupts. That technique can lead to the loss of any short-lived data whose arrival is signaled by an inter-

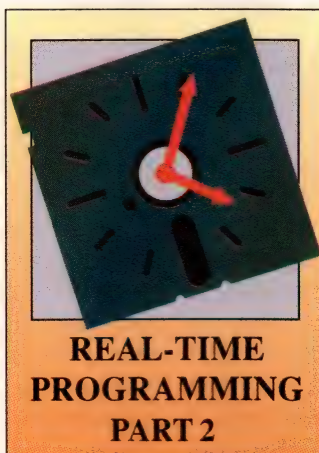

From the book, *An Implementation Guide to Real-time Programming*, by David L Ripps, ©1989. Excerpted by permission of Prentice-Hall Inc, Englewood Cliffs, NJ.

rupt. Nor can the general solution be to raise a task to the highest level of urgency so that no other task can pre-empt it. In a single-processor system, only one task can protect itself by being most urgent. In a multi-processor system (that is, a system with two or more processors executing task code), even the most urgent

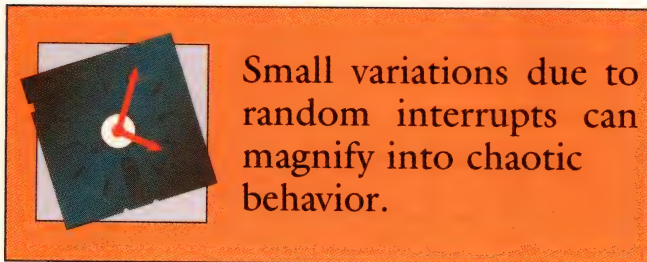

Small variations due to random interrupts can magnify into chaotic behavior.

task may find itself sharing data with a less urgent task that is executing on another processor.

Luckily, there are facilities within a real-time operating system that enable a task to block temporarily other users of the same data (see the discussion of semaphores and controlled shared variables later in this article). But this is where mindset comes into play. The OS cannot automatically set up this type of protection. The designer of the task code must remember to ask for the protection before the first access of the data and must remember to release the protection after the last access.

Coordination and communication

Part 1 of this series defined a task as a complete program that is capable of independent execution. This is true, but it needs further refinement. While a task is *physically* complete and executable, it is not *logically* independent of the other tasks.

Each task performs a small part of the overall application, working in parallel with other tasks. At various points, the tasks must coordinate their activities. For example, a task that does an initial analysis of raw data must wait for the task that captures the data to build a complete set of values. The task that performs a deeper analysis, in turn, must wait for the results of the preanalysis. Similarly, when several tasks output reports on a shared terminal, each must wait until it can have exclusive access to the device. Otherwise, the intermixed display might be unintelligible.

Thus, tasks are not independent; they share common goals, common data, and common hardware. As a result, they must rely heavily on the OS to coordinate their individual executions. Planning the way tasks will coordinate and communicate is a major part of the design of a real-time application. These two concepts, coordination and communication, are common threads

that are woven throughout the services provided by a real-time operating system.

Coordination and synchronization

Coordination is the blocking of a task until some specified condition is met. With this broad a definition of coordination, a task can coordinate with physical events as well as with itself and other tasks. For example, when a task pauses, it is blocked until the specified time elapses. The task is therefore coordinating with the physical clock.

Often a task coordinates with another task; the condition that task *W* is waiting for is set by another task, *C*. As you will see later, it is even possible for a task to become unblocked by a set of conditions that are supplied jointly by one or more tasks and by a physical device (the clock). Thus, coordination is a very general term for any self-imposed (that is, requested) suspension of the execution of a task. In every case, it is the OS that performs the requested suspension and eventual resumption of task activity.

The term "synchronization" is often applied to what this article is calling coordination. Some authors limit synchronization to task-to-task interactions and so would not apply the term to a pause.

Self-coordination

A few services provided by an OS are guaranteed to return immediately with the desired result; they never block the task. Examples are the services that just return information held by the OS, such as the caller's priority or the current time of day.

In contrast, any service that requires the allocation of a resource (such as memory) or that needs a task-level object to be free may be delayed until the resource or object becomes available. Such services involve coordination. In this case, the task is coordinating with itself, or more precisely, with the completion of a service it itself requested.

The simplest way to coordinate is merely to block the task until the service is finished. And in many cases, the simplest is best, especially if the task cannot perform further work until the service is done. Most real-time operating systems provide this coordination mode.

The problem with waiting until a service is completed is that there is no guarantee that the service will ever be completed or that the waiting time will not compromise other more urgent aspects of the task's work. Many critical real-time applications cannot risk any uncontrolled waits. Thus, the operating system, MTOS-UX, permits the basic coordination mode to be augmented by a maximum wait time. If the request

cannot be processed within that time, the request is timed out and the task continues. If this occurs, the OS informs the task of the failure. The interval can be zero to provide "fail unless immediately available."

"No coordination" is another mode that is available for many services. In this mode, the OS permits a task to send a message with no coordination if the sender does not care when the message is received.

Finally, there are times when a task needs a service performed but would like to defer coordination until later. Suppose task **R** wants to have three other tasks started now, but would also like to continue to do other work. Upon the completion of that other work, **R** is willing to wait for the termination of the three tasks it started. Such deferred coordination is permitted under MTOS-UX through the event flag machinery. As you will see later in this article, each start request would specify a different local event flag, an internal bit that can be set when the service is completed. Later, task **R** would ask the OS to block it until all three bits have been set.

Communication

Communication is the transfer of information between tasks. I/O covers the transfer of information between the external world and a task. Communication can proceed directly from one task to another. For example, when task **S** starts task **T**, **S** can transmit an argument to **T** (just as the caller can pass an argument to a procedure). Often, however, communication is best mitigated by a separate object, called a message exchange. This is a public queue to which any task can send a message and from which any task can receive a message.

Commonly, communication involves coordination. It is unusual to seek a message and not wait for it to arrive. However, the sender of a message may not need to wait for it to be received.

OS objects and their functions

A real-time operating system is an object-oriented program. The primary objects it deals with are executable objects (tasks), communication/coordination objects (message exchanges, event flag groups, semaphores, and controlled shared variables), and I/O objects (peripheral units). Objects can be created and destroyed. Each object has a set of functions that apply only to that class of objects. You can start a task executing; it is erroneous to request a message exchange to start executing.

One measure of the richness of a real-time operating system is the number of distinct types of objects it provides and the number of manipulations on those

crtask	Create task.
start	Start given task.
tstart	Start given task and transfer coordination to new task.
contask	Connect given task to interrupt.
setpty	Set current priority of given task.
exeprc	Set (or reset) processor on which requesting task can execute.
getkey	Get key of given task.
gettid	Get identifier of task with given key.
getdad	Get address of data segments of requesting task.
exit	Terminate requesting task (without automatic restart).
trmrst	Terminate task with automatic restart after given interval of time.
dltask	Delete requesting task.

Fig 1—Task control is a basic function of the operating system.

objects that it permits. By that measure, the illustrative OS chosen for this series of articles (MTOS-UX) is a very rich system. The objects and service functions supported by MTOS-UX are summarized very briefly in the next eight sections of this article. Each synopsis is greatly expanded in a later part of this series.

Task control services

One task can create another task. The creator specifies the basic attributes of the new object: its entry point, stack size, default priority, and so on. A newly created task is not yet executing; it is Dormant.


Any task (**R**) can request that any task (**T**) start executing. **R** can select the priority with which **T** will begin to run. **R** can pass an argument on to **T**. **R** can indicate what should happen if **T** is already executing, and thus cannot be restarted immediately. The choices are: (1) to queue the restart request or (2) to abort it. Finally, **R** can specify if it will: (1) continue to execute in parallel with **T**, (2) wait until **T** starts because of this request (in case **T** is not immediately available for restart), or (3) wait until **T** both starts and terminates because of the current request. As Part 4 will explain, there are cases in which all three types of coordination are required.

A task can dynamically change its own priority. It can also change the priority of another task. When a task finishes executing, it can simply terminate. This makes the task available for restart by another task. Alternately, a task can terminate now and be automatically restarted at a specified future time. This latter option is needed for cyclic tasks that perform some action periodically. In many real-time applications, tasks persist for the entire life of the system. Nevertheless, a task can request to be both terminated and then deleted. Fig 1 provides a complete list of task services; the primary discussion will appear in Part 4 of this series.

Event Flags

Event flags broadcast information that can be employed in intertask coordination. Any task can create a public-event flag group. Each group contains 16 bits that can be independently set or reset by any task.

The individual bits represent information that is meaningful to the application. For example, setting bit 2 in group 'PNTS' might mean that the printer has been installed. (Any such logical significance of the bits is unknown to the OS, which just views the event flag group as 16 alterable bits.)

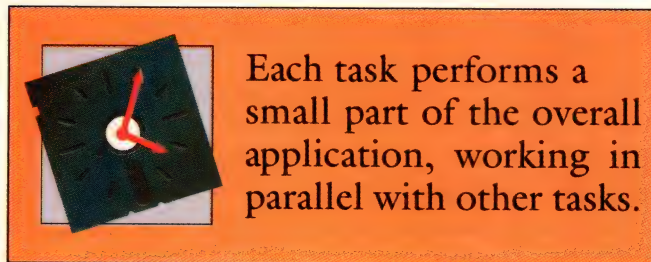

Any task can wait for an AND or OR combination of the bits within a given group. If an AND combination is specified, *all* of the selected bits must be set before the task continues; if an OR combination is specified, the task continues when *any* of the selected bits is set.

When a bit is set, all tasks whose AND or OR conditions are now satisfied become unblocked simultaneously. The task that sets a bit need not know the specific identities of the tasks that will use the information. Correspondingly, the task that uses the information does not have to know which task or tasks supply it. Thus, event flags are a mechanism for disseminating information to any or all tasks that may wish to know it.

Event flag bits remain at the last value supplied by a set or reset service call. The act of continuing a task that has been waiting for an event flag to be set does not automatically reset the bit. In other words, event flag bits are not "consumed" by being used for coordination. Fig 2 lists event flag services; the primary discussion will appear in Part 7 of this series.

Semaphores and controlled shared variables

Tasks often share groups of alterable data, such as a set of variables that is maintained jointly by two tasks, A and B. While A is working on the data, B must not be allowed to alter any of the variables, and vice versa.

Semaphores are a traditional means to protect shared, alterable data. A task creates a semaphore for a given set of data. Thereafter, every task that needs access to the data first requests the OS to block it until the semaphore is free. If the semaphore is already free, the task continues; otherwise the task waits. Waiting for the semaphore is equivalent to waiting until no other task has access to the same data. When the task that has the semaphore is finished with the

variables, it asks the OS to release the semaphore. If any tasks are waiting at that point, the most urgent one is then permitted to continue. If there are no tasks waiting, the semaphore is kept free until the next request for it.

Controlled shared variables (CSVs) are an extension of the simple semaphore concept. With a semaphore, a task can request only unconditional access to a given set of variables. All the OS requires is that the semaphore be free; the variables themselves do not have to satisfy any particular condition. With CSVs, a task can request that the exclusive access not occur until a specified relation between the variables is true. Thus, a task could stipulate that it needs exclusive access to the windows data for the system console, but only when a window of a given size is available. This extension avoids the inefficient task-level polling of the variables that would otherwise be required. Fig 3 lists semaphore and CSV services; the primary discussion will appear in Part 9 of this series.

Message exchanges

Message exchanges facilitate communication among tasks. Any task can create a message exchange. Thereafter, any task can send a message to the exchange, and any task can receive a message from it. A message is queued at the exchange if no receiver is immediately available to take it. Directing messages to a separate

crefg	Create group of (global) event flags.
srscfg	Immediately set or reset event flags.
srslcf	Immediately set or reset local event flags of given task.
sgiefg	Set event flags after given interval of time.
waiefg	Wait until event flags are set.
dlefg	Delete a group of (global) event flags.

Fig 2—Event flags broadcast information that is useful for task coordination.

Semaphores	
crsem	Create (counting) semaphore.
walsem	Wait for given (counting) semaphore to be free.
rlsem	Release semaphore.
dlsem	Delete semaphore.
Controlled Shared Variables	
crcsv	Create group of controlled shared variables.
uscscv	Wait for exclusive control over group of controlled shared variables.
waicsv	Wait for function of controlled shared variables to be true.
rlscsv	Release group of controlled shared variables.
dlscsv	Delete group of controlled shared variables.

Fig 3—Semaphores and controlled shared variables keep tasks from improperly altering shared data.

communication object (the exchange) makes it possible for multiple tasks to respond to messages held in a common queue. This design was inspired by the single line at a bank with several tellers.

MTOS-UX provides two different implementations of a message exchange. The first is called a mailbox. For this class of exchanges, there is no limit to the size of a message and no limit to the number of messages that can be queued awaiting a receiver. Both sender and receiver have full coordination capability, so that the sender can wait for the receiver and vice versa.

The second implementation is called a message buffer. It restricts messages to the size of an address (since the message is typically a pointer to a block of parameters or text). Each buffer has a finite capacity that is specified when the buffer is created. There are only two levels of urgency, equivalent to first-in, first-out and last-in, first-out queuing. The sender always deposits a message without coordination. If there is no message available, the receiver has only two coordination options: to return immediately without a message or to wait without limit for a message. Building in these fixed options—which are the ones most commonly selected when full coordination is available—makes the exchange services extremely fast. Fig 4 lists message exchange services; the primary discussion will appear in Part 8 of this series.

Input/output

Input, output, and related functions provide a mechanism for communication between a task and the external world. This communication may be performed at the physical or logical level.

At the physical level, a task selects a particular device—a certain console, printer, disk drive, and so on—and performs a fully specified operation on that device. A typical function is to write a given block of text to a console or to read a given sector from a disk into a given input buffer. Once a task requests such a service, the OS performs all the details of the physical transfer, including handling any interrupts generated by the device.

Input and output can also be performed at the logical level via a file system. In this case, the task specifies a file, a function, and the associated input buffer or output data. The file system (not the task) determines the placement of the data on the disk. Fig 5 lists physical I/O services.

Signals

A signal is a software interrupt that may be handled at the task level. Since a task can send a signal to

Mailboxes	
opnmbx	Open mailbox, creating it if it does not already exist.
sndmbx	Send message to mailbox.
rcvmbx	Receive first available message from mailbox.
clsmbx	Close mailbox.
dlmbx	Delete mailbox.
Message Buffers	
crmsb	Create message buffer.
getmsb	Get identifier of message buffer.
putmsb	Post message to the beginning of buffer.
putmse	Post message to the end of buffer.
getmsn	Get message from buffer. Return if message is not available.
getmsw	Get message from buffer. Wait if message is not available.
dlmsb	Delete message buffer.

Fig 4—Mailboxes and message buffers facilitate communications among tasks.

another task, or to a group of tasks, signals are a means of intertask coordination or communication. A task may also elect to have a signal sent to itself upon completion of a requested service. Thus, signals are also a means of deferred coordination, an alternative to event flags. MTOS-UX defines 32 signals of which 17 are available for coordination or communication. The remaining 15 are dedicated to error recovery.

Each task selects its own response to the arrival of a signal. A common response is to execute a given task-level procedure and then return to the point of interruption. Other possibilities are: (1) to ignore the signal, (2) to terminate the receiving task, or (3) to halt the task and invoke the debugger to restart it. A task can determine its current responses and can alter them dynamically.

A task can pause until a signal arrives. It can also ask the OS to send a signal to itself or to another task after a given interval. Signal-handling capability is an inherent property of a task and need not be created. Fig 6 lists signal services; the primary discussion will appear in Part 10 of this series.

Time and time of day


A task can pause for a given interval of time. During that time, the task is blocked from executing. The

Peripheral I/O	
crpun	Create peripheral unit to run under given driver.
getstc	Get identifier of standard console for requesting task.
setstc	Install given unit as standard console of requesting task.
getuid	Get identifier of unit with given key.
pio	Perform I/O and related functions on given peripheral unit.
System	
getidn	Get system identification data.

Fig 5—I/O functions provide communication between tasks and the external world.

pause can be canceled by another task that wants the task to resume immediately. To strengthen the use of pause/cancel-pause as a means of coordination, the original pause can be "forever."

Any task can submit an ASCII clock/calendar string to the OS. Thereafter, the OS will update the string

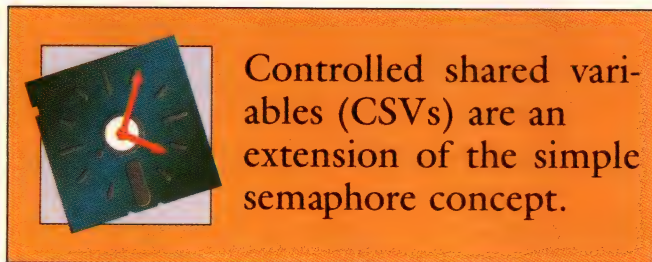

every second. Any task can receive the current value of the string. A task can also pause until a given time of day. This can be a definite time, such as 12 noon, or an indefinite time, such as 30 minutes after the hour.

Various services have time-dependent options. For example, if requested to do so, the OS will set a given event flag after a specified interval or will send a given signal to a particular task after a specified interval. The option of limiting the wait for a service to a maximum interval has already been mentioned. So has the service that automatically restarts a periodic task. Fig 7 lists time and time-of-day services; the primary discussion will appear in Part 6 of this series.

Shared-memory management

It is quite common for the sum of the maximum memory requirements of each individual task to far exceed the instantaneous needs of all the tasks taken together. For example, each of 20 tasks might need 10k bytes of work space at some time during their execution (for a theoretical worst-case total of 200k bytes). Yet, because of the way the memory needs are phased among the tasks, only 50k bytes are needed at any given time. These observations have led to the concept of memory sharing via pools.

A pool is a contiguous chunk of memory that is turned over to the OS to be allocated to individual tasks upon demand. The memory within each pool is divided into blocks of fixed size. MTOS-UX provides two types of pools. In one, a fixed-block pool, each allocation delivers exactly one block. In the other, a common memory pool, a task can receive a contiguous area of any desired size even if it spans several blocks.

With either type of pool, a task that seeks an allocation of memory that is currently not available is given the opportunity to wait until the request can be satisfied. All coordination options are available, including

limiting the wait and deferring the coordination. Fig 8 lists memory-pool services.

Invoking task services

In a traditional programming environment, OS services are requested via a procedure call. Consider the following C program, which outputs a message to the system console via a built-in service function.

```
inient ()
{
    ...
    printf ("Application started\n\r");
    ...
}
```

This program could be run under Unix, MS-DOS, or VMS. It also runs under MTOS-UX. In each case, the task need not be concerned with the details of how a given string is physically output. Physical I/O is the operating system's job.

MTOS-UX provides an implementation of the C formatted output function (*printf*), the character-oriented I/O functions (*getchar* and *putchar*), and some memory-allocation services (such as *malloc* and *free*). In these cases, the functions are completely specified in Kernighan and Ritchie (see Part 1 of this series, [Ref 2](#)).

Following this model, all OS services are requested

getsig	Get response to given signal.
setsig	Set response to one or more signals.
sndsig	Send signal to one task or group of tasks.
cansig	Cancel pending signals of requesting task.
sgsig	Send specified signal after given interval of time.
pausig	Pause until signal arrives.

Fig 6—Signal-handling functions allow task-level handling of software interrupts.

Time	
pause	Pause for given time interval.
canpau	Continue given task if it is paused for time interval.
getime	Get number of milliseconds since system was started.
Time of Day	
gettod	Get time of day clock/calendar string.
settod	Set time of day clock/calendar.
syntod	Wait for given time of day.

Fig 7—Time and time-of-day functions help with scheduling program actions.

by calling a corresponding service function, with options selected via call arguments. For example, function *pause* blocks a task for a specified interval. A 10-msec pause is requested by *pause* (MS+10), while *pause* (SEC+9) blocks for 9 sec. (A header file, MTOSUX.H, supplies the numeric value of literals such as MS and SEC.) The following program demonstrates the natural way in which standard C and proprietary OS functions are intermixed in a typical task.

```
#include "MTOSUX.H"      /* file of basic OS definitions */

inient ()
{
    register long int time;

    do
    {
        printf("\n\rEnter 1-9. Bell sounds after that many seconds: ");
        time = getchar ();          /* get users response */
        putchar (time);             /* echo back */
        time -= '0';                 /* convert to binary */
    }
    while ((time < 1) || (time > 9));
    pause (SEC+time);               /* pause for given interval */
    printf ("\07\n\rPause over.\n\r");
}
```

Typical OS services: manipulating task priority

Looking at task priority will further illustrate how a task invokes OS services. The OS employs the task attribute *current priority* to allocate any shared resource for which demand exceeds supply. The range of the current priority is 0 to 255, with 255 being the most urgent and 0 being the least urgent. The allocation algorithm is simply that the highest-priority task gets the resource. First-come, first-served applies in case of equality. The resources include access to processors, peripheral units, allocated memory, messages, semaphores, and controlled shared variables.

There is no limit to the number of tasks at each level. At one extreme, all tasks may have the same priority; at the other extreme, all have different priorities.

The current priority is dynamic. A task may ask to have its priority changed to a given value, say, 125, via

```
#define mine 0L

setpty (mine, USEVAL, 125L);
```

A value of 0 (*mine*) within the first argument specifies that the priority of the caller is to be changed. (By supplying the identifier of a task in place of the 0, *setpty* can be used to change the priority of another task, but that is getting ahead of the story.) The prior-

Common Memory Pools

crcmp	Create common memory pool.
getcmp	Get identifier of common memory pool.
alloc	Allocate contiguous area from common memory pool.
dalloc	Deallocate area taken from common memory pool.
dlcmp	Delete common memory pool.

Fixed Block Memory Pools

crfbp	Create fixed block memory pool.
getfbp	Get identifier of fixed block memory pool.
alofbp	Allocate one block from fixed block memory pool.
dalofbp	Deallocate block taken from fixed block memory pool.
dlfbp	Delete fixed block memory pool.

Fig 8—Memory-allocation functions allow tasks to share a common memory pool.

ity may also be increased by a given amount (with a clamp at 255),

```
setpty (mine, ADDVAL, 10L);
```

or decreased by a given amount (with a clamp at 0).

```
setpty (mine, ADDVAL, -10L);
```

Almost all service procedures return a value to the requesting task. If one of the parameters is inappropriate, the function returns the value BADPRM (which is defined in MTOSUX.H as -1). If the parameters are correct, *setpty* returns the new value of the task priority, as an unsigned short integer. Thus, a task can determine its current priority by adding a 0 to its priority.

```
mypty = setpty (mine, ADDVAL, 0L);
```

Changing priority in alternate OSs

To be concrete, all of the preceding examples were drawn from the same OS. Nevertheless, they illustrate the almost universal techniques for obtaining services from a real-time OS. Note the similarity with the service to set priority within the proposed Microprocessor Operating System Interface (MOSI) standard (MOSI87, Sections 7.3 and E.7.2 (C binding)),


```
void oschpri (process_id, new_priority, &error);
```

where *process_id* selects the target task (process) and *new_priority* is the new priority value. A value of -1 for the latter indicates the default priority, and a value of 0 provides the largest allowable priority for that task. The meaning of other values is implementation dependent. The function does not return a value (is "void").

A corresponding function appears in the standard proposed by the IEEE (Realtime Extension for Portable Operating Systems (POS88, Unapproved Draft 2, Section 4.2.1)).

```
int rt_setpriority (pid, prio);
```

Here *pid* selects the target task, with 0 designating the caller, and *prio* is the new priority value. The new priority value is bound to a range associated with the current scheduling policy for the system. Negative values are specifically forbidden. The exact semantics of *rt_setpriority* are implementation dependent, includ-



There are so many conflicting universal standards that there is no universal standard.

ing questions of appropriate privilege to change the priority of another task. Upon success, the function returns the former priority of the selected task.

There are even more OS "standards" that have been proposed or are still being developed. In addition to the efforts mentioned above, the VMEbus International Trade Association (VITA) is standardizing on the Open Real-Time Kernel Interface Definition (ORKID), Motorola is offering to make its Real-Time Executive Interface Definition (RTEID) a universal standard, and the Japanese are promoting The Real-Time Operating System Nucleus (TRON) as a world standard.

While the main point of this discussion is to show how services are obtained from an OS, the painful lack of agreement on even a simple service becomes apparent. There are so many conflicting universal standards that there is no universal standard. Furthermore, in many cases vital semantic details of the standard service functions are "implementation dependent." Thus, these standards are not even fulfilling their goal of promoting portability of real-time applications. An application behaves differently with different implementations of even the same standard.

The next program provides further examples of how OS services are invoked and shows how two tasks may cooperate to attain a single goal. That goal is the measurement of the idle time within an application.

```
#include "MTOSUX.H"

#define MAXTLY 2189460; /* maximum value of tally for no tasks
                           running */

static long tally;      /* number of loops performed in
                           sample period */

smpent ()               /* sampling task: */
{                       /* this must be the only task at
                           priority 0 */

    while (1)
        ++tally;        /* increment tally, which is reset by
                           reporting task */

}

prtent ()              /* reporting task */
{                       /* this must be the only task at
                           priority 255 */

    register long pcidle; /* percent idle */

    while (1)
    {
        tally = 0;      /* clear tally, which is incremented
                           by sampling task */
        pause (1+SEC);  /* pause during sampling period */
        pcidle = 100*tally/MAXTLY; /* compute percent idle */
        printf ("Percent idle = %ld\n", pcidle);
    }

}
```

The OS attempts to keep the processor busy all the time. Some processor time must be spent performing requested services, handling clock and peripheral interrupts, and doing similar housekeeping chores. All remaining time is potentially available for task work.

Companion disk offer

You can run all of the C examples in this series, plus applications of your own, on a PC computer with a set of demonstration disks available from Industrial Programming Inc. The disks contain a version of MTOS-UX for an IBM PC/AT or compatible. An application program is edited, compiled, linked, and loaded under MS-DOS. The MTOS-UX then takes over the hardware to

execute the program in real time. At any time, you can enter an alt/dlt command to return control to MS-DOS.

The demonstrator requires an AT with a least 512k bytes of RAM and a hard disk with 2M bytes available for MTOS libraries and scratch storage. Program preparation requires the Microsoft C compiler/linker, version 5.0 or later. Microsoft tools are not

included with the MTOS-UX demonstrator.

The demonstration version has all of the features and facilities of standard MTOS-UX. However, there is a limit of six of each type (six tasks, six mailboxes, six semaphores, and so forth). The disk set costs \$25; unlimited versions are also available. For more details, call the IPI sales department at (800) 365-6867.

As long as there is any Ready task, the OS will let it execute. The processor falls idle only if all tasks are Blocked or Dormant.

We know that tasks always run in priority order. As a result, we can use a pair of tasks to measure the fraction of the potential task time that is unused during a sample period of, say, 1 sec. The sampling task (*smpent*) runs at the lowest priority and must be the only task at priority 0. It is always Ready. Because of its low priority, it runs only when there is no other Ready task. The sampling task just sits in a loop, incrementing a static variable, *tally*.

A second task (*prtent*) calculates and reports the results. This task runs at the highest priority level, 255. First it clears *tally* to 0, and then it pauses for the sampling period of 1 sec. At the end of the pause, it computes the percentage idle time as 100 times the actual value of *tally* divided by the maximum possible value, *MAXTLY*. *MAXTLY* is previously determined by noting the value of *tally* when no other tasks are permitted to be Ready during the sampling period. In this example, the percent idle time is reported directly; in practice, the values could be smoothed by numerical averaging before being reported.

To sum up, a real-time program consists of a set of parallel threads of execution (tasks) that are subject to random interruptions and preemptions. The conse-

quences of such an organization must be constantly in the mind of the application programmer.

At times, the individual threads of execution must also be connected so they can cooperate to accomplish a common goal using common data, resources, and equipment. The OS provides the required coordination and communication services. The OS also permits the tasks to exercise control over their own execution and that of their fellow tasks. A task requests an OS service via a set of predefined functions. These are modeled after standard functions, such as C's *printf*. All high-level languages have equivalent function-calling facilities.

The major thrust of this series of articles is how to write a real-time program. But, before you can write a program, you must know what that program is supposed to do. Part 3 will discuss the development of real-time requirements as a first step toward program development.

EDN

Reference

1. Gleick, J, *Chaos*, Penguin Books, New York, 1987.

Article Interest Quotient (Circle One)
High 476 Medium 477 Low 478



ARIES®
ELECTRONICS, INC.

P.O. Box 130
Frenchtown, NJ 08825
Phone (908) 996-6841
Telex 6974615
FAX 908-996-3891

Headers, Sockets, Jumpers, DIP Switches, .025 Sq. Stix, etc.

SINGLE ROW COLLET PIN SOCKETS

For mounting odd centered components, jumpers, etc.

PIN-LINE 90° VERTISOCKETS® SERIES 0517

- Pins on .100 centers (end-to-end buttable).
- 2 to 25 positions.
- Breakable to any desired number of positions.

Both Pin Line Vertisockets and Pin Line Sockets are breakable to any desired no. of positions.

PIN-LINE SOCKETS SERIES 0513 (Solder tail) or 0503 (Wire Wrap)

- Pins on .100 centers (end-to-end or side-by-side buttable).
- 2 to 25 positions.
- Solder tail or wire wrap pin lengths.
- Breakable to any desired number of positions.

See EEM Vol. C pgs. 1272-1280 & Vol. A pg. 1733

CIRCLE NO. 4



A POWERFUL STATEMENT

Full Line of DC/DC Converters and AC/DC Power Supplies

- Narrow and Wide Range Inputs from 4 to 400 VDC
- AC Inputs from 90 to 270 VAC
- Switching and Linear Designs
- Encapsulated
- Outputs from 2 to 3000 VDC
- Outputs: Single, Dual or Triple; Isolated or Non-Isolated; Regulated or Unregulated
- Low Profile, PC Board Mountable

Since 1960: a Power in the Industry

WALL®


Wall Industries, Inc.

5 Watson Brook Rd. • Exeter, NH 03833

800-321-WALL
or 603-778-2300
Fax: 603-778-9797

CIRCLE NO. 7

ISS. We've driven a stake through the DRC vampire

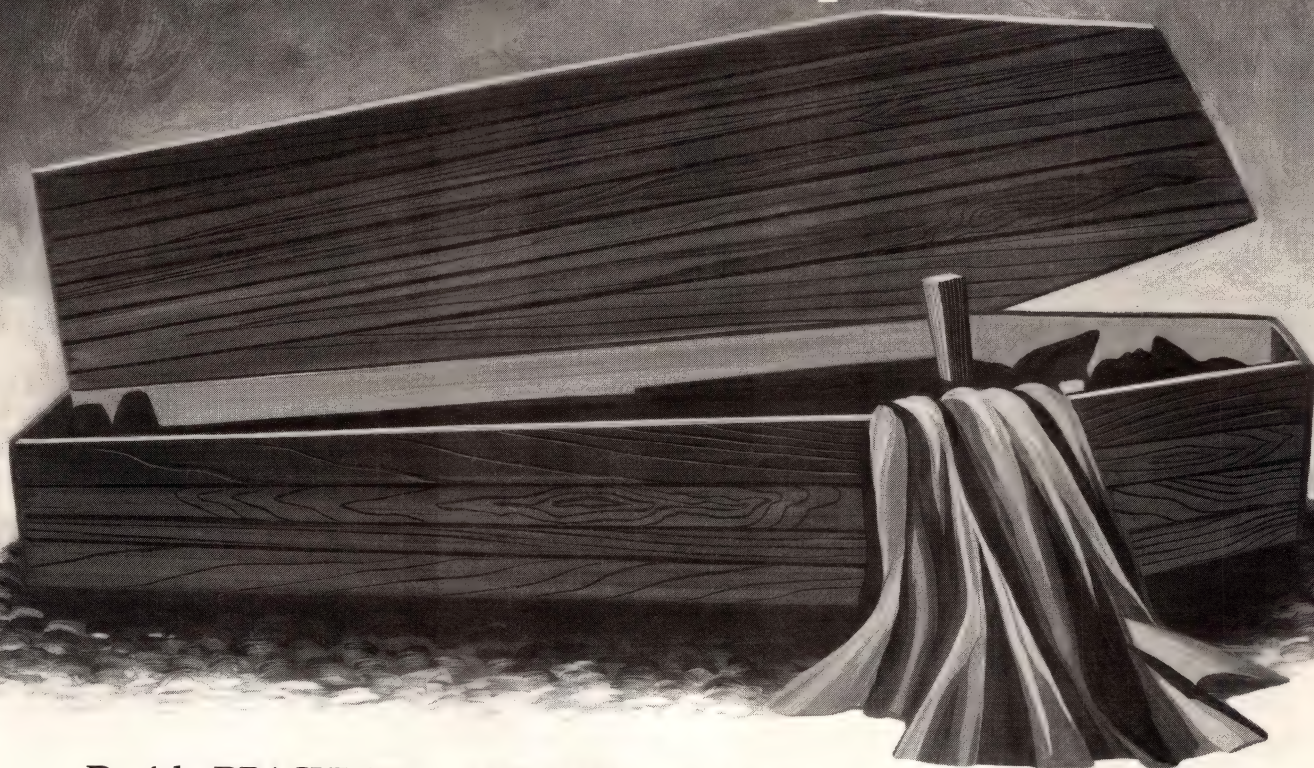

Don't let DRACULA™ hypnotize you into a dark corner. Before you choose a design rules checker, let ISS shed some light on the subject. We have DRC software in our design toolkit that's worth evaluating...

It's called LRC-2000™, and it's a true hierarchical design rules checker.

LRC-2000 is much faster than the vampire. And we pack it with more functionality—like reduced false errors, parallel processing, and a one-for-one conversion of DRACULA run sets.

With all these improvements over the DRC vampire, you might think our DRC costs more. The truth is you can buy ISS's DRC

package for much less. We won't bleed you dry.

So why not exorcise *your* vampire and try ISS's LRC-2000 free for 30 days. Install it on the workstation of your choice, or visit one of our sales offices for a demonstration.

You'll feel alive again! Call us toll free at—

1-800-4-CAD-LTL


ISS *Integrated Silicon Systems, Inc.*
ISS. The IC CAD company that listens.



CIRCLE NO. 72


P.O. Box 13665, Research Triangle Park, NC 27709 Phone: 919/361-5814 Fax: 361-2019
Silicon Valley: 408/562-6154 S. California: 714/891-0203 Texas: 512/452-5814

DRACULA is a registered trademark of Cadence Design Systems, Inc.

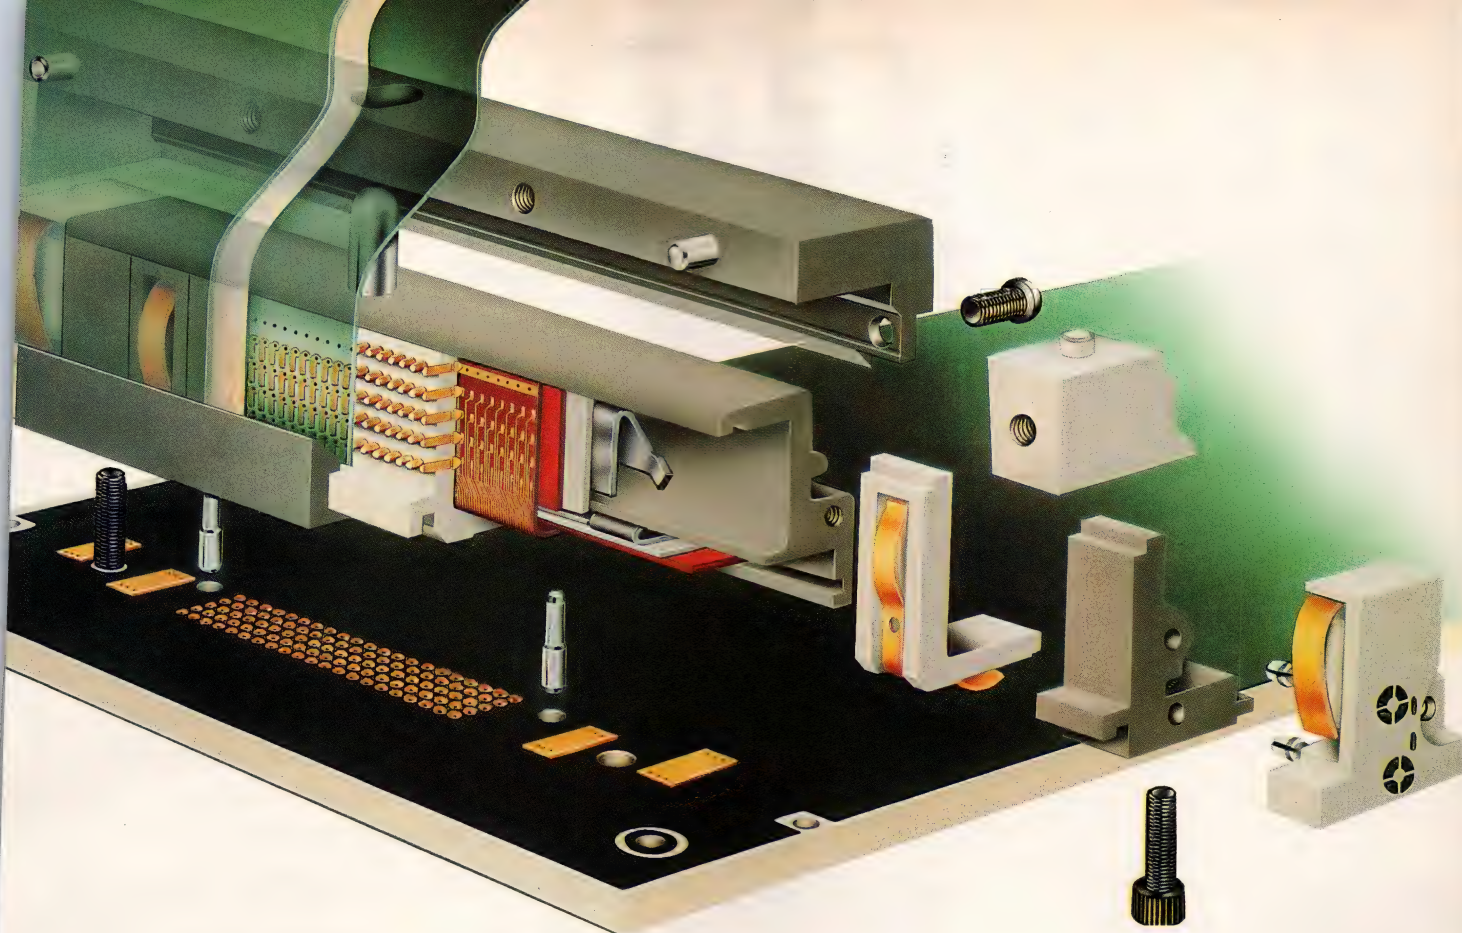

Out of sight performance!

Introducing the Electronically Invisible Interconnect: transparent to high frequency signals, therefore eliminating connector induced signal distortion. Until now, the limiting factor for signal integrity in high speed electronic circuits has been the connector. The source may be matched to the load, but an impedance mismatch at the connector degrades performance. Signal integrity

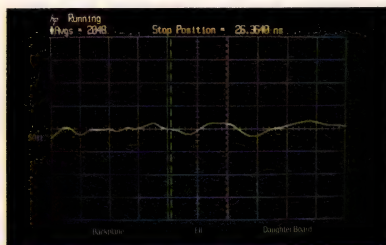

EII achieves matched impedance of the connector to the backplane and daughter card.

through EII is maintained because reflection, crosstalk, attenuation, signal skew, and rise-time degradation are reduced to absolute minimums.

This unprecedented performance is made possible by a unique flexible microstrip transmission line structure with a continuous ground-plane as the major signal path through the Electronically Invisible Interconnect. Augat, the company known for

quality and innovation, is now setting a new standard of performance – the Electronically Invisible Interconnect. Outta' sight!

AUGAT® *Quality and Innovation*

Augat Inc., Interconnection Products Division

33 Perry Ave., P.O. Box 779,
Attleboro, MA 02703
(508) 222-2202
FAX: (508) 222-0693



Emulation power without compromise



EZ-Pro™ 1.5 price performance leader for 8-bit in-circuit emulation.

Power in selection—System support for more processors than any other manufacturer in the world. Power in product range to match your needs—from economical basic configurations to fully featured systems.

Power in performance—Completely integrated capabilities include options such as versatile trace, performance analysis, EPROM programming, C source level debugging, over 100 personality modules with a common universal platform for different processors, C cross compilers, cross assemblers and more.

Power without compromise—All invented here. Supported here. And available to rent or purchase now.

Free Demo Disk!

See how easily you can use these sophisticated development tools. Our marketing department will ship your demo disk today. Please Call:

(714) 731-1661



EZ-Pro 2.1 industry workhorse for 16-bit and 8-bit designs.



**american
automation**

Headquarters: 2651 Dow Avenue, Tustin, California 92680-7207
Telephone (714) 731-1661. **European Headquarters:** UK Oxford 993 778991. **Distributors:** Australia 3-5601011, Belgium 2-4681400, France 1-69308050, India 418387, Indonesia 22-71880, Italy 2-50722282, Korea 2-7849942, Spain 1-7291155, Switzerland 1-4354111, Taiwan 2-7368150, West Germany 89-6127087.

DESIGN IDEAS

EDITED BY CHARLES H SMALL

Scrambler disguises voice signals

Francesco Ruggiero
Consultant, Dallas, TX

The simple digital circuit in **Fig 1** incarnates a well-known audio-scrambling algorithm. Briefly, the scrambling begins with digitizing a bandlimited audio signal. Next, every other digital sample's sign bit gets complemented. When reconstructed, this scrambled signal contains the original signal's spectrum flipped around one-fourth of the sampling frequency. The resulting signal will be unintelligible.

Thus, for a signal bandlimited to 4 kHz and sampled at 8 kHz, the resulting spectrum will be flipped around

2 kHz, effectively interchanging the high and low portion of the audio spectrum. But, passing the scrambled signal back through the scrambler again restores the signal to its original form. In other words, the process is its own inverse.

The circuit's XOR gate complements every other sign bit while the TP3054 codec/filter combo handles the digitizing and reconstruction chores. To curtail distortion, limit the input level to 2.5V.

(EDN BBS DI #891)

EDN

To Vote For This Design, Circle No. 746

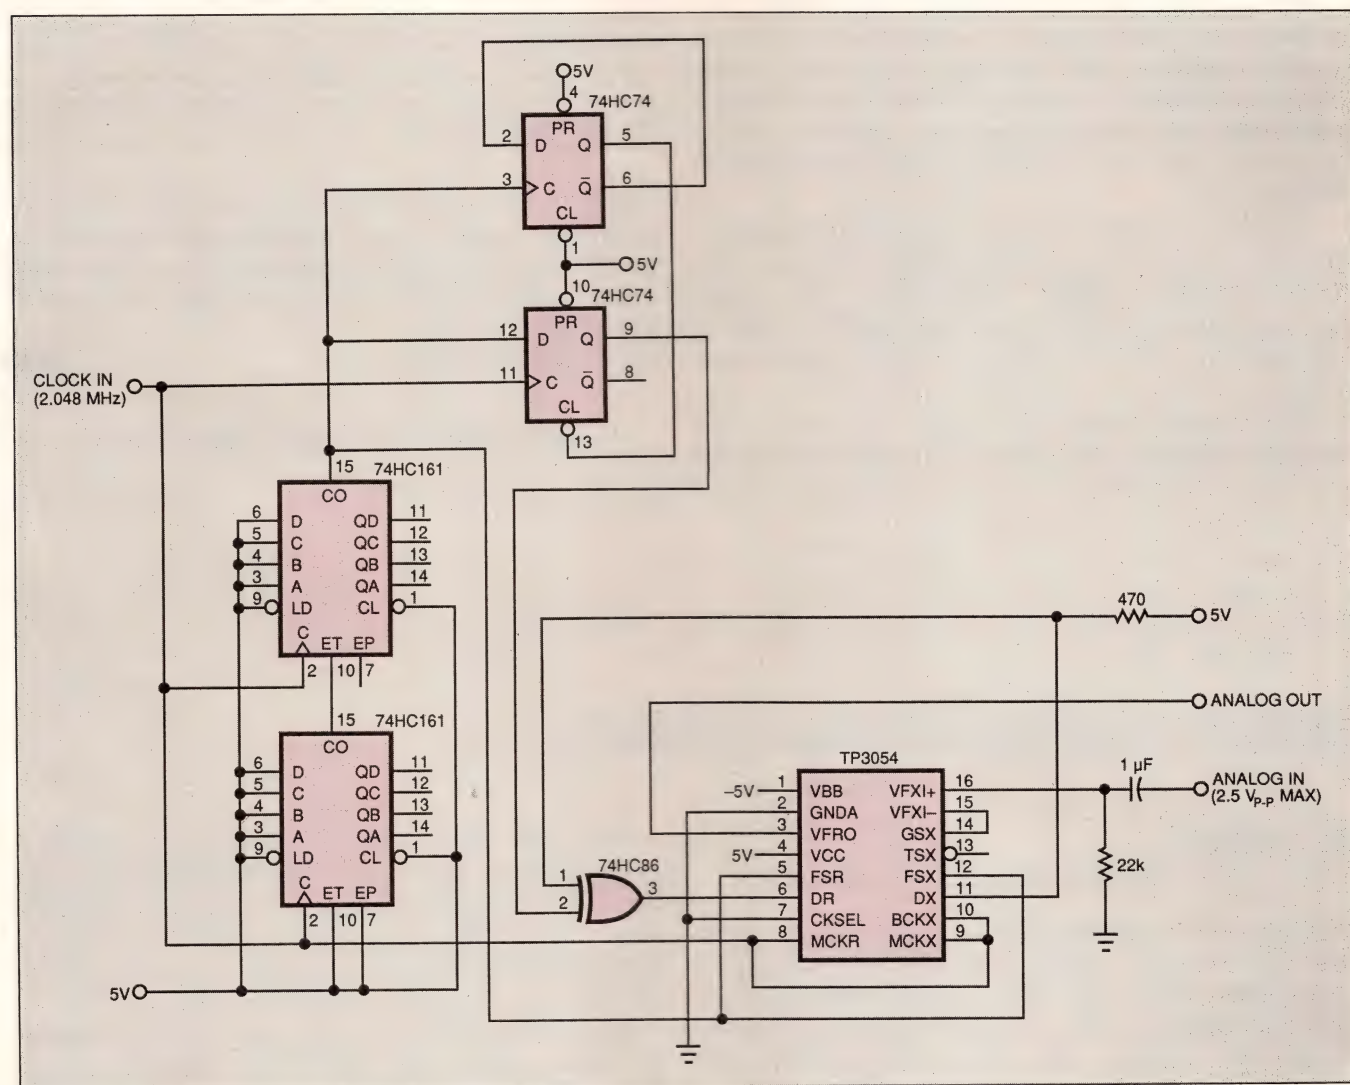


Fig 1—This circuit can both scramble and unscramble an audio signal.

S/H circuit multiplexes op amp

Tarleton Fleming
Maxim Integrated Products, Sunnyvale, CA

The sample-and-hold (S/H) circuit in Fig 1 costs only \$3.50 (1000) because it switches its single op amp between two functions. The op amp buffers the input (V_{IN}) while the circuit is in sample mode and buffers the hold capacitor, C_H , while the circuit is in hold mode.

The two digital inputs are compatible with TTL and CMOS logic levels. Input \bar{S}/H controls the circuit's operating mode (low is sample), and $DISCH$ is an optional control input whose low state commands a rapid and complete discharge of C_H .

You can use a general-purpose op amp for IC_1 , provided its input bias current is acceptable. Bias current usually dominates the hold-mode droop rate. C_H can range from 100 pF to 0.1 μF . When driving such a capacitive load, most op amps will oscillate without an isolating resistor, such as R_1 , of 100 to 200 Ω in their feedback loops.

Typical performance with a 0.01- μF hold capacitor includes a droop rate of ≤ 100 mV/sec, aperture time of ≤ 100 nsec, an offset voltage of ≤ 5 mV, output charge injection of ≤ 5 pC, and an acquisition time of ≤ 1 μ sec (for $\pm 10\%$ accuracy) or ≤ 5 μ sec ($\pm 0.1\%$ accuracy).

Performance is about the same for ± 15 or ± 12 V supplies, and the system also works well on a unipolar

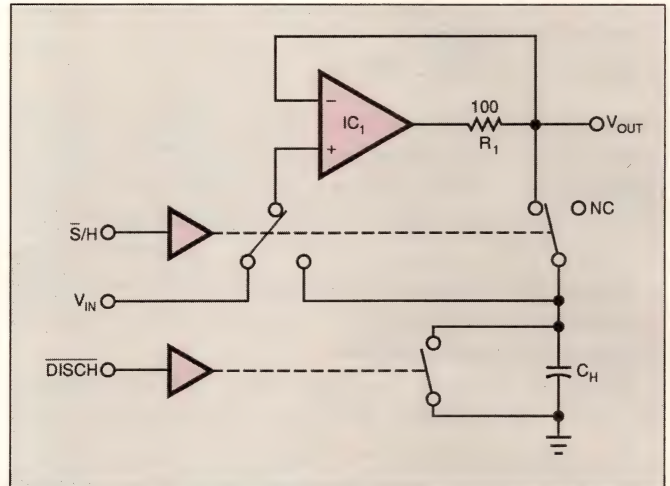


Fig 1—Elements of a quad analog switch hardware-multiplex an op amp between input and hold-capacitor buffering functions in this economical S/H circuit.

supply of 10 to 30V. Whatever the supply's configuration, the op amp's common-mode range restricts V_{IN} to about 2V less than the supply rails. The control inputs' switching thresholds remain the same regardless of supply levels.

(EDN BBS DI #888)

EDN

To Vote For This Design, Circle No. 747


8051 routine divides quickly

Ron Mowrer
Rocky Mountain Instrument, Thermopolis, WY

The program in Listing 1 speeds some division operations by taking advantage of the 8051 single-chip μP 's byte-divide instruction. This program embodies a nibble-mode algorithm and handles operations such as division by a constant. The routine in the listing will work with any number of bytes in the dividend but restricts the divisor's range to 4 bits or less.

First, the nibble divisor divides into the dividend's most-significant byte. Next, the remainder from that division (which is never greater than a nibble) combines with the next-most-significant nibble of the dividend for the next division. The algorithm repeats until the dividend is completely "nibbled" up.

The routine in the listing handles 3-byte dividends. To accommodate different-length dividends, simply change the loop counter's initial value from 2, in line 165, to one less than the total number of bytes in your

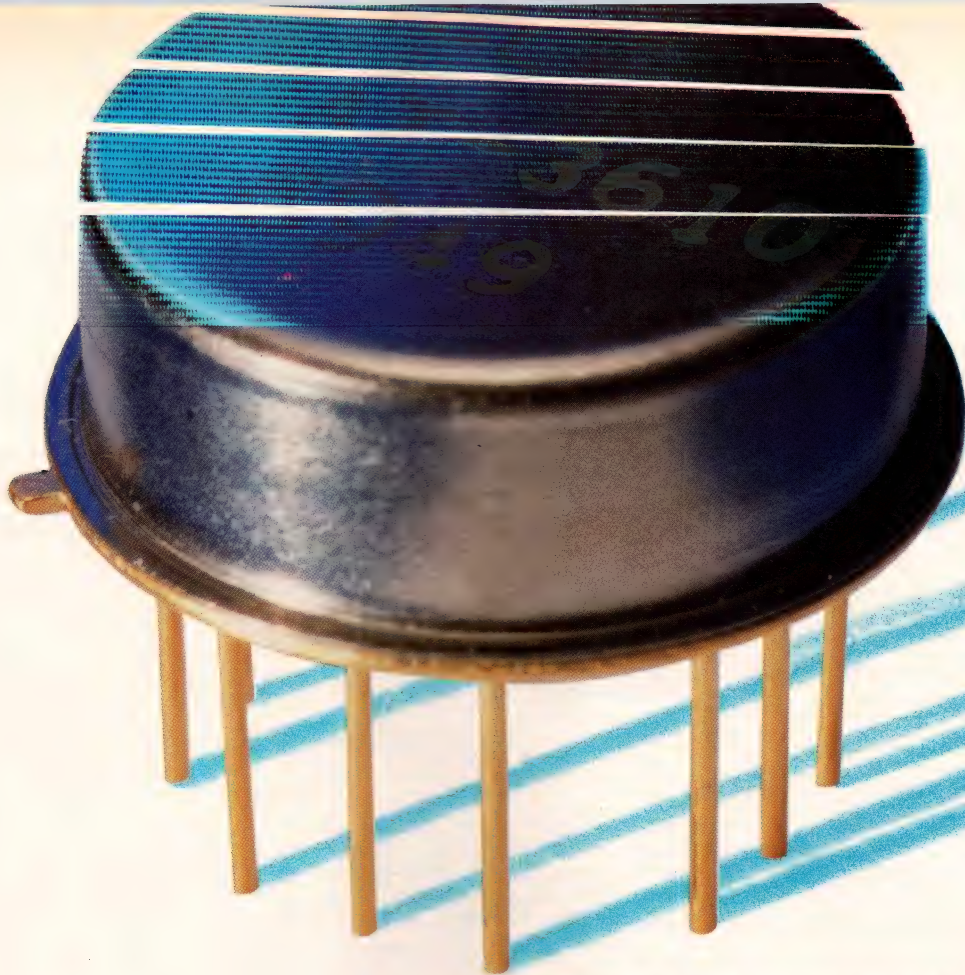


PRECISION TTL-CONTROLLED ATTENUATORS

up to 35dB
10 to 1000MHz
\$5995
only

TOAT-R512 Accuracy (dB) (+/-dB)	TOAT-124 Accuracy (dB) (+/-dB)	TOAT-3610 Accuracy (dB) (+/-dB)	TOAT-51020 Accuracy (dB) (+/-dB)
0.5 0.12	1.0 0.2	3.0 0.3	5.0 0.3
1.0 0.2	2.0 0.2	6.0 0.3	10.0 0.3
1.5 0.32	3.0 0.4	9.0 0.6	15.0 0.6
2.0 0.2	4.0 0.3	10.0 0.3	20.0 0.4
2.5 0.32	5.0 0.5	13.0 0.6	25.0 0.7
3.0 0.4	6.0 0.5	16.0 0.6	30.0 0.7
3.5 0.52	7.0 0.7	19.0 0.9	35.0 1.0

bold faced values are individual elements in the units

Now...precision TTL-controlled attenuators accurate over 10 to 1000MHz and -55 to $+100^{\circ}\text{C}$. Four models are available in the new TOAT-series, each with 3 discrete attenuators switchable to provide 7 discrete and accurate attenuation levels (see chart). Cascade all four models for up to 64.5dB control in 0.5dB steps. Custom values available on request. The 50-ohm TOAT-series performs with 6 μsec switching speed and can handle power levels up to 0dBm. Units are housed in a rugged hermetically-sealed TO-8 package to withstand the shock, vibration, and temperature stresses of MIL-STD-883. Connector versions are available. Take advantage of the \$59.95 (1-9 qty) price breakthrough to stimulate new applications as you implement present designs and plan future systems.



finding new ways ...
setting higher standards

Mini-Circuits

WE ACCEPT AMERICAN EXPRESS

CIRCLE NO. 74

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156

F 140 REV. ORIG.

DESIGN IDEAS

dividend. You can alter the routine to either load the MathPtr (line 157) and byte count directly, or have the calling routine pass these parameters to this routine.

Although ideal for such tasks as dividing by 10, the routine's speed, compared to normal division algorithms, makes it attractive for dividing by larger divisors that break down into nibble divisors. For example,

calling the routine with 5 and then 7 will equal a division by 35 (5×7) and three calls with a divisor of 5 is the same as dividing by 125 ($5 \times 5 \times 5$).

(EDN BBS DI #890)

EDN

To Vote For This Design, Circle No. 748

Listing 1—Fast nibble-mode division routine

```

001      $ INCLUDE (REG451.PDF)
=1 002 +1 $ NOLIST
136
137      PUBLIC DivNib
138      EXTRN DATA (MathPtr)
139
0010 140      MathBank      EQU      00010000B      ;PSW VALUE FOR REGISTER BANK 2
141
142      USING 2
143
144      ;-----
145      ; DIVIDE 3 BYTE BINARY NUMBER BY NIBBLE
146      ; INPUT: MathPtr = PTR TO MS BYTE OF 3 BYTE DIVIDEND/RESULT
147      ; ACC = NIBBLE DIVISOR ( 1H <= DIVISOR <= 0FH )
148      ; OUTPUT: RESULT IN SAME LOCATION AT MathPtr
149      ; ACC = REMAINDER
150      ;-----
151
152      DivNib:
0000 153          PUSH      B                      ;SAVE B & PSW REGISTERS ON STACK
0002 154          PUSH      PSW
0004 155          MOV      PSW,#MathBank      ;SWITCH TO REGISTER BANK.2
0007 156          MOV      R3,A              ;STORE NIBBLE DIVISOR
0008 157          MOV      R0,MathPtr        ;R0 NOW PTR TO MS BYTE OF DIVIDEND (& EVENTUAL RESULT)
000A 158          MOV      R1,#12H          ;R1 NOW PTR TO R2 THIS BANK SO CAN USE NIBBLE XCHD INSTRUCTION
000C 159          MOV      A,@R0            ;GET MS BYTE OF DIVIDEND
000D 160          MOV      B,R3              ;PUT NIBBLE DIVISOR IN B
000F 161          DIV      AB
0010 162          MOV      12H,B              ;MOVE REMAINDER TO R2 SO CAN USE NIBBLE EXCHANGE IN LOOP
0013 163          MOV      @R0,A              ;MS BYTE NOW DONE, STORE IN DIVIDEND/RESULT
0014 164          INC      R0                ;BUMP PTR TO NEXT MS BYTE OF DIVIDEND
0015 165          MOV      R7,#2              ;LOOP COUNTER FOR REMAINING BYTES OF DIVIDEND
166
0017 167      DN1:      MOV      A,@R0          ;GET NEXT BYTE OF DIVIDEND IN ACC (WE ONLY NEED MS NIBBLE)
0018 168          XCHD     A,@R1              ;PUT REMAINDER STORED AT R2 IN LO NIBBLE OF ACC
0019 169          SWAP     A                  ;NOW REMAINDER IS IN HI NIBBLE OF ACC & NEXT MS NIBBLE OF
170          ; DIVIDEND IS IN LO NIBBLE
171          ;DIVIDE AGAIN BY DIVISOR NIBBLE
001A 170          MOV      B,R3
001C 171          DIV      AB
001D 172          MOV      12H,B              ;AGAIN SAVE REMAINDER TO R2 THIS BANK FOR LO NIBBLE EXCHANGE
0020 173          SWAP     A                  ;PUT NIBBLE RESULT IN HI NIBBLE AND STORE IN DIVIDEND/RESULT
0021 174          XCH      A,@R0              ; WHILE RETRIEVING ORIGINAL DIVIDEND BYTE (WE ONLY NEED LS
175          ; NIBBLE)
0022 175          SWAP     A                  ;LS NIBBLE OF DIVIDEND BYTE TO HI NIBBLE OF ACC FOR XCHD
0023 176          XCHD     A,@R1              ;REMAINDER TO LO NIBBLE OF ACC
0024 177          SWAP     A                  ;SWAP REMAINDER TO HI NIBBLE FOR NEXT DIVIDE
0025 178          MOV      B,R3              ;DIVIDE AGAIN BY DIVISOR NIBBLE
0027 179          DIV      AB
0028 180          MOV      12H,B              ;AGAIN REMAINDER TO R2 THIS BANK FOR NIBBLE SWAP
002B 181          XCHD     A,@R0              ;STORE LO NIBBLE RESULT THIS BYTE IN DIVIDEND/RESULT
002C 182          INC      R0                ;BUMP PTR FOR NEXT DIVIDEND BYTE
002D 183          DJNZ     R7,DN1              ;FINAL TWO BYTES DONE?
184
002F 185          MOV      ACC,B              ;PUT NIBBLE REMAINDER FROM LAST DIVIDE IN ACC FOR CALLER
0032 186          POP      PSW                ;RESTORE REGISTERS AND SWITCH BACK TO CALLERS REGISTER BANK
0034 187          POP      B
0036 188          RET
189
190      END

```

THIS IS A BIG TIME GAL.[®]



Time is finally on your side. Our new **GAL20RA10-15**, with ten individually programmable clocks and a 15ns propagation delay, offers the world's fastest performance. A combination that delivers the ultimate in design flexibility and speed, all in a 24-pin E²CMOS[®] GAL device.

For example, design engineers can independently clock, reset and preset each of ten output logic macrocells. These individually programmable clocks enable asynchronous designs, taking your system performance to even higher levels.

If your design is ready for the big time, call **1-800-FASTGAL**, and ask for dept. 203. We'll send you free samples and a data-book describing our entire line of high speed E²CMOS GAL devices. Fast.



5555 Northeast Moore Court • Hillsboro, Oregon 97124

Leader in E²CMOS PLDs.[™]

Circle 34 for Literature.

Inverters mimic interlocked switches

Tian Jin Qin
Shanxi Electronic Industry Research Institute,
Taiyuan, China

The switching circuit in **Fig 1** acts like a bank of interlocked mechanical switches; pushing one of the buttons latches its corresponding output and unlatches any previously selected output. A pair of inverters forms a latch for each output.

Pressing button B_1 , for example, applies a positive pulse, via resistor diode D_{1B} , to the input of the first output's, OUT_1 , latch. This positive pulse will set OUT_1

high. Feedback locks OUT_1 's pair of inverters in this high state. Meanwhile, the pulse will also pass through diode D_{1A} to the differentiator formed by C and R_2 . The differentiator will shorten the pulse.

This shortened pulse goes to all the latches, resetting all of them *except* the latch that sees the longer setting pulse. Obviously, if you press more than one button at once, more than one output will latch at once.

(EDN BBS DI #889)

EDN

To Vote For This Design, Circle No. 749

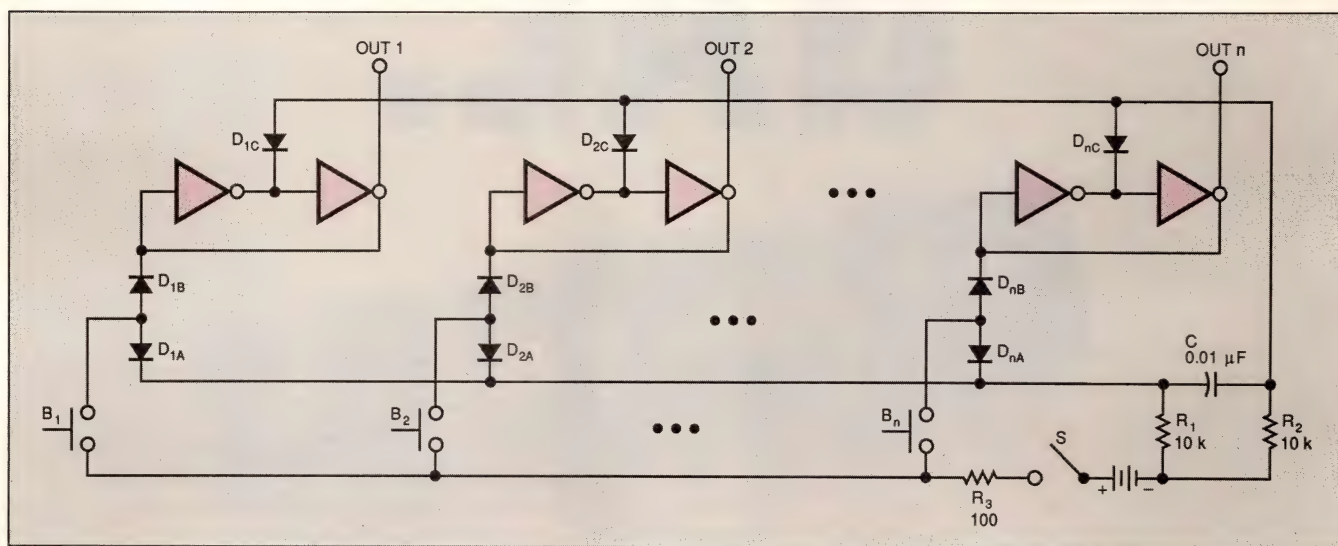


Fig 1—This pushbutton array mimics the action of an array of interlocked mechanical switches.

Micropower clock quashes spurious modes

Norm Looper
Action Instruments, San Diego, CA

Although ceramic resonators are a good choice for low-power, low-frequency clock sources (if you can stand their 30-ppm temperature coefficient), they have troublesome, spurious-resonance modes. The circuit in **Fig 1** rejects all but the resonator's fundamental mode. This clock circuit works from -40 to $+80^\circ\text{C}$ and consumes only 2.8 mW.

The rising edge of resonator Y_1 toggles IC_{1A} low. AC-coupled positive feedback from IC_{1D} via C_1 and R_1 immediately confirms this state change at IC_{1B} , so that Miller loading, harmonic components, or below-minimum rise times at IC_{1A} cannot force a relapse of IC_{1C} to its previous state. This tactic also applies to resonator Y_1 's falling edge because IC_{1C} , via C_2 and R_2 , holds IC_{1B} high.

Choose time constants R_1C_1 and R_2C_2 to be equal and ranging from 60 to 75% of one-half of the clock's



AT&T.

Nobody makes more connections.

AT&T provides all your end-to-end transmission solutions with our full line of fiber optic, copper cable and connecting components.

If your regular route just isn't getting you there, make a right turn. AT&T has the connections you need.

Like data cable, composite fiber/copper cable and optical cable and fiber. Connecting components like ST® connectors and FDDI jumpers. 110 connecting blocks. Splicing and test equipment. Plus, tactical fiber assemblies for harsh environments.

Everything you need in copper and fiber optics for the transmission of voice, data, image and remote sensing. In both network and component solutions. For present and future needs.

But when you buy even just one AT&T component, you're getting more than just a "part."

You're getting over 100 years of AT&T cable and apparatus manufacturing and development experience. Plus the design expertise of AT&T Bell Laboratories.

So take the route you know will make all your connections. AT&T. Just give us a call at 1 800 344-0223, ext. 020.

The
components
of success.



AT&T
Network Systems

DESIGN IDEAS

period. Ceramic capacitors (10% tolerance) with X7RK dielectric work well. With these time constants, the logic will be locked and unavailable to the ceramic resonator until just before it executes a legitimate transition. IC_{1D} and IC_{1C} are in parallel to isolate the resonator

from external loads and, more importantly, from C₂.
(EDN BBS DI #887) **EDN**

EDN

To Vote For This Design, Circle No. 750

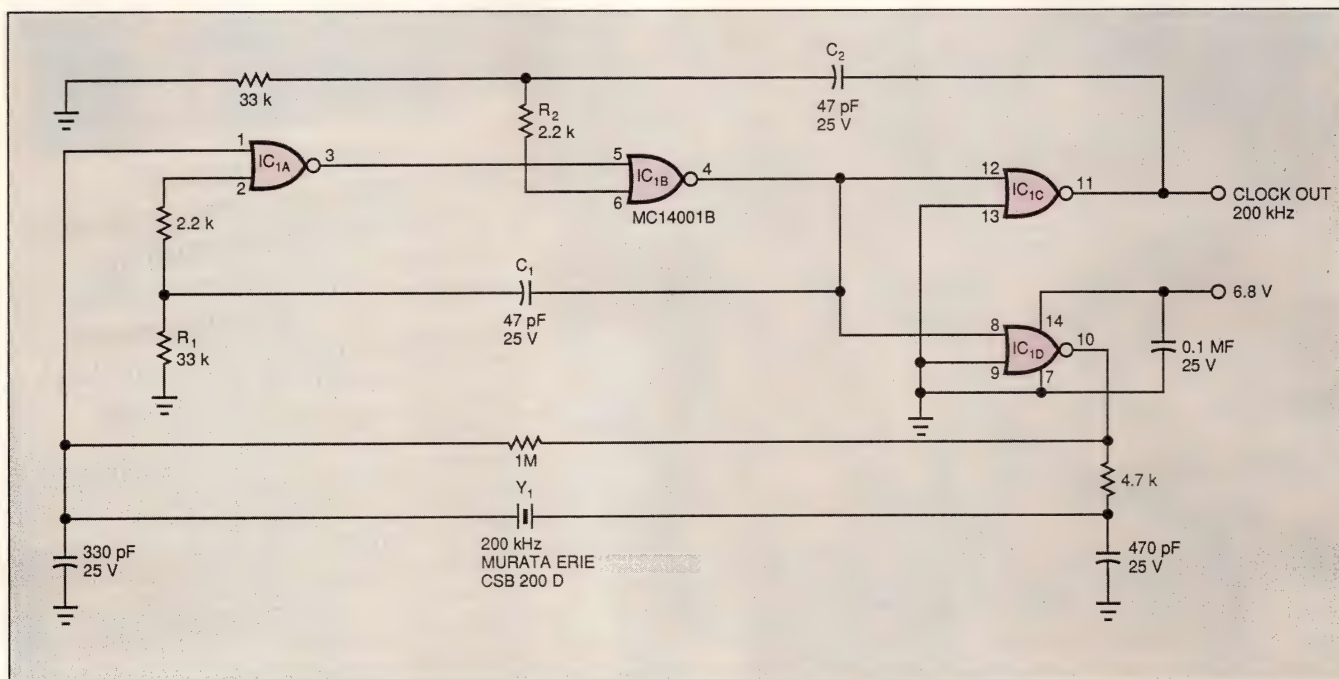


Fig 1—This clock circuit uses a ceramic resonator, Y_1 , to generate low-frequency clock signals. The circuit's logic eliminates the ceramic resonator's pesky spurious-resonance modes.

FEEDBACK AND AMPLIFICATION

EDN's bulletin board is on line—and free


EDN's computer bulletin board system (BBS), (617) 558-4241 (1200,8,N,1), has a Design Idea Special Interest Group. Where applicable, you'll find computerized material that you can download, such as program listings, circuit diagrams, and pc-board layouts posted on the bulletin board. We also want to hear from you. Please use our bulletin board to ask questions, make comments, and propose alternative solutions.

To use the BBS, first call up and log onto the system. To get to the Design Idea Special Interest Group, first select "s," the SIGs option. Next select the "s" new-SIG option and ask for a list of SIGs by entering a "?". Enter the "/DL_SIG" name. Then select the "r" read-

bulletin and "s" scan-bulletin options. You should now be able to scan the titles of available Design Ideas (DIs), optionally read an attached explanatory message, and optionally download an attached file. Note that the BBS assigns its own number to each message. You will find our DI number, along with a portion of the DI's headline, when you scan the list of bulletins. You can optionally use our DI number, or any portion of a DI's headline, to search for a particular Idea. To leave the DI editors a message, first get to the /DI_SIG, and then select the "w" write-message option.

Charles H Small and Anne Watson Swager
Design Ideas Editors

Our 680's TICK makes Motorola's 040 TOCK.

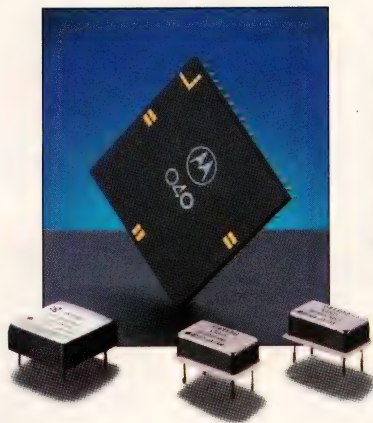

AVX/Kyocera's 680 clock oscillator is specifically designed to meet all of Motorola's strict timing requirements for their MC68040: the tight symmetry (47.5%/52.5%) for delivering 20MIPs at 25MHz, the dual outputs* of 50MHz and 25MHz to eliminate external adjustments, buffers and dividers. These plus controlled skew to ± 7.0 nsec between clocks and the ability to tolerate supply voltage variations up to $\pm 10\%$ keeps Motorola's 040 right on time.

Uncompromising precision, that's what makes

AVX/Kyocera clock oscillators "tick."

To talk about our 680, contact AVX/Kyocera today by calling (803) 448-9411, fax us at (803) 448-1943, or write to AVX/Kyocera, 17th Avenue South, P.O. 867, Myrtle Beach, SC 29577.

* Also available in single 50MHz frequency, K680S.

☐ Please send me more information on what makes the 680 tick.

NAME _____

TITLE _____

COMPANY _____

ADDRESS _____


CITY _____ STATE _____ ZIP _____

TELEPHONE _____

Send to: AVX/Kyocera, Literature Department, P.O. 867,
Myrtle Beach, SC 29577.

EDN100190



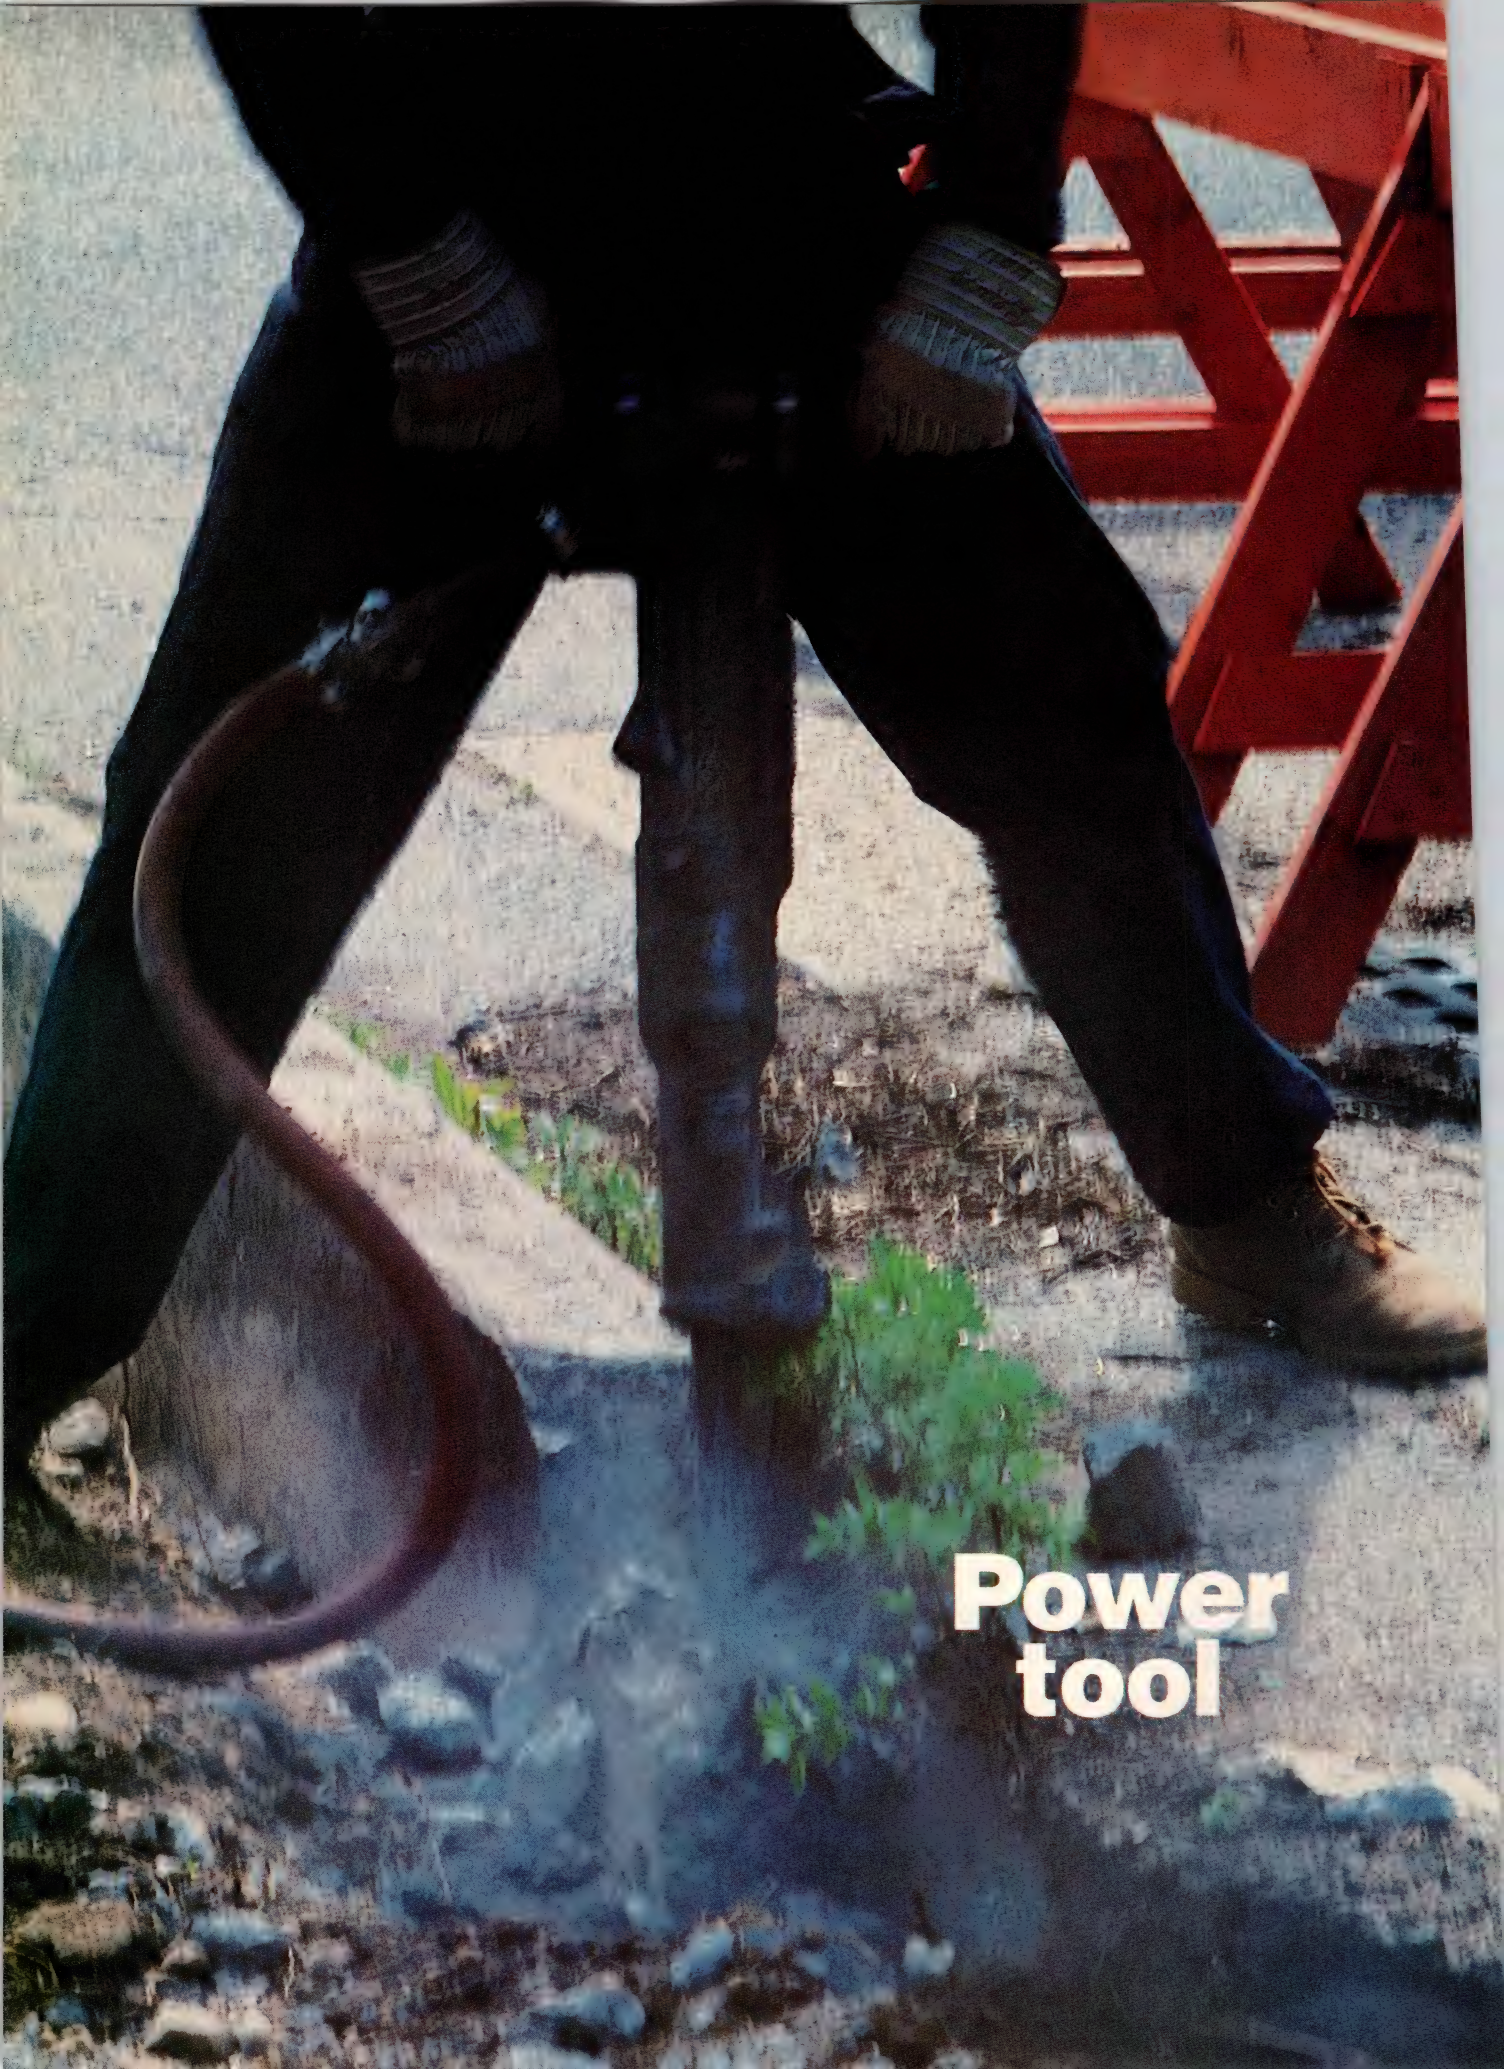

**Power
tool**

KEPCO ac-dc dc-dc SWITCHING POWER SUPPLIES

Field-proven in a broad spectrum of applications and certified by the world's safety agencies, here are versatile, rugged power tools for your design needs. Choose voltages up to 48V dc; power up to 1500W; ac or dc input. Features include active soft-start, remote voltage control, overvoltage protection, current limiting and built-in EMI filtering. The 600W and 1500W models provide for current-share paralleling. Kepco's switchers are also available in low-cost open frame and pc-card styles for OEM applications. Please request our catalog.




Power tools



ac to dc power single output 50W, 100W, 175W, 300W, 1500W

- ☐ 3V-48V dc output
- ☐ jumper selectable inputs:
85-132 or 170-264V ac,
240-370V dc
- ☐ fully enclosed
- ☐ UL/CSA/TÜV
- ☐ Tested to MIL STD 810D
- ☐ FCC Class A EMI filtering

Kepco Group RAX Power Supplies

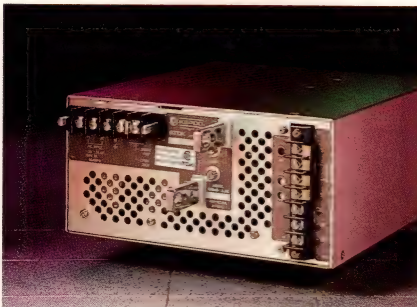

ac to dc power single output 600W

- ☐ 2V-48V dc output
- ☐ jumper selectable inputs:
85-132 or 170-264V ac, 240-370V dc
- ☐ fully enclosed
- ☐ UL/CSA
- ☐ Tested to MIL STD 810D


Kepco Group RBX Power Supplies



dc to dc power single output 30W, 60W, 150W

- ☐ 5V-48V dc output
- ☐ 24 and 48V input
(60V available on some models)
- ☐ fully enclosed
- ☐ UL/CSA
- ☐ MIL STD 461B EMI filtering
- ☐ Tested to MIL STD 810D

Kepco Group ERD Power Supplies

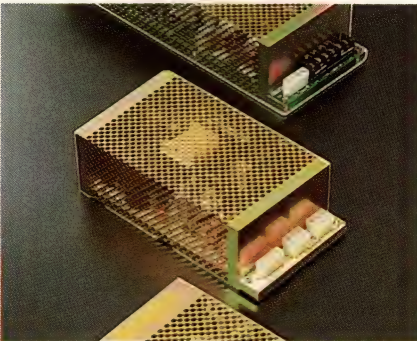

ac to dc power single output 30W, 60W, 120W, 240W

- ☐ 5V-24V dc output
- ☐ jumper selectable inputs:
85-132 or 170-264V ac, 240-370V dc
- ☐ P-C card, L-chassis, optional enclosure
- ☐ UL/CSA/TÜV
- ☐ FCC Class B EMI filtering



Kepco Group ERX Power Supplies

For your free copy of Kepco's new 56-page catalog,
"Kepco Switching Power Supplies for the '90s" (#146-1692),
call/fax/write Dept. LWT-12, Kepco, Inc., 131-38 Sanford Avenue, Flushing, NY 11352 USA
Tel: (718) 461-7000 • Fax: (718) 767-1102 • Easylink (TWX): 710-582-2631



Gold Terminals Extend TO-5 Switch Life. Gold-plated terminals, handling resistive loads of 500 mA/125 VAC, extend the life of Standard Grigsby's TO-5 rotary switch to an 5000 cycles (typ.). These compact switches mount easily into standard TO-5 transistor sockets or PC boards for wave soldering. Screwdriver or knob actuation available. 45° throw with 8 positions max. Positive detent switching action is standard. Contact pin surface is sealed and an optional boot is available to seal the shaft. Price: \$1.39 in 10,000-piece lots. Delivery: 4 weeks. Contact Standard Grigsby, Inc., 88 N. Dugan Rd., Sugar Grove, IL 60554-0890. 708/556-4200 FAX 708/556-4216.

CIRCLE NO. 78

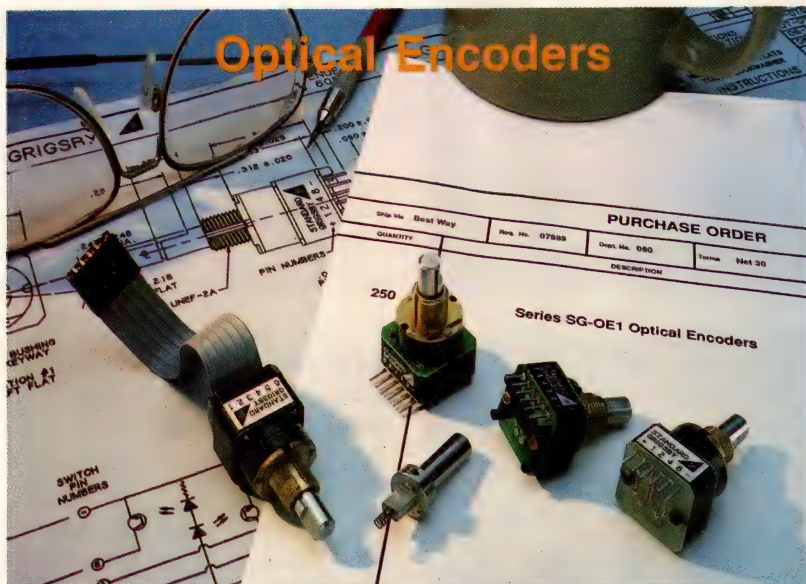

Specify THE Standard In Optical Switching... Standard Grigsby!

Quality Is Standard At Standard Grigsby...

- Vibration-resistant interlock design
- Long life
- Reliable LED optical switching source
- Low power consumption

Customer Satisfaction Is Standard, Too!

- Binary, gray, or custom codes
- High res, 128-152 position option
- Ribbon cable or connectors
- 16, 24, 32, 64 positions
- P.C. lugs and right angle mounts available
- Priced at under \$20 in lots of 100

Raise your switching standards! Call us today for our complete **Optical Encoder** product catalog. 708/556-4200


STANDARD GRIGSBY

88 N. Dugan Road/P.O. Box 890, Sugar Grove, IL 60554-0890
708/556-4200 FAX 708/556-4216

Choose Binary Or Gray Coded. Sugar Grove, IL—Binary and Gray coded optical encoders are available from Standard Grigsby, Inc. Ideal for use in robotics, medical instrumentation, communications, computer peripherals and avionics, the 16-position encoder is available with integral cable or connector. Users may specify custom shaft lengths and diameters.

Priced at \$29.10 each in 100-piece lots, the encoders are available in 6 weeks. Standard Grigsby, Inc., 88 N. Dugan Road, Sugar Grove, Illinois 60554-0890. 708/556-4200 FAX 708/556-4216.

CIRCLE NO. 99

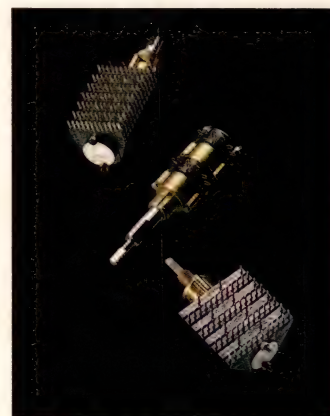

Multi-deck, Multi-options. Sugar Grove, IL—Standard Grigsby's multi-deck rotary switches offer reliability and long life, and retrofit other manufacturers. Measuring approximately 1/2" in diameter, the switches are available with PC or solder lug terminations, fixed or adjustable stops; 30° or 36° indexing angles; commercial or military finishes.

Priced at \$4.50 each in lots of 500, the switches are available in 6 to 8 weeks. For more information, contact Standard Grigsby, Inc., 88 N. Dugan Road, Sugar Grove, IL 60554-0890. 708/556-4200 FAX 708/556-4216.

CIRCLE NO. 103

NEW PRODUCTS


COMPONENTS & POWER SUPPLIES

Monolithic Pressure Sensor

- *Totally conditioned*
- *Has a 4.5V output*

The MPX5100D pressure sensor integrates a sensing element, offset calibration circuitry, temperature compensation circuitry, and signal amplification on a monolithic silicon chip. The unit has a 0 to 85°C compensated operating range and features a full-scale output that is calibrated from 0.5 to 4.5V. The device uses a patented silicon shear stress strain gauge, which measures 0- to 15-psi differential pressures. Zero pressure offset measures 0.5V and sensitivity equals 40 mV/kPa. Linearity over the full 0- to 15-psi range equals $\pm 0.2\%$ full scale. Temperature hysteresis and temperature effect on zero offset equal $\pm 0.05\%$ of full scale and ± 25 mV, respectively. The sensor is available in the basic element package, as well as in single- and dual-ported versions. Sensors with customized outputs are also available. \$45 (100). Delivery, stock to eight weeks ARO.

Motorola Inc., 5005 E McDowell Rd, Mail Drop Z201, Phoenix, AZ 85008. Phone (800) 752-3621; in AZ, (602) 244-4556. **Circle No. 363**

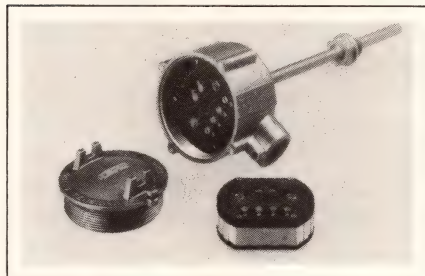

Temperature Transmitters

- *Feature $\pm 0.1\%$ accuracy*
- *Provide input/output isolation*

Models in the 84500 series of 2-wire temperature transmitters provide a 1500V I/O isolation and accept Pt100 RTD, Type K thermocouple, and Type J thermocouple inputs.

The devices have $\pm 0.1\%$ span accuracy and zero and range selection via rotary switches with 20-turn potentiometers for fine adjustment. The transmitters operate with supply voltages of 10 to 36V dc. The units feature less than $\pm 0.01\%/^{\circ}\text{C}$ zero and span drift and provide automatic upscale indication for sensor burnout. Pt100 RTD units are completely linearized and thermocouple models are voltage linear. The transmitters meet the EMI immunity standards outlined in SAMA PMC33. \$198.50.

S-Products Inc., 35 Kings Hwy E, Fairfield, CT 06430. Phone (203) 331-9546. FAX (203) 335-2723.

Circle No. 364

D-Size Backplane

- *Designed for VXIbus*
- *Will handle 350A at 5V*

This 100-MHz, D-size backplane is a 12-layer board designed to meet or exceed VXIbus Specifications Rev 1.3. All critical signal lines are matched to eliminate signal propagation skew. The design equalizes currents between all connector rows. Optional power and ground bus bars accommodate even high-current distribution, allowing the backplane to handle 350A at 5V. The unit features onboard termination and BUSGRANT and IACK jumpers between each J1 slot. ECL signals terminate at the end of the bus to minimize signal reflections. A set of onboard module-status LED indicators, controlled by slot 0, signals if a board is not plugged in or if a slot is empty. The backplane design provides a grounded area around each connector to ensure shielding integrity. \$2099 for a 13-slot unit.

Dawn VME Products, 47073 Warm Springs Blvd, Fremont, CA 94539. Phone (415) 657-4444. FAX (415) 657-3274. **Circle No. 365**

Universal-Input Supplies

- *Feature power-factor correction*
- *Provide 1000W output*

F Series power supplies feature correction circuitry that delivers a typical power factor of 0.98. Autoranging circuitry allows the supplies to operate in any country without the need for jumpers or switches. The supplies are available in 800 and 1000W versions and provide outputs of 2, 5, 12, 15, 24, and 48V. Additional features and options include current sharing, soft start, overload and overvoltage protection, electronic inrush current limiting, remote sense, remote inhibit, remote margin, no-load operation, EMI input filter, and full safety-agency approvals. A forced current-share option provides the paralleling capability essential for redundant power systems. \$808 (100). Delivery, 10 weeks ARO.

Unipower Corp., 2981 Gateway Dr, Pompano Beach, FL 33069. Phone (305) 974-2442. FAX (305) 971-1837. **Circle No. 366**

Low-Profile Connector

- *Measures only 0.283 in. high*
- *Has surface-mount contacts*

The FCN228 can connect two pc boards end to end. Measuring only 0.283 in. high, the connector features two rows of surface-mountable contacts that are located on one side of the connector and are spaced on 0.050-in. centers. Contacts solder mount to the top and bottom edges of a daughter card, allowing it to be plugged into the mother board in the same plane. The connector insulator employs polyphenylene sulfide plastic, which handles the 220°C temperatures encountered in infrared reflow soldering processes. The connectors are available in 26- and 60-pin versions. Contacts are rated for 24A at 250V ac. Contact resistance equals 35 m Ω ,

and insulation resistance and dielectric withstanding voltage ratings equal $10^9\Omega$ and 500V ac, respectively. Operating range spans -55 to $+105^\circ\text{C}$. \$5.21 for 26-pin version; \$9 (1000) for 60-pin version.

Fujitsu Component of America Inc., 3330 Scott Blvd, Santa Clara, CA 95054. Phone (408) 562-1000. FAX (408) 727-0355.

Circle No. 367

Shielded Inductors

- Have inductance values ranging to 100,000 μH

- Comply with MIL-C-39010

Series M39010 fixed shielded inductors comply with the moisture, shock, and vibration-resistance requirements of MIL-C-39010. You can place the units side by side on a pc board without any crosstalk problems. The units are available in three styles (M39010/1, /2, /3) and have inductance values ranging from 0.1 to 100,000 μH . The devices are available with iron, ferrite, and phenolic cores. They operate over a -55 to $+105^\circ\text{C}$ range and comply with failure rate S (0.001%/1000 hour) of MIL-C-39010. The units weigh 1g max and pass a 5-lb terminal pull test. \$1.95 to \$4.10.

Nytronics Components Group Inc., 700 Orange St, Darlington, SC 29532. Phone (803) 393-5421. FAX (803) 393-4123. Circle No. 368

EMI Filter

- Attenuates 40 dB in the 100-kHz to 50-MHz band

- Has a 30W throughput

AF461 Series EMI filters complement high-frequency dc/dc converters. The units will attenuate 40 dB in the 100-kHz to 50-MHz band, and they will bring standard converters into accordance with MIL-STD-4611B CE03 noise limitations. Units are rated for either 1.75 or 3.8A max input current with as much as 30W throughput with 16 to 40V dc. The units are available

with an optional -55 to $+125^\circ\text{C}$ feature with full military screening. The filters are packaged in a hermetically sealed standard printed circuit or a flange-mount-type metal case that is less than 0.5 in. high and needs only 2.5 in.² of board space. \$101 (100); \$149 (100) for commercial and military-grade devices. Delivery, stock to 20 weeks ARO.

Advanced Analog, 2270 Martin Ave, Santa Clara, CA 95050. Phone (408) 988-4930. FAX (408) 988-2702.

Circle No. 369

Liquid-Crystal Display

- Requires no controller chip

- Features an 8-line \times 16-character format

The F1016 LCD graphics module provides a simple interface at low cost. The module's driver has a built-in memory, which supports a direct 8-bit parallel interface with a μP . The device features a 4×2.7 -in. viewing area, and it has an 8-line \times 16-character viewing format. The display's 0.85×0.85 -mm dots have 0.05-mm spacing. The module employs supertwist technology in a reflective mode. It measures $5.5 \times 4.3 \times 0.56$ in., has power-supply requirements of $\pm 5\text{V}$ at 3.5 mA, weighs 150g, and operates over a 0 to 50°C range. \$75 (100).


Seiko Instruments USA Inc., Liquid Crystal Display Dept, 2990 Lomita Blvd, Torrance, CA 90505. Phone (213) 517-7837. FAX (213) 517-7792.

Circle No. 370

DIP Sockets

- Withstand wave soldering
- Help prevent damage from oversized leads

The series 200C devices are closed-bottom, stamped, single-beam-contact DIP sockets that allow you to insert ICs prior to wave soldering. A patented contact design protects against flux and solder contamination while allowing for proper drain-

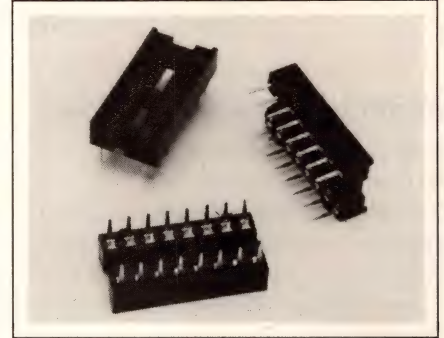

age during cleaning. The units feature an open-entry design to facilitate manual and automatic IC insertion. An antioverstress feature protects the contacts and helps eliminate damage from oversized leads. The sockets are available with 8 to 48 pins and are designed to military standards. Contacts are either beryllium copper or phosphor bronze with selective gold or tin-lead plating. Socket tails are available in three lengths. \$0.0026 to \$0.004 per pin.

Augat Inc., Interconnection Products Div, Box 779, Attleboro, MA 02703. Phone (508) 222-2202. FAX (508) 222-0693. Circle No. 371

Epoxy Evaluation Kit

- Epoxy comes in easy-to-mix packages

- Includes applications guide

The 600-4EPO-1000 evaluation kit features seven of the most popular Epotek epoxies. An applications pocket guide helps you determine which epoxies are best suited for particular applications. The kit includes five packages of each of the following epoxies—Epotek 301, 302, 302-3, 320, 353ND, 354, and 377. With the exception of the 354 type, all epoxies come in easy-to-mix 4g packages; the 354 epoxy comes in an 8g package. All characteristics and features are presented in a table contained within the pocket guide. \$129.85.

OFTI, 5 Fortune Dr, Billerica, MA 01821. Phone (508) 663-6629. FAX (508) 663-9351.

Circle No. 372

THE EXTREME PERFORMANCE



SO MUCH FROM SO LITTLE

High Level Of Integration. The TEK-AT1 features an 80C286 at up to 20 Mhz with system memory from 512 Kbytes up to 4 MBytes, two serial ports, one parallel port, a watchdog timer, a power failure detector, solid state disks with support for FLASH EPROMS, floppy and hard disk controllers.

Versatility. The TEK-AT1 can be used in a PC/AT passive backplane or as a stand alone computer for embedded applications.

Reliability. Teknor's products are built to operate in harsh environments. The TEK-AT1 can operate in extended temperature ranges and require very little power (sleep mode supported), typically less than 4 watts. The TEK-AT1 is backed by a two year warranty.

The solution: CALL 1 (514) 437-5682

 **TEKNOR**
MICROSYSTEMS INC.
CIRCLE NO. 79

The right connection

P.O. Box 455, Sainte-Thérèse (Québec) Canada J7E 4J8 • Fax: (514) 437-8053

NEW PRODUCTS

CAE & SOFTWARE DEVELOPMENT TOOLS

ROM Operating System

- Provides functionality of MS-DOS version 3.2
- Can run ROM-resident application programs

Version 1.28 of ROM-DOS now provides all of the functionality of MS-DOS version 3.2. This operating system can run directly from ROM (you don't have to download it to RAM); it occupies approximately 34k bytes of ROM and uses only 14k bytes of RAM. Enhancements include the ability to run, directly from ROM, any .COM or .EXE application programs that have been assembled so that the code is ROM-resident and only work space requires RAM. You can use a standard BIOS with ROM-DOS or, for embedded systems that do not need a full BIOS, the vendor supplies a

mini-BIOS that supports a remote console (via a serial port), a hardware timer, and serial communication ports. Firmware, \$6/copy (5000); developer's kit, \$495; source-code license, \$10,000.


Datalight, 17505 68th Ave NE, Suite 304, Bothell, WA 98011. Phone (206) 486-8086. FAX (206) 486-0253. **Circle No. 351**

CASE Tool For Program Structures

- Lets you create and modify program structures
- Provides a window-oriented user interface

Diamond X-Tools (developed by AID GmbH, Nuremberg, Germany) is a set of CASE tools that work with Nassi-Schneiderman block

charts, called Structograms. The structogram editor provides multi-window operations, pop-up menus, dialog boxes and selection lists, and context-sensitive, on-line help. You can write your programs in C, Ada, PL/M, Pascal, Fortran, Cobol, or Modula-2; the program automatically places your statements in pre-set areas of the various block types. The sourcetexters (supplied separately for each language) convert structograms into clear source code for compilation. You can call a syntax checker from within the structogram editor. It generates the source code via the sourcetexter; invokes the target compiler; reroutes the error listing and links it to the appropriate portion of the structogram currently on the screen; and highlights the statements that

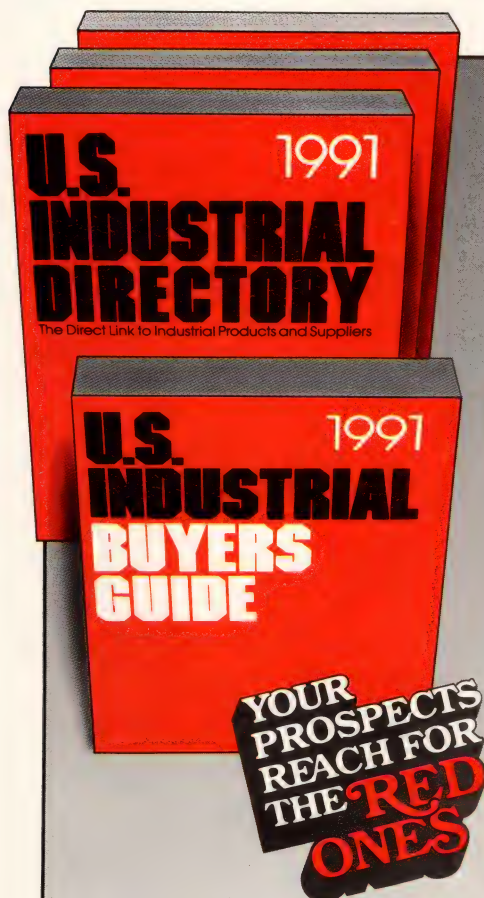

DOUBLE YOUR SELLING OPPORTUNITIES


The U.S. INDUSTRIAL DIRECTORY and The U.S. INDUSTRIAL BUYERS GUIDE now reach twice as many key buyers in U.S. manufacturing as before. Total circulation for the 1991 edition is over 100,000, with heaviest coverage in Fortune 500 companies!

Advertise in U.S.I.D. and you automatically extend your reach with the new, extra volume—U.S. INDUSTRIAL BUYERS GUIDE. 50,000 additional circulation—over 100,000 in all. At no additional cost your efficiency is better than ever!

Call or write for more information on your many advertising options. The DIRECTORY and the BUYERS GUIDE make sales contacts for you year-round!

U.S. INDUSTRIAL DIRECTORY & BUYERS GUIDE

Reed International • Cahners Publications
8 Stamford Forum, P.O. Box 10277, Stamford, CT 06904 (203) 328-2500 FAX (203) 357-7864

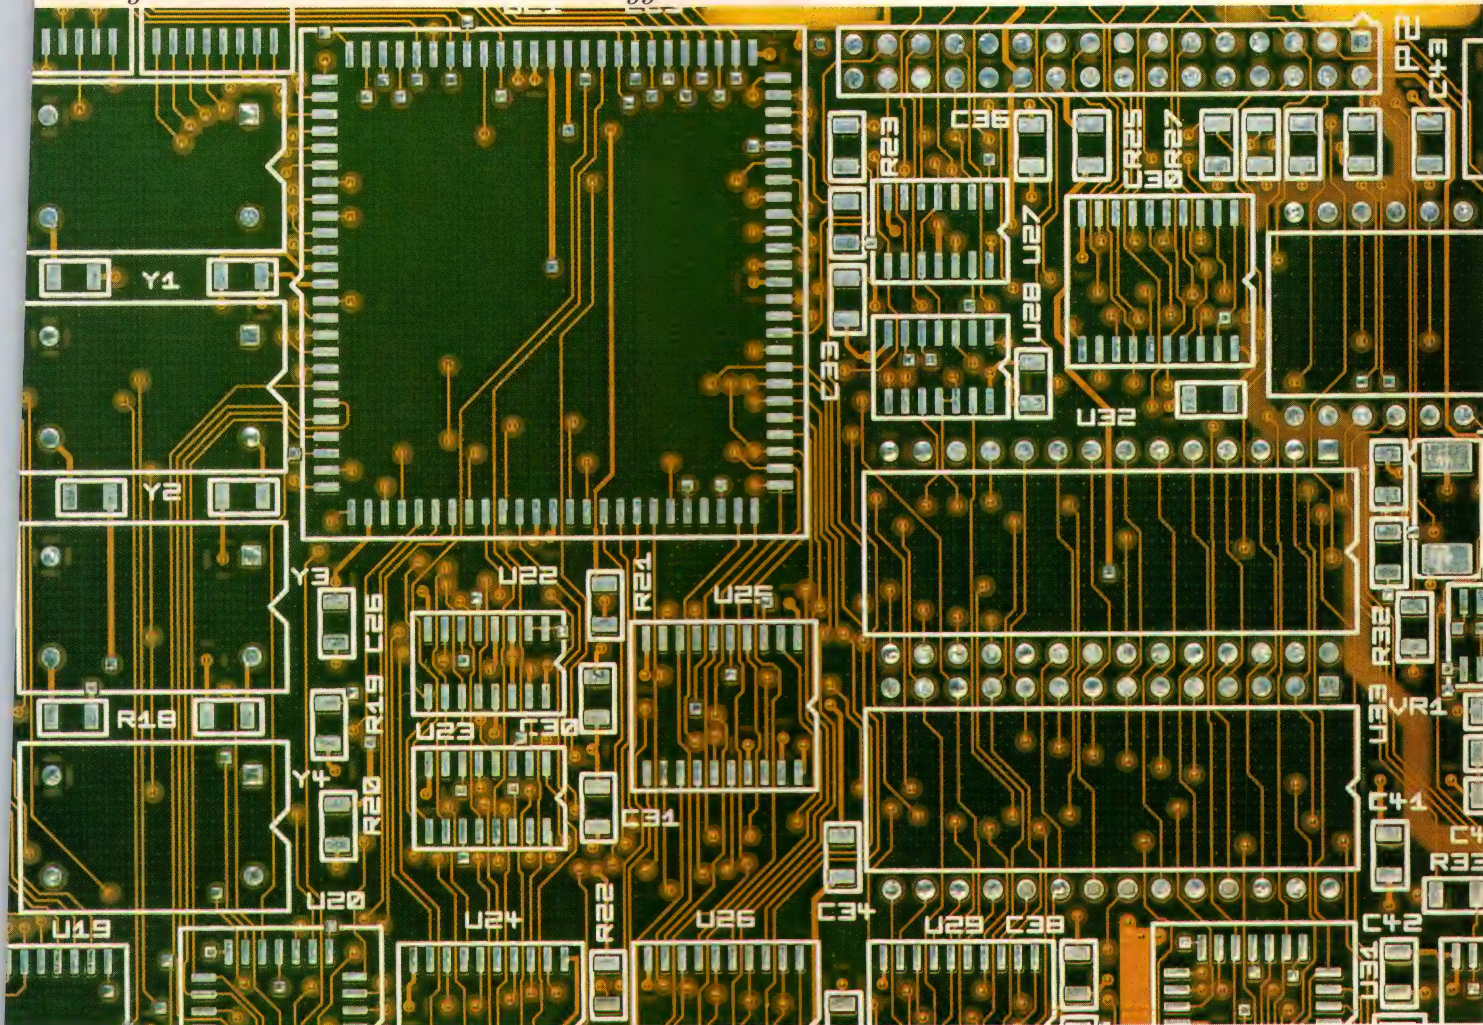

Printed circuit board provided courtesy of Western Digital Corporation.

No Matter What Kind Of Solder Mask Technology You Need, Du Pont Has You Covered.

No one offers a wider range of proven, quality photo-imageable solder mask products than DuPont. More importantly, no one knows more about how solder mask technology can affect your design, fabrication or assembly process.

Our knowledge and experience in solder mask technology is reflected in three different solder masks. That means we can help you match the right technology to your application—whether it's conventional through-hole or high-density fine pitch surface mount.

For dry film, count on VACREL® to encapsulate dense circuitry, tent via holes, and permit more electrical functions in less PWB real estate.

In liquid solder mask, VAQS™ photoimageable liquid provides a thin coating that conforms to PWB topography to

give you excellent encapsulation of circuitry.

Finally, the DuPont VALU™ system—the newest technology in the industry—combines the cost-efficiencies and thinness of liquids with the design freedom and quality of dry film in one unique liquid/dry film combination.

And of course, all DuPont solder mask products are available worldwide.

So, if you want to work with an objective partner who can offer you a variety of solutions to meet your solder mask needs, remember, no one has you covered like DuPont.

For more information, call 1-800-237-4357. Or write: DuPont Electronics, Room G-51875, P.O. Box 80029, Wilmington, DE 19880-0029.

DuPont Electronics
Share the power of our resources.



More Graphics Less Silicon

You think it's impossible

to compile your visual applications
and watch them execute at hardware speeds

to use graphics and imaging in an integrated environment

to select a compatible hardware accelerator
from a low-cost add-in to a
1400 MIP pixel supercomputer
and

to have a secure path into the future with
our development program of hardware accelerators,
software tools and application libraries?

We'll think again



The Fusion™ programme from
DU PONT PIXEL SYSTEMS
Your OEM Partner for Visual Solutions

0800·181·354

DU PONT PIXEL SYSTEMS LIMITED
Benchmark House, 203 Brooklands Road, Weybridge,
Surrey, England, KT13 0RJ. Telephone (44) 0932 850050
Trademarks. We acknowledge the use of all trademarks.



CAE & SOFTWARE DEVELOPMENT TOOLS

caused errors. A transformer module provides reverse-engineering facilities; it converts existing source code into a set of structogram files that the structogram editor can load, modify, and save. To run the tools, you'll need an IBM PC or compatible with 640k bytes of memory and a color or monochrome graphics adapter. From \$895.

Software Design Tools Inc., Sunset/Vine Tower, Suite 1126, 6290 Sunset Blvd, Los Angeles, CA 90028. Phone (213) 463-5090. FAX (213) 463-4319. **Circle No. 352**

Bernoulli Driver

- Takes advantage of Windows' removable-storage features
- Available as an upgrade

The Bernoulli Driver 4.72 fully supports the removable-storage-device features of Microsoft's Windows version 3.0. This driver is included

as part of the software package supplied to new purchasers of the vendor's Bernoulli Box drives. Users who have earlier versions of the device driver can upgrade it to version 4.72 for \$15.

Iomega Corp., 1821 W 4000 St, Roy, UT 84067. Phone (801) 778-1000. **Circle No. 353**

Prolog Development System Interfaces With C Programs

- Lets you link inference-based modules to C code
- Provides an X-Window-based user interface

Quintus Prolog 3.0 is a Prolog software-development system that runs on Sun-3 and -4 workstations. It allows you to write, edit, run, and debug inference-based functions, which you can then embed in an application program written in C. You can use the product's

Nobody does ferrites like DEXTER. We offer the industry's broadest selection of quality ferrites and associated hardware from world-class manufacturers. SIEMENS, MAGNETICS, FAIR-RITE, HITACHI, MMG/KRYSTINEL. From prototype quantities to production runs. From off-the-shelf to a wide range of value-added services — precision fabrication, E-core and pot-core gapping and testing, sorting and selecting by electrical specs.

Call Toll Free 1-800-345-4082 for Free Catalog and Nearest DEXTER Location

FERRITE CORES:

THE DEXTER DIFFERENCE —
One-Stop-Shopping for all your ferrite needs.




THE DEXTER CORPORATION

ATLANTA • BOSTON • CHICAGO • DALLAS •
LOS ANGELES • MINNEAPOLIS/ST. PAUL •
NEW YORK • SAN FRANCISCO • TOLEDO/DETROIT •
ENGLAND • WEST GERMANY

OUR FIELD OF EXPERTISE

*Raising The Standard
In Solder Mask Technology*

VALU:TM The Economy Of Liquid With The Design Freedom Of Dry Film.

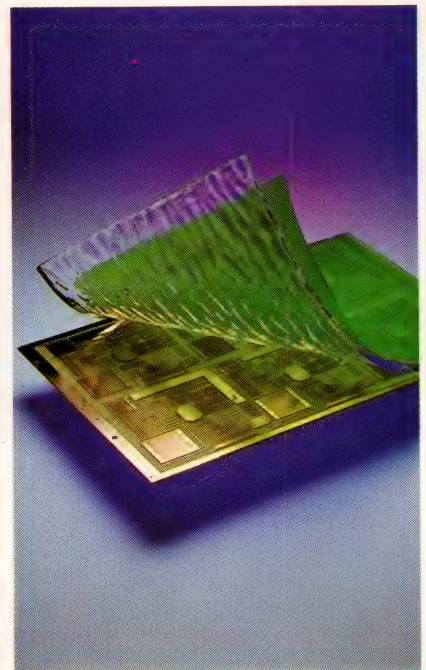


VALUTM, the next generation solder masking system, gives you the best of both liquid and dry film solder mask technologies: economical fabrication and assembly, and greater circuit density. The result is a uniform, defect-free mask. If you want optimum solder mask performance for today's and tomorrow's PWBs, don't settle for anything less than VALU. Call 1-800-237-4357.

DuPont Electronics

Share the power of our resources.



The Encapsulant Problem Solvers.

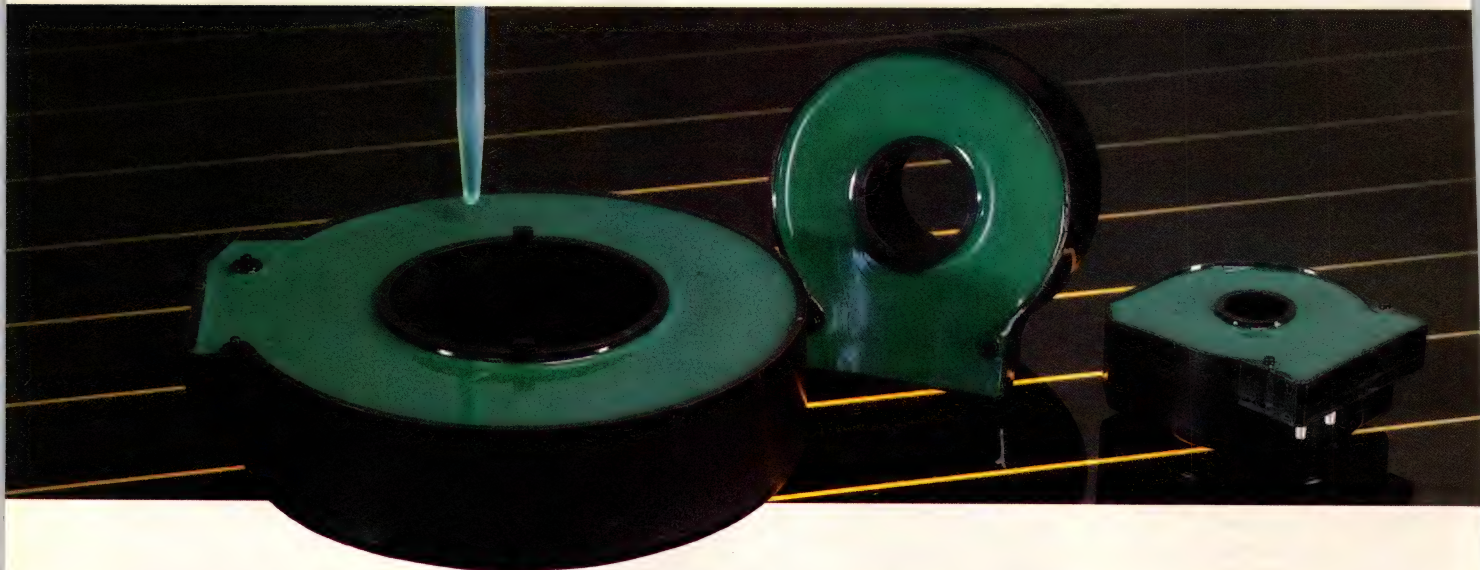

**With over 2,700 products, we've
got one for you.**

A case in point:

When an OEM manufacturer of power distribution systems needed a specialized encapsulant for toroidal coils, they called Emerson & Cuming. Their requirements specified an epoxy-based, single-component product which could eliminate meter/mix/dispense equipment, yet cure at a low temperature and possess exceptional thermal shock characteristics. The solution—one of our STYCAST® series encapsulants.

Emerson & Cuming offers thousands of standard products and the ability to customize for your specific application. We have the encapsulant, adhesive or coating you need to write your own success story.

To get a free selector guide or product sample for evaluation, give us a call.

1-800-832-4929.

Encapsulants • Adhesives • Coatings

**EMERSON
& CUMING™**
a GRACE company

You'll like our chemistry.

backward-chaining inference engine directly in expert systems, or as a tool for developing new expert systems. Prolog's virtual-memory database for both facts and rules, and the dynamic data structures that are created and accessed through pattern matching, suit applications in which programs manipulate other programs and data represents information about other data. Such applications include computer-aided tools, non-numeric simulations, and intelligent user interfaces. The system provides a user interface that is based on the X-Window standard; this user interface supports the OSF/Motif look-and-feel. The package includes a window-based source-level debugger and makes use of the X resource manager to allow you to customize your windows. \$10,000.

Quintus Computer Systems Inc., 1310 Villa St, Mountain View, CA 94041. Phone (415) 965-7700. FAX (415) 965-0551. **Circle No. 354**

3-D Imaging Software

- *Runs on Alliant FX/2828 supercomputer*
- *Uses ray-tracing algorithms*

Mental Ray is a 3-D ray-tracing software package that runs on Alliant's FX/2800 Series parallel supercomputers. The software uses 3-D ray-tracing algorithms to generate images that are almost indistinguishable from photographs. It accurately renders extensive detail seen in shadows, the effects of textures such as glass and chrome, and the influence of multiple light sources. The principle applications for the software are automobile and aerospace design, computational chemistry, scientific visualization, television and movie animation, and military simulation. The software was developed by Mental Images GmbH (Berlin, Germany) and is compatible with the Advanced Visualizer software from Wavefront Technologies (Santa Barbara, CA).

You can create models using the Advanced Visualizer on a workstation, and then send them for enhancement to an Alliant supercomputer that acts as a high-performance rendering server. The vendors are developing interfaces to CAD standards such as IGES to allow the system to import images directly from engineering CAD systems. From \$15,000, depending on host configuration.

Alliant Computer Systems Corp., 1 Monarch Dr, Littleton, MA 01460. Phone (508) 486-4950.

Circle No. 355

Graphics System Debugger

- *Supports IEEE floating-point format*
- *Provides redirection of output to log files*

Gspot (Graphics System Processor Operating Tool) 1.0 is a symbolic

debugger for TI's 34010 graphics system processor (GSP). The debugger runs on IBM PCs and compatibles, and you can configure it to work with any GSP-based hardware including TI's SDB board. You can install the debugger as a resident program while using another debugger for the host processor. You can return to Gspot either by pressing a hot key or by the action of breakpoints in the GSP program. Other features include symbolic debugging, C source-level debugging, a user interface similar to that of Microsoft's CodeView, on-line assembly, and a memory display/edit mode. The program also provides full TIGA support. \$995.

Pixelab Inc., 4513 Lincoln Ave, Suite 105, Lisle, IL 60532. Phone (708) 960-9339. FAX (708) 960-9396.


Circle No. 356

World Class Ferrite Core Manufacturers. At Your Fingertips.

To get the best in ferrite quality and service, you have to know the right buttons to push. 1-800-345-4082. That's your direct line to DEXTER, your One Stop Shopping Center for your every ferrite need. From world class manufacturers such as SIEMENS, MAGNETICS, FAIR-RITE, HITACHI, MMG/KRYSTINEL. From standard stock items, ready for 24-hour delivery, to the most intricate custom designs utilizing DEXTER's extensive value-added services, like precision fabrication, E-core and pot-core gapping and testing, and more.

Call Toll Free 1-800-345-4082 for Free Catalog and Nearest DEXTER Location.

ATLANTA • BOSTON • CHICAGO • DALLAS • LOS ANGELES • MINNEAPOLIS/ST. PAUL • NEW YORK • SAN FRANCISCO • TOLEDO/DETROIT • ENGLAND • WEST GERMANY



THE DEXTER CORPORATION



CIRCLE NO. 11

NETWORKING SOLUTIONS

FDDI, TOKEN-RING AND ETHERNET COMMUNICATIONS

The need to network has never been greater. Diverse processing platforms, distributed architectures, client-server, departmental and workgroup environments all contribute to increased demands on the network. System and network designers need a proven source of technology solutions for the wide range of networking and communication application problems they face. Interphase delivers those solutions.

FDDI, TOKEN-RING AND ETHERNET SOLUTIONS

Interphase has long led the industry in high-performance VMEbus peripheral controllers, and that same leadership is now evident in networking node controllers. Interphase has FDDI, Token-Ring and Ethernet solutions for virtually any VMEbus system application challenge.

PROVEN FDDI SPEED AND INTELLIGENCE

Interphase's FDDI 100 Mb/s offerings are a logical choice for the industry. The V/FDDI 3211 Falcon received *UnixWorld* magazine's Product of the Year designation and was the industry's first 6U VMEbus FDDI solution. Interphase's newest FDDI product is the V/FDDI 4211 Peregrine, a RISC-based high-performance node controller capable of link level operation or on-board protocol processing. The Peregrine provides single or dual attach configurations, with SMT (Station Management Software) running on-board, all in one 6U VME slot.

TOKEN-RING RESULTS

The V/Token-Ring 4212 Owl is an ultrafast Token-Ring node controller based on the partitioned architecture of Interphase's proven Eagle class of controllers. The Owl facilitates connectivity of UNIX® systems, workstations, supercomputers or any other VMEbus system into an IBM® environment using IEEE 802.5 Token-Ring. This multiple processor design provides an elegant queued interface to the system supporting IEEE 802.2 LLC, and a flexible 4 or 16 Mbit interface to the Token-Ring network.

ETHERNET CHOICES

Interphase also offers two Ethernet design options. The V/Ethernet 4207 Eagle 32-bit protocol platform is the high-performance standard for the industry, and offers on-board TCP/IP support. The V/Ethernet 3207 Hawk is designed specifically for cost-sensitive VMEbus applications.

GET YOUR NET WORKING NOW

No matter what your networking need - FDDI, Token-Ring or Ethernet - Interphase is ready to provide the solution. For more information call today:


(214) 919-9000




INTERPHASE
CORPORATION

OPEN SYSTEMS CONTROLLERS™


Disk • Tape • Networking

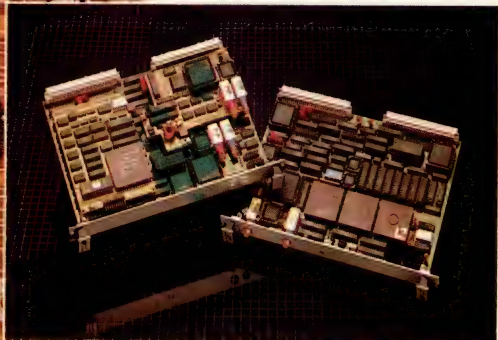

V/FDDI 4211 Peregrine
V/FDDI 3211 Falcon

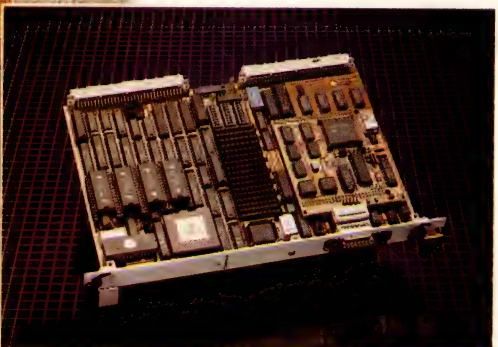

V/Token-Ring 4212 Owl

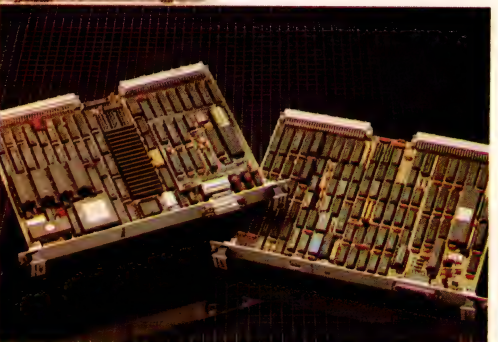

V/Ethernet 4207 Eagle
V/Ethernet 3207 Hawk

13800 Senlac • Dallas, Texas 75234 • (214) 919-9000 • FAX: (214) 919-9200 • NASDAQ-NMS:INPH

Interphase International
Astral House, Granville Way • Bicester, Oxon OX6 0JT • (01144) 869-321222 • FAX: (01144) 869-247720

© 1990 Interphase Corporation. Interphase is a registered trademark of Interphase Corporation. Open Systems Controllers is a trademark of Interphase Corporation. Specifications subject to change without notice. UNIX is a registered trademark of AT&T in the United States and other countries. IBM is a registered trademark of International Business Machines.

NEW PRODUCTS

TEST & MEASUREMENT INSTRUMENTS

Portable, Wideband, Polyphase Power Analyzer


- Offers 0.1% accuracy
- Works from 500 μ A to 20A, 15 mV to 600V, and dc to 100 kHz

The model 2500 wideband power analyzer captures instantaneous ac line voltage and current and computes virtually any related quantity with 0.1% accuracy. Examples of the computed values are watts, volt amperes, reactive volt amperes, power factor, phase angle, watt-hours, and volt-ampere hours. By connecting several analyzers, you can make measurements on polyphase power systems. The input frequency range is dc to 100 kHz. The voltage range is 15 mV to 600V, and the current range is 500 μ A to 20A. The power range is 75 to 9999 μ W. The unit contains low-

pass, highpass, and bandpass filters. An optional 8-channel analog output drives a chart recorder. \$1595; with polyphase capabilities, \$1795; RS-232C, \$275; IEEE-488, \$295.

Xitron Technologies Corp., 10225 Barnes Canyon Rd, Suite A102, San Diego, CA 92121. Phone (619) 458-9582. FAX (619) 458-9213.

Circle No. 357

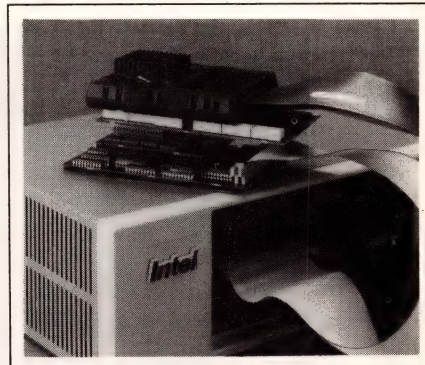

In-Circuit Emulator For 33-MHz i486


- Has 8k-byte trace buffer and 2M-byte expansion memory
- Fully supports μ P's protected mode

The ICE-486 performs real-time in-circuit emulation of the i486 32-bit μ P at speeds to 33 MHz. The emula-

tor fully supports the chip's real and protected modes and provides visibility of the on-chip cache. Its 2M bytes of expansion memory allow debugging of large programs. Use of symbolic references and automatic translation of virtual addresses to linear and physical addresses speed debugging. An 8k-byte trace buffer selectively cap-

When it comes
to scopes, some companies
talk a good line.

One company really has it. Designing a few scopes for "average" users leads to a line of average scopes. That's why Tek builds some 20 analog scopes and 24 DSO's. From 10 MHz to 40 GHz. From handhelds to lab scopes. From dependable basics to the advanced signal analysis of the DSA. Want a line with real substance? Call your Tek rep or 1-800-426-2200 for less talk and more Tek.

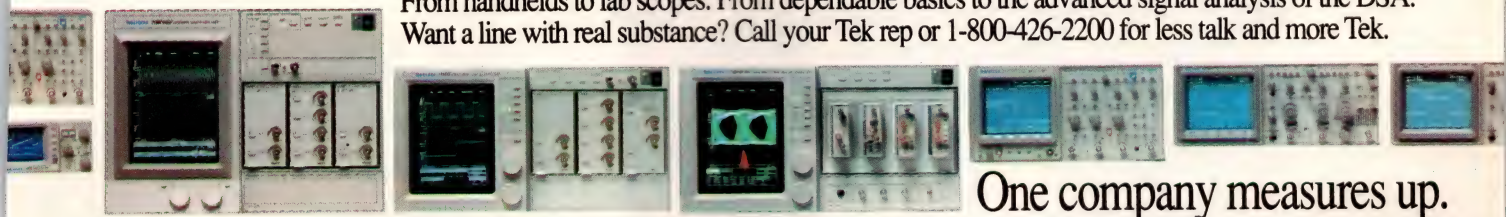

One company measures up.

Tektronix®

台 北

TAIPEI



ELEC '91 INTERNATIONAL ELECTRONICS & ELECTRICAL SHOW

March 11-15, 1991

Come join the brightest
stars that shine in the East.

Featuring

Electronic components


Electronic parts

Meters & instruments

Electrical apparatus & machinery

Computers & peripherals

Manufacturing equipment

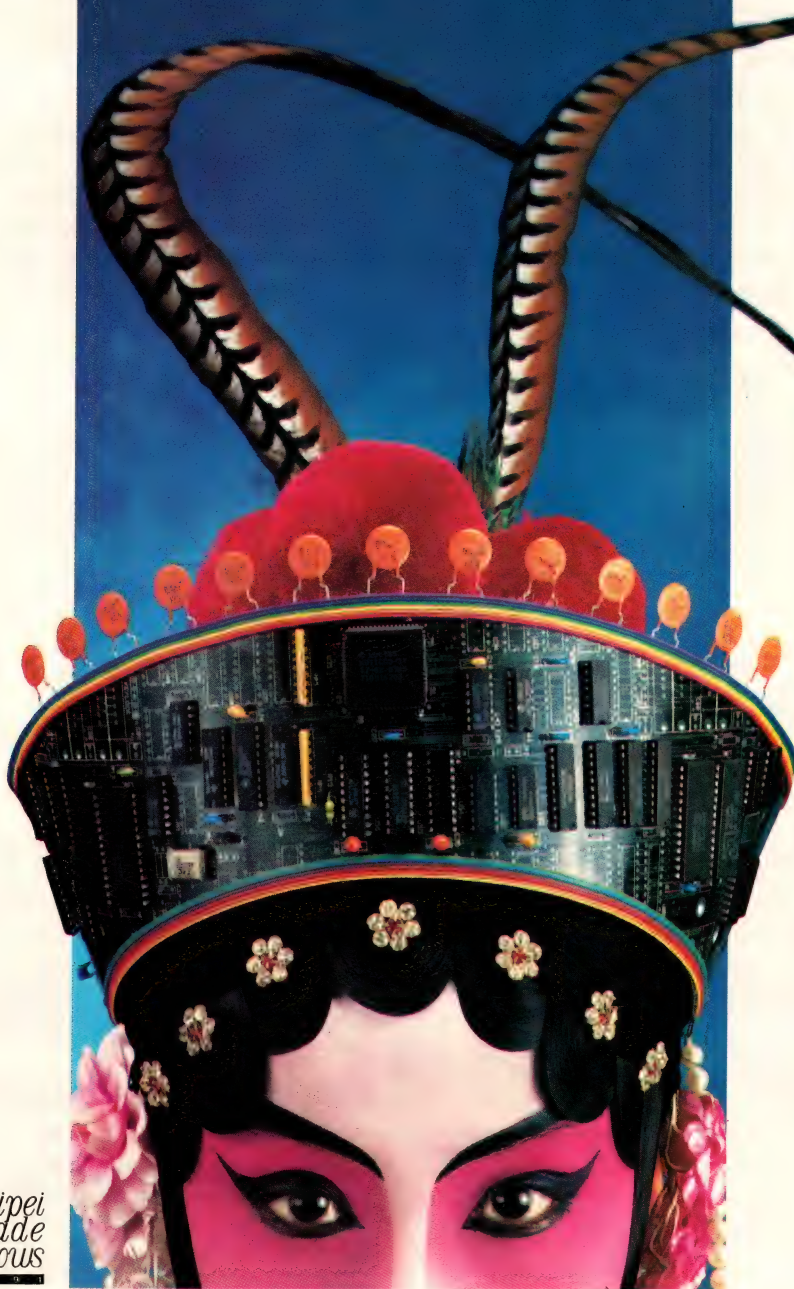

Organizer:



CHINA EXTERNAL TRADE
DEVELOPMENT COUNCIL

Sponsor:



TAIPEI WORLD
TRADE CENTER

Venue: TWTC EXHIBITION HALL
5 Hsinyi Road, Section 5, Taipei, Taiwan
Republic of China
Tel: (02)725-1111 Fax: 886-2-725-1314
Telex: 28094 TPEWTC

Branch Offices:

• New York-CETDC, Inc.
Tel: (212)532-7055 Fax: (212)213-4189
• San Francisco-Far East Trade Service, Inc.
Tel: (415)788-4304 Fax: (415)788-0468
• Chicago-Far East Trade Service, Inc.
Tel: (312)819-7373 Fax: (312)8197377

Taipei
Trade
Shows

CIRCLE NO. 83

tures bus activity or execution information. You can use the unit's event-recognition capabilities to set breakpoints on execution and bus events. The vendor offers a full set of tools for the i486 including a software debugger, a macro assembler, and compilers for C, Fortran, and PL/M. \$49,500.

Intel Corp, Box 58130, Santa Clara, CA 95052. Phone (800) 548-4725. **Circle No. 358**

Miniature RS-232C-To-IEEE-488 Converter

- *Is the size of a DB-25 connector shell*
- *Supports data transfers to 19.2k bps*

The 500-Serial is about the size of the shell of a DB-25 connector—the industry standard for RS-232C. The tiny unit allows you to control from one to eight IEEE-488-interfaced



instruments from the RS-232C port of a computer that lacks an IEEE-488 port. The 5-mA operating current comes from the serial port's handshaking lines. Data transmission occurs at speeds as high as 19.2k bps. The unit supports the following IEEE-488 functions: SRQ, SPE, LLO, DCL, and GET. With the converter, the vendor supplies a 15-ft RS-232C cable and a 9- to 25-pin adapter that lets you use the converter with the serial ports of

IBM PC/AT-compatible computers. An MS-DOS diskette contains programming examples. \$299.

Keithley Instruments Inc, 28775 Aurora Rd, Cleveland, OH 44139. Phone (800) 552-1115; in OH, (216) 248-0400. FAX (216) 248-6168.

Circle No. 359

BNC Attenuator Kit

- *Operates from dc to 1 GHz*
- *Includes 3-, 6-, 10-, and 20-dB units*

The TPI-100 BNC attenuator kit contains four 50Ω attenuators, a 50Ω feedthrough, and a 50Ω termination. The insertion loss of the attenuators is 3, 6, 10, and 20 dB. Because they use thick-film resistor networks, the attenuators work from dc to 1 GHz. The rectangular shape of the enclosures prevents the units from rolling off a workbench. The units are reportedly

When it comes
to DSOs, some companies
aim towards banner specs.

One company begins with them.

It's the difference between face value and real value: do you build for appearances? Or for solid fidelity, effective analysis, and long-lived adaptability? Tek doesn't take shortcuts that shortchange you later. Want a scope that does the optimum, not the minimum? Call your Tek sales engineer or 1-800-426-2200: the deeper you probe, the more you'll appreciate Tek.



One company measures up.

Tektronix®

FOR EMI SHIELDING COMPLIANCE: **HARD WORK...**



OR EASY CALL



Faced with designing or testing a product which must comply with one of the many commercial or military EMI specifications? You have two choices:

You can dig through the mountain of published material...and still not be much further ahead.

Or, you can make one easy phone call to Chomerics. Because whatever standards you're dealing with, our people know them inside and out. No other supplier delivers the combination of knowledge, products, and services to make your EMI problems disappear.

Design Help

Call us early on in the design phase of your product and take advantage of our no-charge EMI design review. We'll help you get it right the first time.

Applications Assistance

With your design criteria in mind, we'll look across the full range of EMI shielding possibilities, and provide detailed drawings and prototypes on short notice.

EMI Testing

Our depth of experience becomes very important when it's time to test your system. The fact that we operate comprehensive military and commercial testing facilities, with on-site design, applications support, and materials manufacturing, is a real advantage to our customers.

BEFORE CONSULTING THE SPECS, CONSULT THE SPECIALISTS.

CHOMERICS
a GRACE company

77 Dragon Court • Woburn, MA 01888
TEL: 800-225-1936 (In MA: 617-935-4850) • TWX: 710-393-0173

Chomerics (UK) Ltd.
Unit 8, First Avenue • Globe Park Industrial Estate
Marlow, Bucks., SL7 1YA • ENGLAND
TEL: (06284) 6030 • TELEX: 849817 CHOMER G

more rugged than more expensive units. An easily carried transit case houses the six pieces in the kit. \$110.

Test Probes Inc., 9178 Brown Deer Rd, San Diego, CA 92121. Phone (800) 368-5719.

Circle No. 360

Source-Level C Interface For 80186 ICE

- Supports an unlimited number of symbols
- Lets you view source, assembly, and mixed-mode code

HyperSource is a windowed, C-language, source-level interface for the vendor's Mice-III-80186 in-circuit emulator. The interface displays source code, assembly code or source and assembly code interleaved. The software works with code files in Intel OMF (object-module format) or Easy OMF. The num-

ber of symbols is unlimited, and you can access all symbolic information, including the names of symbols of local and global scope. The register contents and a watch-variable window are updated after every breakpoint or single step. You can directly alter these quantities or use C operations to modify them after they increment. The interface software provides quick access to the stack trace, which contains information on all currently active modules and the exact sequence of routines whose execution caused the operating program to reach the current memory location. Versions of the software run on IBM PC/ATs and 80386-based PCs. Both versions need 2M bytes of RAM and cost \$1750.

Microtek International, 3300 NW 211th Terrace, Hillsboro, OR 97124. Phone (503) 645-7333. FAX (503) 629-8460. **Circle No. 361**

Dielectric Constant Characterization Kit

- Works with network analyzer and computer
- Includes probe and software

The HP 85070A kit works with a network analyzer and a computer to measure the dielectric properties of materials used in electronics as well as of materials used in the food and chemical industries. The system measures the material properties as a function of frequency to 20 GHz. Measured quantities include the sample's complex permittivity and dielectric-loss factor. The IBM PC-compatible software runs under Microsoft Windows. \$3950; complete systems including network analyzer and computer, from \$36,000. Delivery, 12 weeks ARO.


Hewlett-Packard, 19310 Pruneridge Ave, Cupertino, CA 95014. Phone (800) 752-0900.

Circle No. 362

When it comes
to DSOs, some companies
duck the tough questions.

One company spells them out.

12 Tough Questions looks beyond banner specs to critical issues most DSO vendors don't want you to ask. Acquisition, glitch detection, update rate, triggering — Tek's sales engineers welcome the kind of questions that get to the facts of performance. Want a scope that has nothing to hide? Contact your Tek sales engineer, or call 1-800-426-2200 for a copy of *12 Tough Questions*, free.

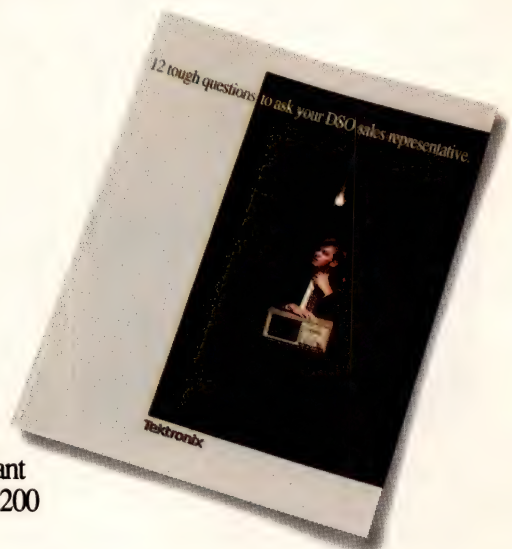

One company measures up.

Tektronix®

NEW PRODUCTS


COMPUTERS & PERIPHERALS

Stereo Digital Audio Board

- *Simultaneously records and plays back two audio channels*
- *Utilizes TI's 320C10 DSP chip and has 80-dB dynamic range*

The Series 2/SX-8 is a stereo digital audio board for the 16-bit ISA bus. It lets the user perform high-fidelity, direct-to-disk recording. The board can simultaneously record and play back two separate audio channels with 16-bit resolution. It utilizes TI's 320C10 DSP chip, and it has a dynamic range of 80 dB. It has a frequency response of 20 Hz to 20 kHz. It achieves a S/N ratio of 75 dB, and its total-harmonic-distortion specification is 0.1%. You can control sampling rates, volume, bit resolution, antialiasing filtering, and data-file formats using the supplied software. The board can record data in either 16-bit PCM format or 4-bit ADPCM format for 4:1 data compression. You can operate two or more boards in tandem for multichannel recording. \$1395.

Antex Electronics Corp., 16100 S Figueroa St, Gardena, CA 90248. Phone (213) 532-3092. FAX (213) 532-8509. **Circle No. 381**

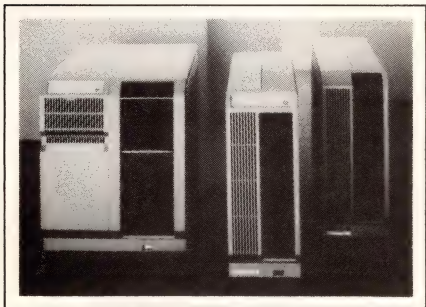

File Server

- *Contains from one to four MC88100 RISC CPUs*
- *Delivers 100-MIPS performance*

The Triton 88 file server contains from one to four MC88100 RISC CPUs. A fully loaded system delivers 100-MIPS performance. In addition, the CPU board contains from

two to eight MC88200 cache and memory units providing 32k to 128k bytes of cache memory for the CPUs. Each of the CPUs has access to as much as 128M bytes of shared memory on the CPU board. The system uses dedicated MC68020 μ Ps as I/O processors. The basic system can be expanded to accommodate as many as 14 I/O processors. Disk mirroring runs solely on the processors. The system also contains a link to a VMEbus for adding standard VMEbus boards. An uninterruptible power supply allows 3 minutes of soft shutdown when power disappears for more than 5 sec. 3-board system with 20-MHz CPU, \$54,000.

Dolphin Server Technology AS, Olav Helsetts vei 6, Box 52, Bøgerud, N-0621 Oslo 6, Norway. Phone +47 262 7000. FAX +47 262 7313. **Circle No. 382**

X-Windows Display Station

- *Has a 15-in. grayscale display with 1152 \times 900 pixels*
- *Utilizes a 20-MHz 68020 μ P and 2M bytes of DRAM*

The X-15 Turbo is an X-Windows display station in a small footprint. It has a 15-in. landscape display with grayscale. The display has 1152 \times 900-pixel resolution and a refresh rate of 70 Hz. The station utilizes a 20-MHz MC68020 μ P, and it has 2M bytes of RAM, which is expandable to 8M bytes in 1M-byte increments. Because the station doesn't have fans or disk drives, it runs silently. The unit comes with an optical mouse and a choice of industry-standard keyboards. The unit can operate on thick and thin Ethernet networks as well as on RS-232C or RS-422 serial communications links. The unit can support TCP/IP and DECnet protocols as an option. The company's X server software is either resident in firm-

ware or downloadable from the host. \$2975 with 2M bytes of RAM and grayscale.

Visual Technology Inc., 120 Flanders Rd, Westboro, MA 01581. Phone (508) 836-4400. FAX (508) 366-4337. **Circle No. 383**



X-Window Terminal

- *Contains a 19-in. screen with 1024 \times 800 pixels*
 - *Simultaneously accesses hosts running Unix, VMS, UL-TRIX*
- The NCD19b X-Window terminal can simultaneously access host computers running Unix, VMS, or UL-TRIX operating systems. A 16-MHz MC68000 μ P drives the text, windowing, and 2-D graphics displays. The unit contains a single gate array that performs more than 40 discrete functions such as graphics control, memory control, and display control. It comes with 2M bytes of dynamic RAM, which is upgradable to 5M bytes using single in-line memory modules (SIMMs). The unit comes with a 19-in. screen that has a resolution of 1280 \times 1024 pixels. The terminal supports a variety of communications protocols including TCP/IP, SLIP, DECnet, and the company's XRemote for local and remote serial communications. It works with any graphics user interface including OSF/Motif,

Marilyn, You're The Greatest.

If you asked Marilyn Monroe's fan club who they thought was the greatest screen actress, guess what they would answer. Fans express loyalty above objectivity.

The same is true in publication readership studies. When a publication sends readership questionnaires to its own readers and asks, "Which publication do you read regularly?"—guess what they'll answer! While these studies are not wrong or misconducted, they result in an obvious bias.

If you're interested in a publication's readership, the best readership studies are conducted across a company's customer/prospect list or an *independent* industry list.

The next time you see a publication tooting its horn over a readership win at a company like IBM, AT&T, or Sun Microsystems—don't be too impressed. With those big-name headlines comes some small print. Take a second to notice where the questionnaires were sent. If it's a publication's own subscriber list then you'll know the study results are nothing more than fan mail.

EDN Magazine
Edition
News
Edition
*A Partnership in Power & Prestige
Worldwide*



- EDN has won 84% of all *independent* readership/reader preference studies conducted since 1978. No other electronic engineering magazine or newspaper in the US or throughout the world has won more *independent* readership/reader preference studies than EDN. And, EDN is willing to pay \$1000 to anyone who can disprove its claim to leadership in readership.

On a higher




level: Apec HT



Heat resistance improved to 205 °C

New [®]Apec HT based on modified polycarbonate now offers a higher level of properties than ever before:

- improved heat resistance (currently extending from 160 °C to 205 °C, with a further increase in the upper limit planned)
- improved transparency
- improved UV stability
- improved flowability for greater processing economy.

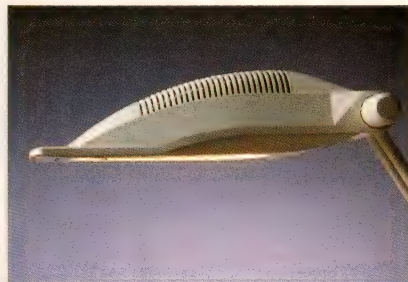

"Falcon"-type light fitting from Luxo

Housing materials for halogen lamps like this have to meet particularly demanding design criteria:

- resistance to high temperatures
- good processability
- outstanding dimensional stability
- wide freedom of design.

For the processor, the days of compromise are now over! Apec HT opens the way to cost-effective production of components offering exceptional long-term heat resistance in high temperature operation.

If you've a moulding problem, our Applications Development Section will be happy to help you find the answer. For an immediate response in urgent cases, phone 0214/30 85 08 or 3 08 15 72.

Bayer AG
Plastics Business Group
D-5090 Leverkusen, Bayerwerk
West Germany

Plastics Business Group

Bayer



Looking for a job doesn't have to be one.

EDN's Career Opportunities
section keeps you informed
of current job openings
from coast-to-coast

**TURN TO
PAGE** **182**

The best address for Siemens Semiconductors

- (A) **Wien**
Tel. (02 22) 71711-56 61
- (AUS) **Melbourne, Vic. 3121**
Tel. (03) 420 7111
- (B) **Bruxelles**
Tel. (02) 536-2111
- (BR) **São Paulo-SP**
Tel. (011) 833-2211
- (CDN) **Mississauga L5T 1P2**
Tel. (416) 564-1995
- (CH) **Zürich**
Tel. (01) 495-3111
- (D) **Berlin 10**
Tel. (030) 3939-1
Düsseldorf 1
Tel. (0211) 399-0
Frankfurt 1
Tel. (069) 797-0
Hamburg 1
Tel. (040) 2889-0
Hannover 81
Tel. (0511) 877-0
München 80
Tel. (089) 9221-4391/4138
Nürnberg 1
Tel. (0911) 654-0
Stuttgart 1
Tel. (0711) 2076-0
- (DK) **Ballerup**
Tel. (44) 7744 77
- (E) **Madrid**
Tel. (01) 555 40 62
- (F) **Paris**
Tel. (1) 4922-3810
- (GB) **Sunbury on Thames**
Tel. (0932) 75 2615
- (GR) **Amaroussio/Athen**
Tel. (01) 68 64-111
- (HK) **Hongkong**
Tel. 5-833 02 22
- (I) **Milano**
Tel. (02) 6766-42 41
- (IND) **Bombay 400018**
Tel. 4938786
- (IRL) **Dublin**
Tel. (01) 3028 55
- (J) **Tokyo 100**
Tel. (03) 201-24 01
- (N) **Oslo 5**
Tel. (02) 6330 00
- (NL) **Den Haag**
Tel. (070) 333 33 33
- (P) **Alfragide**
Tel. (01) 418 33 11
- (RA) **Buenos Aires**
Tel. (01) 3004 11
- (RC) **Taipei**
Tel. (02) 5 23 47 00
- (ROK) **Seoul**
Tel. (02) 2 75-6111
- (S) **Kista**
Tel. (08) 70335 00
- (SF) **Helsinki**
Tel. (9) 0510 51
- (SGP) **Singapore 0513**
Tel. 7 76 00 44
- (TR) **Istanbul**
Tel. (01) 1510900
- (USA) **Iselin**
Tel. (201) 906-4300 (Discrete)
Santa Clara
Tel. (408) 980-4500 (ICs)
Cupertino
Tel. (408) 725-7910 (Opto)
- (ZA) **Johannesburg**
Tel. (011) 407-4111

SIEMENS



Handsfree, Loudhearing

A new class of ICs

Telephone users will be excited by the spread of handsfree talking and loudhearing facilities. Siemens is now offering a highly integrated silicon solution supporting these features. Even developers are all ears when they hear about our PSB 45030. The device offers high performance speech control in a class of its own. Everything that normally leads to higher cost is integrated right through to the tuned output stage.


The PSB 45030 is the latest device in a series of innovative telephone technology products. Developed by Siemens of course, a pioneer in advanced telecommunication technology from whom one can expect a lot. For example background noise monitoring allowing a remarkable improvement in speech transmission.

To support design flexibility there's a wide supply range from 3 to 10 V, plus the possibility to individually adapt to the acoustical surrounding.

Once you get acquainted with the Siemens telephone chips, you'll know where the best choice is; the

configurations offered by the PSB family. And once you get to know the PSB family, starting with the PSB 45030, you won't want to be without this class of performance anymore.

For more information just contact your local Siemens office or write to Siemens AG, Infoservice HL 1587, Postfach 2348, D-8510 Fürth, West Germany mentioning "PSB family".



**TopTech
Semiconductors
Siemens**

CIRCLE NO. 85




In 1979, Margaret Thatcher is voted in as Prime Minister of Great Britain...

In 1980, Ronald Reagan is elected President of the United States...

In 1981, Sandra Day O'Connor is the 1st woman on the Supreme Court...

In 1982, Yuri Andropov is elected as the leader of the USSR...

In 1983 Lech Walesa Poland wins the Nobel Peace Prize...

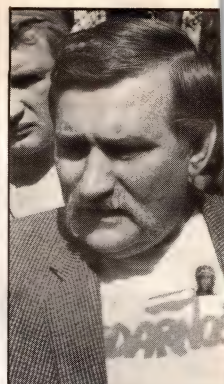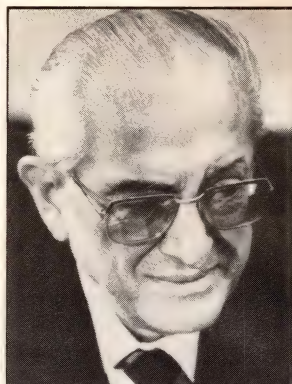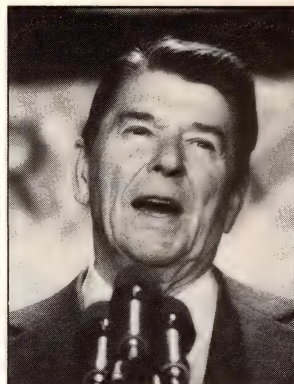

and EDN is voted #1 in readership.

and EDN presides as #1 in readership.

and EDN is first in readership.

and EDN leads as #1 in readership.

and EDN wins the #1 prize in readership.

WORLD

*All Around The World, They Come; And They Go
There Has Been Only One Leader Since 1978... EDN*

Winning one study doesn't make history. But winning 84% of 177 independent readership studies since 1978 makes EDN a first class world leader. That's more wins than the rest of the electronics publications combined.

Announcing 7 new EDN independent

	EDN	Electronics
Zenith Electronics	#1	5
Sprague Semiconductor	#1	5
SGS Thomson Semiconductor	#1	5
3M	#1	5
Apex Technology	#1	5
Sipex Corporation	#1	4
Kyocera Northwest, Inc.	#1	NOT INCL.

CUMULATIVE WINS —

% of Readership/Reader Preference Wins* 1978–1989 (to date)



177 studies/256 questions

Percentages add to more than 100% due to ties

*Independent studies are conducted across customer/prospects lists or TIDS lists, not across a magazine's or newspaper's own list, which results in obvious bias. **Results based on the question




In 1984, Ronald Reagan is elected #1 in a landslide...

In 1985, Mikhail Gorbachev is elected as the leader of the USSR...

In 1986, Corason Aquino is chosen as the President of the Philippines...

In 1987, Margaret Thatcher wins a third term as Prime Minister...

In 1988, George Bush is elected to highest office in the United States...

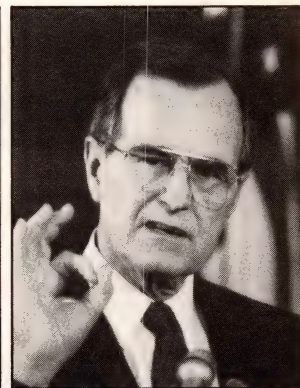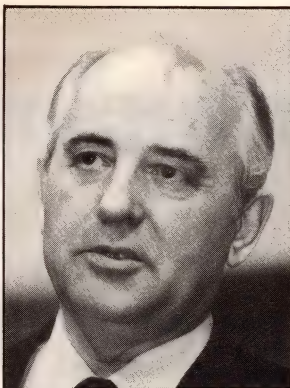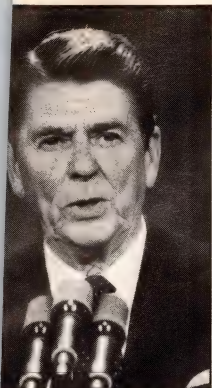

EDN is re-elected #1 readership landslide.

and EDN is elected the leader in readership.

and EDN is chosen as #1 in readership.

and EDN wins another year as the leader in readership.

and EDN holds the #1 spot in readership.

LEADERS

But In The World Of Covering Electronics Technology, and EDN's Leadership In Readership Reign Continues.

Readership/reader preference study* wins:

Electronic Design	Electronic Products	EE Times	Electronic News
2	4	3	NOT INCL.
2	4	3	NOT INCL.
4	3	2	NOT INCL.
2	4	3	6
2	3	4	NOT INCL.
2	NOT INCL.	3	NOT INCL.
3	2	4	5

And only a leader dares to offer \$1000 to anyone who can disprove its claim to readership. No other electronic engineering magazine or newspaper in the US or throughout the world has won more independent readership/reader preference studies than EDN.

EDN Magazine Edition
News Edition

A Partnership in Power & Prestige Worldwide

84%

If you would like to see the complete record of EDN's readership wins, contact your local sales representative. EDN will send you a six-foot long brochure that proves history repeats itself.

Which of these publications do you read regularly (3 out of 4 issues)?* in each study.

Commitment to Technology

Magazine Edition

The electronics industry's
leading design publication

News Edition

The electronics industry's
only technical newspaper



EDN Magazine
Edition
News
Edition

A Partnership in Power and Prestige Worldwide

Openlook, or Xview. \$2295 with 2M bytes of RAM.

Network Computing Devices Inc., 350 N Bernardo Ave, Mountain View, CA 94043. Phone (415) 694-0650. FAX (415) 961-7711.

Circle No. 384

Expansion Units

- Connect to the expansion port on T3100SX laptop
- Let user add PC expansion cards to the computer

The WonUnder and WonUnder II are expansion units for Toshiba's T3100SX laptop computer. The WonUnder consists of a metal card carrier, which accommodates a PC expansion card that is 11 in. or less in length. An interface card plugs into the laptop's expansion port. Its small size lets the card fit in a Toshiba carrying case with the computer. The WonUnder II consists

of an expansion chassis that can accommodate full-size PC expansion cards. An interface card attaches to the expansion port of the computer. The card comes with an interface cable and an external power supply. Both units permit the laptop computer to utilize PC expansion cards such as network cards, VGA cards, or additional memory cards. WonUnder, \$379; WonUnder II, \$479.

Connect Computer, 9855 W 78th St, Suite 270, Eden Prairie, MN 55344. Phone (612) 944-0181. FAX (612) 944-9298. Circle No. 385

Master Or Slave CPU Board

- Uses V25 μ P in an all-CMOS design for STD Bus
 - Works as embedded controller or I/O board from -40 to $+85^{\circ}\text{C}$
- The 8825 all-CMOS CPU board for the STD Bus uses an NEC V35 μ P.

Programmable gate arrays from Xilinx allow the board to function as either a master or slave on the bus. The board has the following embedded-controller features: an interrupt controller; two serial ports; 16 parallel ports; two 16-bit timer/counters; a real-time clock; a watchdog timer; and a battery-backed static RAM (SRAM). Four JEDEC sockets provide 512k bytes of EPROM and 256k bytes of SRAM. The board also has an SBX expansion connector for expanding the slave board's peripheral functions and an option for an analog I/O channel. You can digitize eight analog input channels with 12-bit accuracy. You can set the analog output at 4 voltage ranges with 8-bit accuracy. Communication with the host is either via interrupts or by a message. The host can transfer a message through the board's dual-port

Text continued on pg 161

When it comes
to DSOs, some companies
let you stare at a video.

One company lets you compare for yourself.

Sitting through a video demo is like sightseeing with blinders on. So 18,000 engineers have already asked for Tek's free Scope Evaluation Kit, with test board and manual to help you compare scopes and draw your own conclusions. Ready to blow the lid off canned demos? Get face-to-face with your Tek sales engineer, or call 1-800-426-2200 to qualify for the Scope Evaluation Kit.



One company measures up.

Tektronix®

Mixed-signal ASIC



Face it, a lot of designers have mixed feelings about mixed-signal ASICs.

They know they need a higher level of integration on their silicon. But they also know that mixed-signal ASICs can be a challenge. A big one.

For these designers, NCR meets the challenge.

NCR has digital and analog libraries – characterized over commercial and military temperature ranges with functions ranging to 12-bit A/Ds and CMOS processes from 1.5 to sub-micron. With user friendly software tools to put them together.

And, with NCR DesignSim A & D, a comprehensive Analog/Digital System Simulation Package, you may simulate the individual ASIC or the entire system, at speed!

NCR also provides off-the-shelf kit parts for in-depth system evaluation, and custom designed cells for special requirements.

NCR can deliver a few prototypes or a few hundred thousand parts all manufactured with the same controls and processes that assure you the most reliable products available.

And in addition, NCR has a mixed-signal test environment created specifically to test Analog/Digital ASICs without compromising either domain.

All this has resulted in NCR being ranked #1 in worldwide cell-based mixed-signal ASIC suppliers*.

And that's why designers who know NCR, don't have mixed feelings about mixed-signal ASICs.

Call 1-800-334-5454 for complete information.





*Integrated Circuit Engineering, 1988/1989

Creating value




Worldwide Sales Headquarters
3130 De La Cruz Boulevard, Suite 209
Santa Clara, California 95054
1-800-334-5454

without mixed feelings

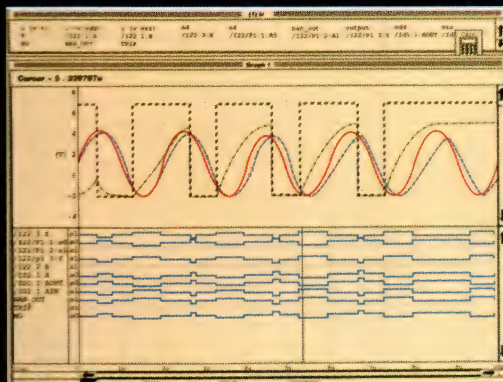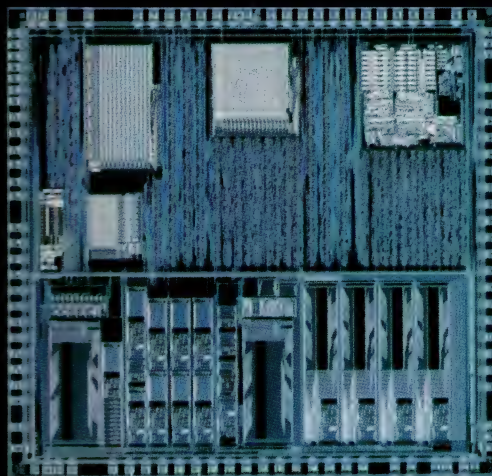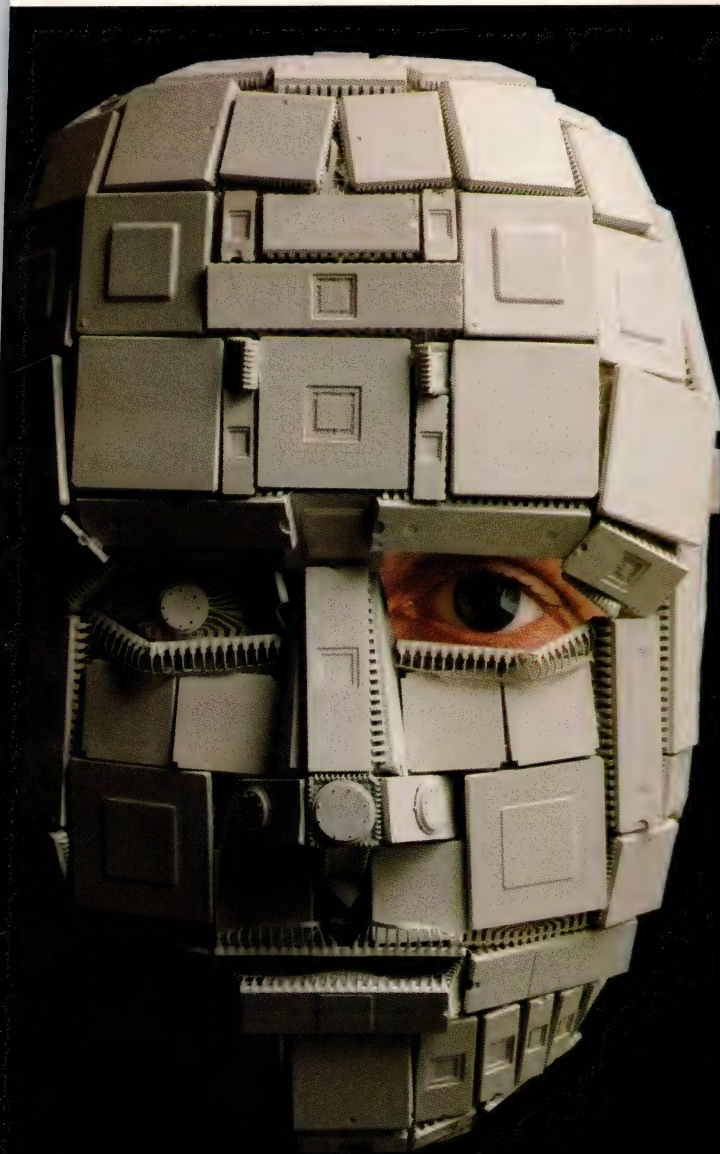

European Sales Headquarters

Gustav-Heinemann-Ring 133
8000 München 83
West Germany
49 89 632202



Asia/Pacific Sales Headquarters

2501 Viewood Plaza
199 Des Voeux Road
Central Hong Kong
852 859 6044

PSSST...

Even though they're Power Factor Corrected, the power supplies you're now using could ban your products from Europe after 1992. They might keep you from doing business domestically, too.

Your PFC supplies might not meet IEC 555-2 because they have too much current circulating in third and fifth order line current harmonics.

Pioneer supplies have less than 5% total harmonic current content. They feature built-in >.99 active Power Factor Correction, meet proposed IEC 555-2,

all applicable international safety and EMC standards, and are available from 250 to 2000 watts, in single or multiple outputs. Delivery for most models in OEM quantities is 60-90 days.

P.S. — We apologize for not having brought you this information earlier. But the word is out. We've been shipping our PFC supplies worldwide for more than two years. So call us now at 800-233-1745, or 800-848-1745 in California.

Pioneer Magnetics

3M Introduces Heat Shrinkable Cable Shield Terminators

Meet MIL-S-83519 for one-step soldering of ground wires to cable shielding

AUSTIN, Tex. — New 3M brand MIL-S-83519 shield terminators provide an insulated, environmentally protected strain relieved solder termination.



3M shield terminators are available in five diameters with and without pre-installed ground leads per MIL-S-83519.

provide MIL spec markings that are clearly visible before and after application to assist quality control inspections.

Environmentally and mechanically protected solder connections are the result of a three part process:


1. The outer sleeve shrinks
2. The solder preform melts and flows, completing the connection
3. The thermo plastic insert melts to provide a seal

To aid in the correct application of these heat shrinkable shield terminators, 3M offers heating devices, MP-700 for hot air, ST-3000 for infrared.

The completed assembly provides thermal and electrical insulation, identification, strain relief, moisture sealing and chemical protection.

For more information contact a 3M Electrical Specialties Division representative or authorized distributor or call 1-800-322-7711.

3M Electrical Specialties Division
PO Box 2963
Austin, Texas 78769-2963



CIRCLE NO. 16

COMPUTERS & PERIPHERALS

RAM. The board operates from -40 to +85°C. Basic configuration, \$395; maximum configuration, \$605.

Systek, 415 N Quay St, Suite 6, Kennewick, WA 99336. Phone (509) 735-1200. Circle No. 386




Handheld Grayscale Scanner

- Renders 256 different shades of gray
- Scans images with 400-dpi resolution

The NuScan PC Grayscale Scanner is a handheld grayscale scanner for IBM PCs and compatible computers. It can interpret 256 continuous tones of a photograph using a hardware method instead of a software method. It scans an image with 400-dpi resolution. The scanner comes with OCR software, which supports most common fonts, typefaces, and character sizes ranging from 8 to 36 points. A unique feature of the software is that it can append and merge functions, allowing the user to sew together text from multiple vertical or horizontal scanner passes. The software can read at 20 to 80 sec/page on 80286 or 80386 computers with a minimum of 2M bytes of memory. The scanner has a scan width of 4.1 in., and it can scan a page as long as 14 in. A window on the scanner permits visual scan alignment. The scanner measures 5.4 x 1.3 x 5.6 in., and it weighs 0.7 lbs. \$399.

Asuka Technologies Inc, Von Karman Commerce Center, Suite 110, 17145 Von Karman Ave, Irvine, CA 92714. Phone (714) 757-1212. Circle No. 387

To get a good idea of what a great idea we have in Image Watches... paste your color logo here.



OR EVEN BETTER

Send us your color logo

(Any size letterhead, photo, brochure, artwork)

along with U.S. \$16.50 ea. (Tax, Shipping included) and we'll rush you a personalized working quartz watch sample as our convincer!

Your company logo in full color is the dial of a handsome wristwatch. Gold plated case, genuine leather band, battery powered quartz movement with 1 year limited warranty. Men's and women's sizes. Remarkably inexpensive even in small quantities.

A timely idea for -

- Incentive
- Premium
- Dealer/Loader
- Business Gift
- Convention or Meeting Giveaway

Catalog sheet and details on request.

Limit: 2 samples per company @ \$16.50 each

IMAGE™ WATCHES, INC.

Suite 302, 400 Atlantic Blvd.
Monterey Park, CA 91754
Attn: Mr. Newberry
(213) 726-8050

9am - 5pm Mon. - Fri., Pacific Coast Time

Logo Watch
Leader for over
10 Years


© Image™ Watches, Inc.
all rights reserved

Unconditional Money Back Guarantee

CIRCLE NO. 17

NEW PRODUCTS

INTEGRATED CIRCUITS

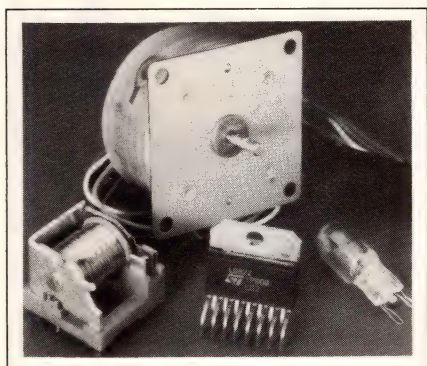

Smart-Power Chip

- Rated at 750 mA/driver
- Includes diagnostic functions

Featuring eight low-side drivers in a single 15-lead multiwatt package, the L9822 smart-power chip can deliver 750 mA continuously from each driver. All eight drivers can operate simultaneously. The device is controlled through a 4-wire serial bus, which is used both to load a control byte and read a status byte. This diagnostic feature allows a microcontroller to detect fault conditions due to overloads or open-circuit outputs. When an overload is detected, the device turns off the faulty driver to prevent damage. The chip's outputs are also protected by internal 34V zeners that suppress overvoltages caused by inductive loads. \$3.50 (1000).

SGS-Thomson Microelectronics, 1000 E Bell Rd, Phoenix, AZ 85022. Phone (602) 867-6100. FAX (602) 867-6290. **Circle No. 373**


1M-Bit Flash Memory

- Features small die size
- Has 90-nsec speed

Fabricated in 1.0- μ m CMOS, the Am28F010 1M-bit flash memory has a die size of about 45k mil². The next smallest competitive offering has a die size of about 60k mil², according to the company. The device also features an access time of 90 nsec; its nearest competitor has an access time of 120 nsec. The device

is rated at 12V and organized as 128k \times 8 bits. It is available in three temperature ranges. Package options include 32-pin DIPs, plastic leaded chip carriers, and LCCs. From \$18.20 (100).

Advanced Micro Devices, 901 Thompson Pl, Sunnyvale, CA 94088. Phone (800) 222-9323; in CA, (408) 732-2400. **Circle No. 374**

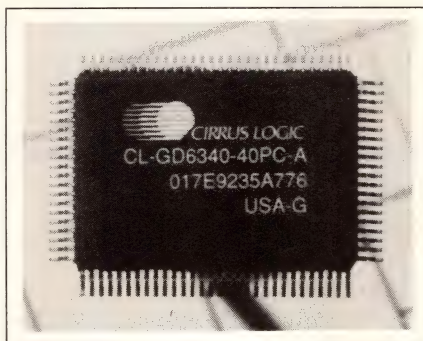

Color LCD Interface Controller

- Provides as many as 256 colors
- Has 64 shades of gray

Used as an interface controller between a VGA controller and an LCD panel, the CL-GD6340 provides digital signals for a color or monochrome LCD and analog signals for CRT presentation. In accordance with the VGA standard specifications, the chip allows the simultaneous display of as many as 256 colors. The chip can also produce 64 shades of gray on monochrome panels. Although its primary application is expected to be in active-matrix thin-film-transistor LCDs, the interface controller supports other LCD panels such as multiplexed supertwist types. In addition to its ability to drive both an LCD panel and a CRT screen at the same time, the chip is also usable with other display technologies, including gas plasma and electroluminescent panels. Included in the CL-GD6340 is a complete RAM D/A converter with a color look-up

table. 100-pin quad flatpack, \$68 (100).

Cirrus Logic Inc, 1463 Centre Pointe Dr, Milpitas, CA 95035. Phone (408) 945-8300. FAX (408) 263-5682. **Circle No. 375**


Dual-Channel 18-Bit ADC

- Conversion speed is 10 μ sec
- Input bandwidth is 50 kHz

Operating from a single 5V supply, the AT76C120 A/D converter features 18-bit resolution, a conversion speed of 10 μ sec, and an input bandwidth of 50 kHz. The device has a guaranteed linearity accuracy of 15 bits and can resolve input signals of <10 μ V. The ADC provides system designers with 96,000 18-bit conversion samples/sec on each of its two channels. Other features include a minimum S/N ratio of 86 dB and a 2's-complement format for the device's digital-output code. In a 24-pin plastic DIP, \$25 (1000).

Atmel, 2125 O'Nel Dr, San Jose, CA 95131. Phone (408) 441-0311.

Circle No. 376

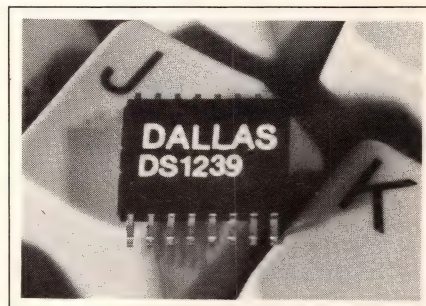

"Kickstarter" Chip

- Moves control to the keyboard
- Isolates ac power line

The DS1239 MicroManager chip contains special circuitry that cold-starts a computer from the keyboard. In addition to convenience, the chip enhances safety by keeping 110/220V ac power cabling distant from the person activating the on/off switch. When equipment power

Our Competitor's Manufacturing Plant.

PC chip sets from UMC cost up to 30% less than you're probably paying right now.

The reason? Our major competitor merely *designs* chip sets. We design *and* manufacture them—in the most advanced semiconductor manufacturing facility in the world. So when you buy from us, there's no third-party markup.

We can make consistent, reliable, high-volume deliveries of very high quality PC chip



sets—and we can do it all on short notice.

If you'd like to get the kind of price breaks that come when the designer and manufacturer are

under one roof, call us today: 408-727-9589.

UMC Full Line Of Chip Sets

Model	Speed (MHz)	Chips per set	Total IC's
PC/XT	10	1	15
286/AT	12	3	8
286/AT	16/20	4	25
386SX/AT	16/20	2	12
386/AT	25/33	5	13/30
486/AT	40	—	—

Not including CPU, DRAM, EPROM, and keyboard decoder.




UNITED MICROELECTRONICS CORPORATION

©1990 United Microelectronics Corporation.

CIRCLE NO. 88

ULTRA-MINIATURE SURFACE MOUNT

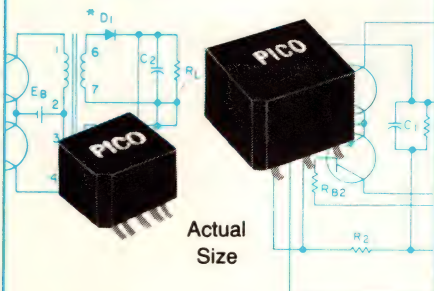

Actual
Size

DC-DC Converter Transformers and Power Inductors

These units have gull wing construction which is compatible with tube fed automatic placement equipment or pick and place manufacturing techniques. Transformers can be used for self-saturating or linear switching applications. The Inductors are ideal for noise, spike and power filtering applications in Power Supplies, DC-DC Converters and Switching Regulators.

- Operation over ambient temperature range from -55°C to $+105^{\circ}\text{C}$
- All units are magnetically shielded
- All units exceed the requirements of MIL-T-27 ($+130^{\circ}\text{C}$)
- Transformers have input voltages of 5V, 12V, 24V and 48V. Output voltages to 300V.
- Transformers can be used for self-saturating or linear switching applications
- Schematics and parts list provided with transformers
- Inductors to 20mH with DC currents to 23 amps
- Inductors have split windings

Delivery—
stock to
one week

SEE EEM.
THOMAS REGISTER
OR SEND DIRECT FOR
FREE PICO CATALOG

PICO
Electronics, Inc.
453 N. MacQuesten Pkwy. Mt. Vernon, N.Y. 10552

Call Toll Free **800-431-1064**
IN NEW YORK CALL **914-699-5514**

CIRCLE NO. 18

INTEGRATED CIRCUITS


is off, a pushbutton closure is detected by the chip, which then sources a small amount of energy from a 3V lithium battery. This energy lights an optoisolator to kick on a triac, which powers up the system. The chip also monitors a second pushbutton to reset a processor when the operator wants to intervene. The DS1239 also has provisions to monitor power. If the 5V power supply dips out of tolerance, a warning signal interrupts the processor, allowing for storage of information in nonvolatile RAM. \$3.50 (1000).

Dallas Semiconductor, 4350 S Beltwood Pkwy, Dallas, TX 75244. Phone (214) 450-0448. FAX (214) 450-0470. Circle No. 377

16k-Bit Quad-Port RAM

- Has four 256 \times 16-bit segments
 - Handles clock rates to 20 MHz
- The PDSP16520 quad-port RAM contains a total of 16k bits of dual-port static RAM arranged in four 256 \times 16-bit segments. These segments are supported by two 16-bit input buses and two 16-bit output buses, with each memory quadrant accessible from any of the input and output ports. In order to synchronize all events to a common system clock, the chip's address, data, and control inputs together with its data outputs are fully registered. The system clock initiates the memory cycles; data rates to 20 MHz are possible. Within this 20-MHz clock period, the circuit can read data from any two of the memory blocks as well as write new data to any two blocks. Separate inputs for both read and write addresses are available and, when both addresses specify the same location, the circuit reads the old data before writing new data. As a further aid to system integration, the user can program a delay between 0 and 15 clock cycles before the write operation specified on the input pin actu-


Technical calculations made easy!

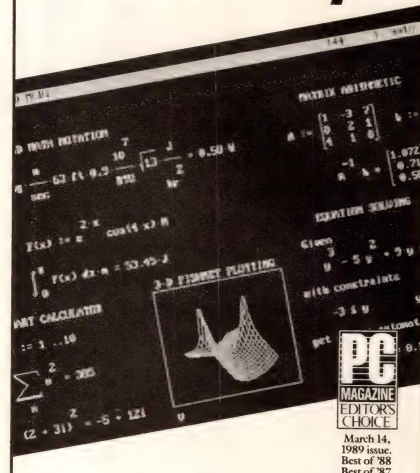

Perform engineering
and scientific
calculations faster...
and with fewer errors.

- MathCAD 2.5 does your numerical analyses quickly, easily... and inexpensively! The live document interface™ lets you integrate equations, text, and graphics on your computer screen. You can see what you solve... and update your equations and graphs with a single keystroke.
- You do the thinking while MathCAD does the work. MathCAD picks up where calculators and spreadsheets leave off. With over 120 commonly-used functions built-in, MathCAD can handle your formulas, exponentials, differentials, cubic splines, FFTs, and matrices.
- Applications Packs customize MathCAD to your work. Seven different packs are available for electrical, mechanical, and chemical engineering and other technical applications.
- MathCAD works on your PC, Macintosh, or UNIX workstation. More than 100,000 engineers and scientists are already using MathCAD to turn their computers into powerful workstations that can handle virtually any technical application.

Call 800-MathCAD, ext. 335
to request a free demo disk!



In Massachusetts, call
617-577-1017, ext. 335.

For a free MathCAD
Introductory Kit, clip
this coupon and mail
it back to us. Or
circle your reader
service card.

☐ Yes! Tell me more about MathCAD!

Name _____
Title _____
Company _____
Address _____
City _____ State _____ Zip _____
Phone (____) _____


MathSoft
201 Broadway
Cambridge, MA 02139
#13 EDN10/90

CIRCLE NO. 19

EDN October 1, 1990

ally occurs. The PDSP16520 comes in a 144-pin pin-grid-array package. £150 (100).

Plessey Semiconductors Ltd, Cheney Manor, Swindon, Wiltshire SN2 2QW UK. Phone (793) 518000. **Circle No. 378**

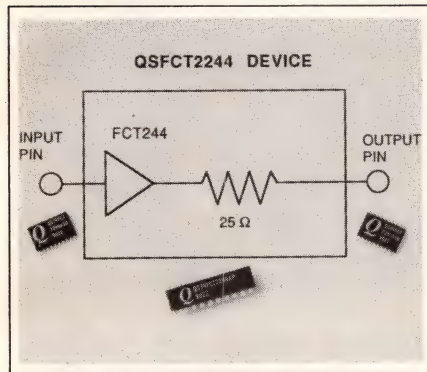

Logic Family With Built-In Resistors

- Saves board space
- Reduces ground bounce

A family of FCT2000A logic devices comes with built-in 25Ω series resistors to save board space and reduce ground bounce, undershoot, and ringing. Ground-bounce noise is limited to 0.8V, with similar reductions in the other parameters. The devices are particularly useful in high-speed, high-capacitance load applications such as static-RAM and dynamic-RAM arrays in RISC and CISC systems. Worst-case delays are 4.8 nsec for the FCT2244A buffer, 5.2 nsec for the FCT2373A latch, and 6.5 nsec for the FCT2374A register. Available in plastic DIPs, ZIPs, and SOIC packages. \$3.38 to \$5.96 (100).

Quality Semiconductor Inc, 2946 Scott Blvd, Santa Clara, CA 95054. Phone (408) 986-8326. FAX (408) 496-0591. **Circle No. 379**

14-Bit S/D Converter

- Comes in a small-size package
- Has a velocity-output pin

Based on a proprietary single-chip monolithic R/D converter, the hy-

brid SDC-14570 Synchro/Resolver-to-Digital Converter comes in a space-saving 1×0.8-in. package. The device also features a 4V velocity-output signal with a linearity of 1% that you can use to replace a tachometer. The converter is available with operating temperature ranges of 0 to 70°C and -55 to

+125°C. You can also order the device with MIL-STD-883 screening. The converter comes in a hermetic 26-pin double DIP. From \$330. Delivery, stock to 60 days ARO.

ILC Data Device Corp, 105 Wilbur Pl, Bohemia, NY 11716. Phone (516) 567-5600. FAX (516) 563-5699. **Circle No. 380**

The Ultimate VMEbus Tool Set




Based on the VBT-321 Advanced VMEbus Analyzer, VMETRO's Modular VMEbus Analyzer System offers piggyback modules for all kinds of VMEbus development, verification and tuning purposes.


VMETRO's Modular VMEbus Analyzer System gives you unrivalled measurement capability in a single VMEbus slot. Pick the right piggyback module to the VBT-321 VMEbus Analyzer and obtain:

- * VMEbus Anomaly Trigger
- * VSB State Analysis
- * VME Cycle Generator
- * 100MHz VME Timing Analysis
- * P2 General Purpose Analysis
- * 256K Trace w/SCSI dump


VMEbus Anomaly Trigger reveals incompatibilities and spec. violations.



Combined VMEbus State trace and 100MHz Timing Waveform.



Real-time VMEbus histograms shows bus usage, event counts, etc.



VMETRO

The Bus Analyzer Specialist

VMETRO AS
Sognsveien 75, N-0855 Oslo 8, Norway
Tel.: +47 2 39 46 90. Fax.: +47 2 18 39 38

VMETRO, INC
2500 Wilcrest #550, Houston, TX 77042
Tel.: (713) 266 6430. Fax.: (713) 266 6919


LITERATURE

Test-Instrument Brochure, App Note For Test Setup

These two publications provide complementary information on how to solve the problem of characterizing ICs with a stimulus-response setup. The 4-pg brochure *How are You Going to Test This?* describes the HP 8131A programmable pulse generator and the HP 54120 family of high-frequency digitizing oscilloscopes. Application Note 381, *A Test Setup for Characterizing High-Speed Logic Devices*, explains a characterization of a GaAs flip-flop using the instruments discussed in the brochure.

Hewlett-Packard, 19310 Pruneridge Ave, Cupertino, CA 95014.

Circle No. 388

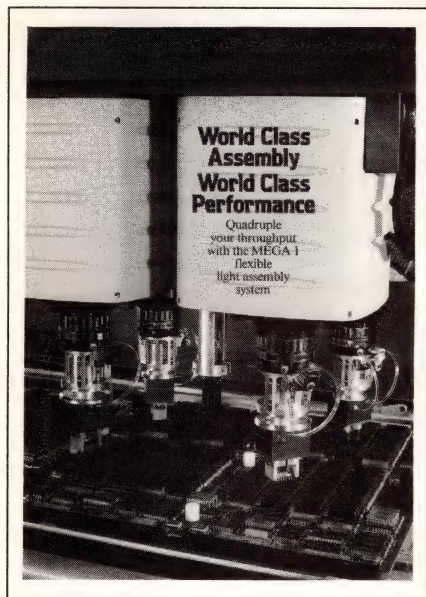

Anticollision Software Presented

The 6-pg foldout brochure *World Class Assembly, World Class Performance* covers the Mega 1 robotic multiple-head system for complex assemblies in manufacturing applications, including electronics and automotive production. The publication explains how the software uses bidirectional linear motors, frictionless air bearings, and anti-collision technology to operate as many as four robotic heads simulta-

neously. It also describes an optional vision system that allows single-move parts positioning. The brochure's 4-color photos illustrate the unit's programming, which uses the industry-standard C language.

Megamation Inc., Box 2328, Princeton, NJ 08543.

Circle No. 389

Publication Presents Gauging System

This 14-pg brochure features the Metro Program of incremental-length gauges for checking the accuracy of other gauges and inspection equipment. The 4-color publication provides specifications, descriptions, and illustrations.

Heidenhain Corp., 115 Commerce Dr, Schaumburg, IL 60173.

Circle No. 390

Charting Your Way To Data-Bus Products

This data-bus product-selection chart provides an at-a-glance guide to more than 30 characteristics of data-bus products for MIL-STD-1553 applications. Color-coded tabulations highlight the 2-sided chart, which lists single and dual transceivers, bit processors, remote terminal units, interfaces, card assemblies, and testers.

ILC Data Device Corp., 105 Wilbur Pl, Bohemia, NY 11716.

Circle No. 391

Reprint Explains Stability Testing

Stability Testing of Type K, N, J, and E Thermocouples at 538°C is a reprint of a paper presented at the American Society of Mechanical Engineers Cogen-Turbo III Symposium. The paper's tables, graphs, and references illustrate the discussion in the text.

Thermo Electric, 109 N Fifth St, Saddle Brook, NJ 07662.

Circle No. 392



Foldout Guides You To Bus Testers For MIL-STD-1553

The *Engineer's Guide To MIL-STD-1553 Modular Bus Testers* tells you how to use the 1553 Bus Tester, which tests and evaluates 1553A/B terminals and systems. The 6-pg foldout brochure describes the Tester's capabilities and shows you how to economically match testing requirements with the proper Bus Tester model.

Test Systems Inc., 217 W Palmar, Phoenix, AZ 85021.

Circle No. 393

Military/Aerospace Relays Listed

The 32-pg catalog spotlights a range of relay lines for military and aerospace applications. The catalog covers time-delay, dry-reed, mercury-wetted, magnetic-polarized, and general-purpose relays. It also presents a line of relays that includes minigrid, TO-5 case, crystal-can, solid-state, RF and time-delay devices, power monitors, and voltage sensors. An index arranged according to military specifications and a cross reference to military part numbers help you select parts.

Struthers-Dunn Inc./Hi-G Co., Lambs Rd, Pitman, NJ 08071.

Circle No. 394

EDN PRODUCT MART

This advertising is for new and current products.

Please circle Reader Service number
for additional information from manufacturers.

DS-51



\$950

8051 IN-CIRCUIT EMULATOR


- Real-time and transparent Development System
- Serially linked to PC's and compatibles
- 64 Kbyte Internal Data and 64 Kbyte Internal Code Memory
- Symbolic Debugger, On-line Assembler and Disassembler
- C and PLM support with source and code windows

AVAILABLE: 32K-DEEP TRACE \$800, EPROM PROGRAMMER \$250

DEALERS INQUIRIES WELCOME

CEIBO 105 GLEASON RD. LEXINGTON, MA 02173
TEL: 617-863-9927 FAX: 617-863-9649

CIRCLE NO 325



"The Best 8051 Emulator"

NEW
30 MHz
REAL-TIME



8051

SEE EEM 89/90
Pages D 1324-1326

PC based emulators for the 8051 family

8031, 8032, 8051, 8052, 80C192/154/321/451/452/51FA/51GB/51S/517/53S/537/
552/562/852/851, 80532, 80C451/552/852/751/752/851, 8344, 87C451/552/751/
752, 8751, 8752, DS5000 + CMOS ... more.

- PC plug-in boards or RS-232 box.
- Up to 30 MHz real-time emulation.
- Full Source-level Debugger w/complete C-variable support.
- 48 bit wide, 16K deep trace, with "source line trace."
- "Bond-out" pods for 8051, 83C552, 83C451, 83C652, 83C751, 80C515/80C517, 83C752.

Prices: 32K Emulator 8031 \$1790; 4K Trace \$1495

CALL OR WRITE FOR FREE DEMO DISK!


Ask about our demo VIDEO

NOHAU
CORPORATION

51 E. Campbell Avenue
Campbell, CA 95008
FAX (408) 378-7869

*US only

CIRCLE NO 326

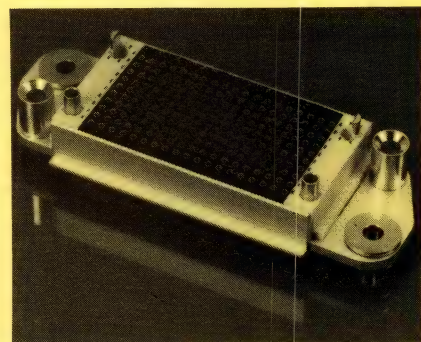

HIGH DENSITY - LOW INSERTION FORCE 70-350 POSITION BLIND MATALE CONNECTORS

N Series rack & panel connectors are available in 70, 110, 150, 190, 230, 270, 310 and 350 position models. The use of the Hypertac® LIF (Low Insertion Force) contact provides reliable operation without space consuming, expensive caming or jacking devices.

HYPERTRONICS CORPORATION
16 BRENT DRIVE, HUDSON, MA 01749
(508) 568-0451

CIRCLE NO 327

6809

Single Board Computer



6809 MPU, 2 serial ports, 4 parallel ports, RAM, EPROM, real-time clock, watchdog timer, 44-pin 4.5" x 6.5" PCB


EXPANSION MODULES: RAM, EPROM, CMOS RAM/battery, analog I/O, serial I/O, parallel I/O, counter/timer, IEEE-488, EPROM programmer, floppy disks, cassette, breadboard, keyboard/display.

WINTERK
Wintek Corp.
1801 South Street
Lafayette, IN 47904
800-742-6809

CIRCLE NO 328

Small But Mighty

High Level Language and Math Library
On a Tiny I/O-Rich Microcontroller



- 44 I/O Lines
- Floating Point Math
- Multitasking 68HC11
- 64K ROM, 128K RAM
- Resident Debugger

All the software you need for data acquisition, control, and instrumentation: high level FORTH language, assembler, debugging tools, multitasking, and extensive matrix math library including FFT and equation solution — all on the board.

Low power I/O-rich hardware: 8 A/D, 24 digital and 8 timer-controlled I/O lines, 2 serial links, 128K battery-backed RAM, only 300 mW, 3"x4".

The QED Board: OEM versions from \$495 (100s).

Mosaic Industries Inc. 415/790-1255
5437 Central Ave. Suite 1, Newark, CA 94560

CIRCLE NO 329

EUROPEAN-STYLE TERMINAL BLOCK (STRIPS)

Curtis Industries announces a complete catalog describing its new line of low cost European-Style electronic terminal blocks (strips). These PA Series terminals are available on typical 5mm, 5.08mm, 10mm, 10.16mm and other centers. Variations include P.C. mount, disconnect P.C. mount, vertical, horizontal and 45° wire connections. Tapered openings for quick connection, captivated screw to prevent loss, and nickel or tin plated brass terminals for highly corrosive applications. Interlock and single piece moldings in lengths up to 24 positions.



Curtis Industries


P.O. Box 19910, Milwaukee, WI 53219-0910
(414) 649-4200 Fax: (414) 649-4279
TWX: 610-262-3035

CIRCLE NO 330

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

Analog Circuit Simulation

Completely Integrated CAE from \$95



From Schematic
Entry through
SPICE
Simulation to
Post Processing

IsSPICE \$95, the
complete SPICE
program, runs on all
PC's.

IsSPICE/386 \$386, The fastest PC based SPICE program available. Has virtually no circuit size limitations.

SPICENET \$295, a schematic editor for any SPICE simulator. Generates a complete SPICE netlist.

INTUSCOPE \$250, a graphics post processor that performs all the functions of a digital oscilloscope.


PRESPICE \$200, extensive model libraries, Monte Carlo analysis, and parameter sweeping.



Please Write or Call
P.O. Box 6607 (213) 833-0710
San Pedro, CA 30 Day Money
90734-6607 Back Guarantee

CIRCLE NO 331

PC Communications Coprocessors




Our communications coprocessors offload serial and parallel communications tasks from PC's used in dedicated applications. RS232 and RS485 style communications. Easily programmed using C. A memory mapped interface to the host PC allows high speed data transfer and simple buffer schemes. From 64k to 512k of memory local to the coprocessor but accessible from the host PC. Used in many industrial and business systems to dramatically improve performance compared to standard PC serial port implementations.

Z-World Engineering

1340 Covell Blvd., Davis, CA 95616
(916) 753-3722
Fax: (916) 753-5141

CIRCLE NO 332

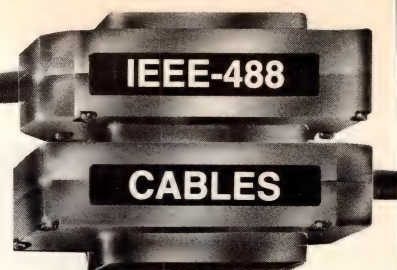

IEEE-488, (GP-IB, HP-IB) CABLES

- Reliable gold plated contacts.
- Durable metal connectors.
- High strength strain reliefs.
- Two shields for high noise immunity.
- Custom lengths at low prices.



Capital Equipment Corp.
Burlington, MA. 01803

Informative catalog 800-234-4232
Applications help (617) 273-1818

CIRCLE NO 333

100 MHz Waveform Digitizer



STR★8100

STR★832

STR★825

The fastest A/D boards for
your data acquisition needs.

- transient rates of 25, 32, and 100 MHz at 8 bits
- time equivalent sampling rates up to 800 MHz
- bus interface allows 1.5 MHz throughput rates
- many trigger modes; 64K memory per channel
- XT, AT & 386 compatible; prices from \$1750
- free drivers and digital oscilloscope software
- perfect for radar, ultrasound, ATE, robotics ...


SONOTEK

8700 Morrisette Drive, Springfield, Virginia 22152
703-440-0222 ■ Telex 910-250-5257 ■ Fax 703-440-9512

CIRCLE NO 334

How To Get More Emulation for Less

ORION 8620 ANALYZER-EMULATOR

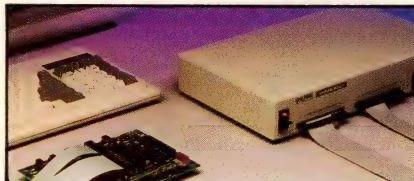

- High-Level language/Symbolic debug support
 - Over 170 processors supported with the same base hardware and software environment
 - Easy-to-use, powerful triggering
 - Extensive MACRO capabilities
 - Program Performance Analyzer
 - Built-in EPROM programmer
- Go ahead and compare. The 8620 Analyzer-Emulator gets your product to market faster and costs less. Base prices start at \$5080. Send for more information and free demo disk.

Toll Free 800/729/7700
or 415/327/8800

ORION
INSTRUMENTS

180 Independence Dr., Menlo Park, CA 94025

CIRCLE NO 335

EMI? Take One - Pass FCC

Now in the USA the patented Filmac® EMI filters from Japan. Find out why they are used by most big Japanese makers to pass FCC class B.

- Low cost
- Capacitor like construction
- Distributed low pass filter
- Sales over 1 million pcs /month
- Better results than built up filters


Free! 26 piece sample kit. Call today.

800-899-7888

Zyrel, Inc.

1900 McCarthy Blvd.
Suite 201
Milpitas, CA 95035

CIRCLE NO 336

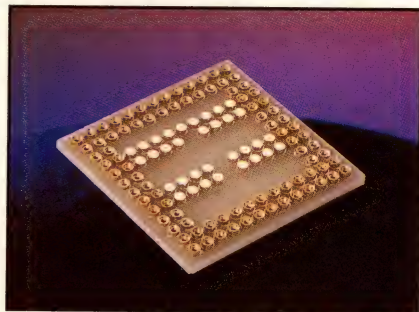

Over 150 Prototyping Adapters


- Adapt-A-Boards™ make it easy to adapt standard or high-density prototyping boards to a variety of packages.
- For all package types: LCC, PLCC, PGA, PQFP, SDIP (shrink DIP devices), SOIC and more!
- Bottom configurations adapt to wire wraps or solder tail pins. Boards conform to Mil-C-45204.
- Quick turnaround on custom engineering services, if needed. For a free catalog, contact:

Emulation Technology, Inc.
2368-B Walsh Ave. Santa Clara, CA 95051
Phone: 408-982-0660 FAX: 408-982-0664



CIRCLE NO 337

ES - BOX - SYSTEM

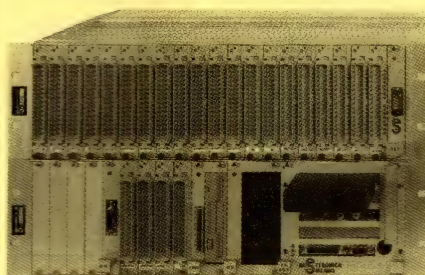

EUROCARD
SMP BUS
WITH 2ND
CPU OPTION



BUFFERED OR
DUAL PORT
CONNECTION

THE RELIABLE AND
POWERFUL WAY TO USE A
PERSONAL COMPUTER IN
INDUSTRIAL ENVIRONMENT

- * word, byte and BIT digital I/O for easy and fast software
- * Diagnostic signature on every I/O card
- * Multiprocessor with dual port connection
- * Complete software support

AVAILABLE PERIPHERALS


- * 6 ENCODER CONTROLLER
- * 16 THERMOCOUPLE CONTROLLER
- * DIGITAL AND ANALOGIC I/O
- * HARD DISK MODULE
- * NETWORK CARDS (NOVELL, 10 NET)
- * RS232 CARD, REAL TIME CLOCK....
- * 3 AXES CONTROLLER
- * FLOPPY MODULE
- * EPROM-RAM DISK CARD
- * MEMORY CARD

ELETTRONICA SILLARO S.R.L.
COMPUTER PERIPHERALS AND
INDUSTRIAL AUTOMATION
VIA MEUCCI, 11
40024 CASTEL S. PIETRO T.
(BO) ITALY
TEL 0039 51 940609
FAX 0039 51 941737
TLX 510160 ELSIL I
WE ARE LOOKING FOR DISTRIBUTORS

CIRCLE NO. 338

To advertise in Product Mart, call Joanne Dorian, 212/463-6415


Cover Your Design Bases
1-800-553-9119

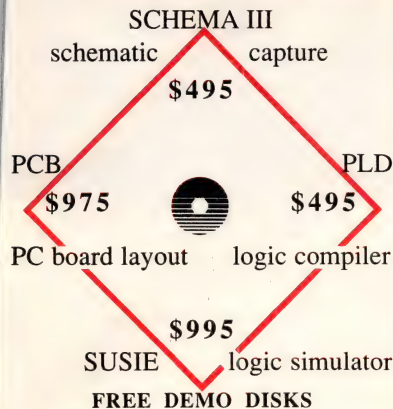

CIRCLE NO 340

**EXPRO-40 PC-Based
Universal Device Programmer
& Tester**

\$525

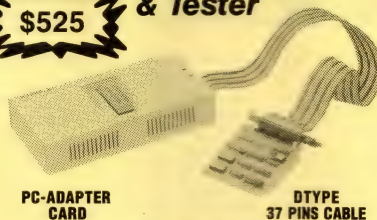

PC-ADAPTER
CARD

DTYPE
37 PINS CABLE

**8 SOFTWARES AVAILABLE FOR
POPULAR DEVICE PROGRAMMING**

EPROM: NMOS or CMOS EPROM: 2816, 17A, 64A, 256A...
BPPROM: From 32x 8 to 4096 x 8 Bipolar PROM MMI, NS,
Signetics, TI, AMD, Motorola, Harris, Cypress MPU 8748:
8748, 48H, 49H, 41A, 42H, 41AH, 42AH, 48AH, 49AH
MPU 8751: 8751/H, 52/H, 44/H, 51BH, 52BH, C51, C252
PAL, EPLD, GAL, CMOS PAL: MMI, NS, TI, AMD, Cypress,
Lattice, 16R8, 20V8, 20L10, 22V10, 22G10, 16V8, 20V8.
IC Tester: 74xx, 40xx, 45xx, DRAM

Songtech International, Inc.

44061 So. Grimmer Blvd., Fremont, CA 94538
Tel: (415) 770-9051 Fax: (415) 770-9060

CIRCLE NO 341

CHIPSAFE™

For Safely Storing, Organizing, Archiving and Transporting Your Components



Our handsome, Crushproof, Dust-Tight, Snap-fastened IC Storage albums
with ESD protection are the perfect solution for physically and electrically
protecting your library of MASTERS, MODS, REVS and samples.

Product	Model	Size	Chip Capacity (DIP) 8 pin 16 pin 28 pin 40 pin	Features	Price (1-4)
ChipSafe™	100	7" x 10"	528 264 76 56	Maximum IC storage	\$ 16.95
ChipStore™	200	7" x 10"	264 132 38 28	Combination IC & diskette storage	\$ 16.95
ChipCarry™	300	5" x 6"	120 70 15 12	Briefcase size IC storage	\$ 12.95
ChipPocket™	400	3" x 4"	55 26 7 5	Shirt pocket size	\$ 6.95


iTOI

ENTERPRISES P.O. Box 59, Newton Highlands, Massachusetts 02461 (617) 332-1010

CIRCLE NO 342

**PROTOCOL ANALYZER
UNDER \$200**

- Baud Rate Analysis
- Data Monitoring in Hex or ASCII
- Generate Test Data Strings
- Displays on Oscilloscope
- Battery Powered
- Automatic/Manual Modes
- Diagnose Serial Communications
- Optional Display and Break-Out Box



Call 1-800-572-1028 for complete information
and the name of your local distributor




GLOBAL SPECIALTIES

70 FULTON TERRACE
NEW HAVEN, CT 06512

CIRCLE NO 343

**EXTRUDED ALUMINUM
PANEL MOUNT ENCLOSURES**

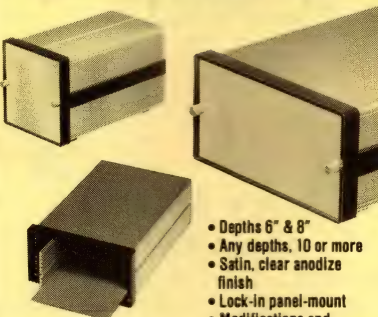

- Depths 6" & 8"
- Any depths, 10 or more
- Satin, clear anodize finish
- Lock-in panel-mount
- Modifications and screen printing available

DIN STANDARDS

Bezel	Case
48 x 96 mm	44 x 91 mm
72 x 144 mm	67 x 136 mm
96 x 192 mm	91 x 184 mm
96 x 96 mm	91 x 91 mm
	184 x 184 mm

FREE CATALOG

Buckeye
555 Marion Road
Columbus, OH 43207
614/445-8433

CIRCLE NO 344

**Tango-PLD. The New
Price/Performance Leader.**

Tango-PLD, a universal PLD design tool with sophisticated features at an affordable price, creates complex designs with multiple PALs and GALs. Our top-down approach, emphasizing logic description first and part selection second, along with a "C-like" design language, makes Tango-PLD easy to use.

Tango™

Describe designs with Boolean equations, truth tables, state machines, high-level C expressions, or existing JEDEC files. Simulation with test-vector coverage checking guarantees no surprises. Rich functionality, one year's updates, free tech support and BBS, plus our 30-day guarantee. All this for just \$495. Call today.




FREE EVALUATION PACKAGE

800 433-7801 619 554-1000 619 554-1019 Fax

ACEC™ Technologies ■ 6825 Flanders Drive ■ San Diego, CA 92121 USA
International prices may vary. Contact us for the distributor nearest you.

CIRCLE NO 345



8051 Emulator - \$1250

d²ICE is a low cost, Full Speed, real time 8051 Emulator.. Powerful user interface for Hi-level multi-window source code debugging. Uses IBM-PC COM1/2. No Slots! Portable, fits in shirt pocket. Assembler and test bed included.



Cybernetic Micro Systems

PO Box 3000 • San Gregorio CA 94074
Ph: (415) 726-3000 • Fax: (415) 726-3003

CIRCLE NO 346

Elegant, concise, fast & standardized
FLOATING POINT
libraries for embedded applications

Based on the IEEE 754 standard, FPAC (32 bit) and DPAC (64 bit) libraries are mature, well documented, and fully tested. The libraries are fully ROMable and include the following:

- Basic Operations
- Square Root
- Trigonometric
- ASCII Conversion
- Integer Conversion
- Logarithmic

U S Software supports most Intel, Motorola, Zilog and Hitachi micros, including 80X86, 80386, 680X0, 80960, 8051, 8096, 68HC11, Z80, 6809 and 6301.

For additional information, please contact:



U S SOFTWARE

United States Software Corporation
14215 NW Science Park Drive
Portland, Oregon 97229
800-356-7097
503-641-8446
503-644-2413 (FAX)

CIRCLE NO 347

8051

**PC BASED
EMULATORS**



**MetaLink™...Originators of the
PC Based 8051 Emulator**

We have more 8051 emulators than anyone in the world: 8031, 8051, 8032, 8052, 8344, 8044, 80C152JA/BJ/CD, 83C152JA/JC, 80C452, 80C51FA, 8051S, 8053S, 80512, 80532, 80513, 80C517, 80C521, 80C541, 80C321, 8053, 80C154, 80C451, 80C552, 80C562, 80C652, 80C751, 80C752, 80C537, CMOS, EPROMs, OTPs

Call or write for Free demo diskette

1-800-METAICE®



MetaLink Corporation P.O. Box 1329, Chandler, AZ 85244-1329
(602)926-0797 FAX: (602)926-1198 TELEX:498050 MTLNK
*Price is U.S. list

- Source Level Debug for PL/M and 'C'
- Source Level trace
- Debug with symbols, not HEX data
- Source Level disassembly with in-line assembler
- Interchangeable probe cards
- Up to 128K emulation memory
- 20 Mhz real-time emulation
- Up to 4K trace buffer
- Performance analyzer
- TRUE 8051 Emulation including all I/O ports, idla, power down, DMA, and WatchDog timers at NO additional cost
- Breaks set symbolically
- Fully documented
- Serially linked to PC
- OEM supplier to 8051 IC manufacturers
- Unlimited FREE technical support
- From \$1495*

**NOW
80C552 & 80C517
SUPPORT**

CIRCLE NO 348

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

TLX01A inserts a telex in your PC



Telex interface with double or simple current (V11, V24/28) • Processor Z180
• Battery backup RAM memory • 2 auxiliary serial ports • PC-AT/XT, PS/2 30 or compatibles • Complete with communication software • Manufacturing license available.
EXOR, P.O. Box 548, West Chester, OH 45069, USA. Fax: 513-874-3684
Phone: 513-874-4665

EXOR
Electronic R&D

CIRCLE NO 349

NEW FOR 1990-91 NANOSECOND PULSE GENERATORS

OUR FREE 16-PAGE "NEW FOR 1990-91" CATALOG DESCRIBES 38 NEW MODELS FOR LASER DIODE DRIVING, HIGH-VOLTAGE GATING, SEMI-CONDUCTOR DEVICE TESTING, ULTRASONICS, AND OTHER APPLICATIONS. WE NOW OFFER OVER 180 PULSE, IMPULSE, MONOCYCLE, DELAY GENERATORS, AND SAMPLERS, AMPLIFIERS, TRANSFORMERS, BIAS INSERTION UNITS, AND RELATED ACCESSORIES.




AVTECH
ELECTROSYSTEMS

P.O. Box 265, Ogdensburg,
New York 13669
(315) 472-5270

P.O. Box 5120, Station F
Ottawa, Canada K2C 3H4
(613) 226-5772
Fax: (613) 226-2802

CIRCLE NO 350

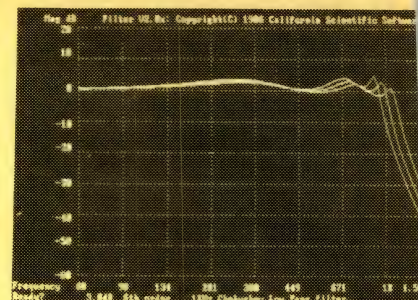


Advanced Engineering Software Call for Free Demo Disk

- Filter designs active, passive, and digital filters up to order 30. Draws Bode and transient plots from \$650
- Micro-CSMP models any system. Support for non-linear behavior \$900
- BrainMaker neural network solves control & image processing problems. Menu-drive, mouse \$195

California Scientific Software
10141 Evening Star Dr. #6
Grass Valley, CA 95945
FREE Catalog: (916) 477-7481

CIRCLE NO 751

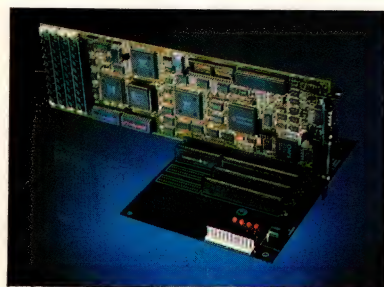

20 MHz 286 CPU CARD — \$595

- 2 Serial/1 Parallel Ports
- Up to 4 Meg DRAM: 0/1 WS
- Low Power 6-layer PCB
- Award BIOS — Norton SI 21.1
- Optional 287 Co-Processor
- Small Size (XT-Form Factor)
- User Replaceable Battery
- Made in USA
- \$595 qty 10 w/OK




295 Airport Road **TEMPUS TECH, INC.**
Naples, FL 33942

1-800-634-0701

CIRCLE NO 752

Design:

Industry-standard
language for PLDs



With new ABEL-PLD at just \$895*.

- 150 PLD architectures supported (over 4000 devices).
- Uses ABEL™ Hardware Description Language (AHDL).
- Intelligent synthesis and optimization.
- Upgradable to full-featured ABEL.

Call for your FREE
ABEL-PLD demon-
stration diskette.

1-800-247-5700

*U.S. list price only.

DATA I/O
Corporation

CIRCLE NO 753

Program:

16L8, 20V8, 22V10,
27C020, and 450
other CMOS devices



PLDs and memories with the low-cost 212.

- Memory cards for easy updates.
- Extensive editing capabilities.
- Compatible with JEDEC standard programming files.

Call for your FREE
15-day trial AND
ABEL-PLD demon-
stration diskette.
1-800-247-5700

DATA I/O
Corporation

CIRCLE NO 754

\$249. TERMINAL



- Featuring
- Standard RS-232 Serial Asynchronous ASCII Communications
 - 48 Character LCD Display (2 Lines of 24 Each)
 - 24 Key Membrane Keyboard with embossed graphics
 - Ten key numeric array plus 8 programmable function keys
 - Optional RS-422 multidrop protocol mode
 - Keyboard selectable SET-UP features — baud rates, parity, etc.
 - Size (5.825" W x 6.9" D x 1.75" H). Weight 1.25 lbs.
 - 5 x 7 Dot Matrix font with underline cursor
 - Displays 96 Character ASCII Set (upper and lower case)
 - Optional Bar Code Wand (shown)

COMPUTERWISE, INC.

302 N. Winchester • Olathe, KS 66062 • 800-255-3739 • FAX (913) 829-0810


CIRCLE NO 755

IMPROVE BOARD PERFORMANCE

MICRO/Q 1000 capacitors can be retrofitted to solve noise problems on existing boards. Because MICRO/Q 1000 caps share mounting holes with existing IC pins, no board redesign is required. Effective decoupling becomes a matter of adding one insertion step.

**Rogers Corp., 2400 S. Roosevelt St.,
Tempe, AZ 85282. 602/967-0624**

CIRCLE NO 756

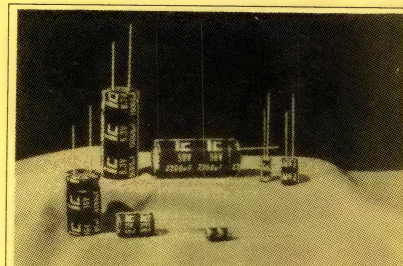

TYPE RMR +105°C SUBMINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

- 100% Burn-In Tested
- 0.47 Mfd. to 15,000 Mfd.
- 6.3 WVDC to 450 WVDC
- -40°C to +105°C Min.
- Tolerance: ±20% Std. (±10% Opt.)
- ≤0.002CV or 2 µA Min.
- Solvent Tolerant End Seal (≤250 WVDC)
- Tape & Reel/Ammo Pack Avail.




ILLINOIS CAPACITOR, INC.
3757 West Touhy Avenue,
Lincolnwood, IL 60465
(708) 675-1760 FAX (708) 673-2850

CIRCLE NO 757

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

FREE SAMPLE

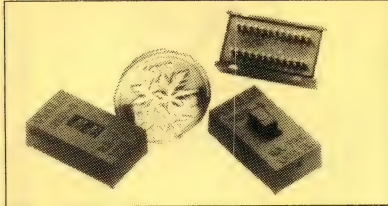


8PDT "BYTE WIDE" SWITCH HIGH DENSITY .050" PINOUT SNAP ACTION GOLD CONTACTS

Circle reader service number for free sample and complete information about Annulus High Density Switches.

ANNULUS
HIGH DENSITY SWITCHES

Annulus Technical Industries, Inc.
1296 Osprey Drive P.O. Box 7407
Ancaster, Ontario, Canada L9G 4G4
Tel (416) 648-8100 FAX 648-8102

CIRCLE NO 758

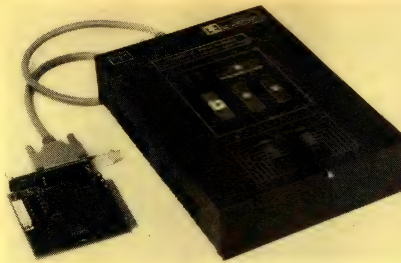

PC BASED UNIVERSAL DEVICE PROGRAMMER

\$695/895

- Programs EE/PROMs, PALs, GALs, EPLDs, MICROs, BIPOLARS, PEELs.
- Software driven pin drivers, D/A generated programming voltages (8 bit DACs used to generate voltages from 5.25V with 81V resolution for all 40 pins).
- Upgradeable for virtually any future programmable devices up to 40 pins.
- Self substituent operation. No additional modules or pin-in adapters required.
- Includes user friendly MEMORY BUFFER FULL SCREEN EDITOR.
- Commands include: Fill, Move, Insert, Delete, Search, ASCII or HEX entry.
- Friendly Menu-Driven interface. Device selection by PIN and manufacturer.
- Supports 81632 bit data word formats.
- Programming algorithm: Normal, Intelligent I&II, Quick Pulse Programming.
- Verify operation performed at normal & worst case operating voltage.
- Functional test: JEDEC standard functional testing for logic devices.
- TTL Logic functional test for 74xx/54xx series devices.
- File formats accepted: JEDEC (full), JEDEC (kernel), Straight Hex, MOS Technology, Motorola Hex, Intel Hex, Tektronix Hex.
- Customer support via voice line, fax & dedicated BBS. Full 1 year warranty.
- Base price \$695 includes interface card, cable, Memory/Micro/Bipolar library and 1 year free updates. \$895 with additional Logic Device Library.
- Library updates can be received via floppy or Customer Support BBS.

MC/VISA/AMEX

Call today for datasheets!




B&C MICROSYSTEMS INC.
750 N. Pastoria Ave., Sunnyvale, CA 94086 USA
TEL: (408) 730-5511 FAX: (408) 730-5521

CIRCLE NO 759

Combine Your Product Mart Ads

In EDN's Magazine
and
News Editions for
higher impact and a
lower rate.

CIRCLE NO 761

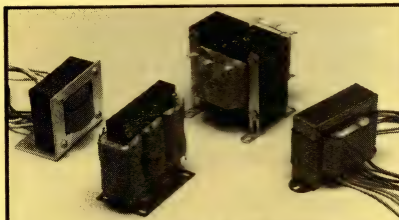

Our custom transformers offer you quality and reliability at a competitive price.

These quality custom transformers are designed to your specifications on E and I laminations. They are available in large and small production quantities and are competitively priced.


- Power Size - 5VA to 2,000VA
- Lamination Sizes - E + I, UI, EE, 3 Phase
- Lamination Material - Non-Oriented, Grain Oriented, Nickel

For technical information and free catalog call:
Gettysburg Transformer Corp., 1380 Old Harrisburg
Road, P.O. Box 4356, Gettysburg, PA 17325, Phone
(717) 334-2191, FAX (717) 334-4961

GETTYSBURG TRANSFORMER CORP.
(Since 1966)

CIRCLE NO 762

Analog Designers... COMTRAN® is



**Now On
The 386™**
• COMTRAN® is fast. Each plot here was generated on screen in 6 seconds. Optimized in under 3 min. with 25 MHz 386/387 (or HP 310).

- Interactive, intuitive AC circuit analysis with component entry, editing, analysis, optimization, and user scaled Linear/Log graphics in one program.
- Can create, capture and analyze time domain data, then use it to stimulate your circuit and plot the result in either time or frequency domain.
- Modular-Ready-to-use packages start at under \$1000.

COMTRAN® Integrated Software

A Division of Jensen Transformers, Inc.
10735 BURBANK BLVD, N. HOLLYWOOD, CA 91601
FAX (818) 763-4574 PHONE (213) 876-0059

COMTRAN® Jensen Transformers, Inc. • 386™ Intel Corporation

CIRCLE NO 760

LEMO'S NEW CIRCULAR CONNECTOR CATALOG

LEMO's new circular connector catalog highlights expanded shell and insert designs. Insert configurations are available in single, multi or mixed designs including signal, coaxial, triaxial, high voltage, fiber optic and fluidic/pneumatic. Shell styles are available in standard chrome plated brass, anodized aluminum or stainless steel.



P.O. Box 11488, Santa Rosa, CA 95406
Phone (800) 444-LEMO, Fax 707/578-0869

CIRCLE NO 763

There is a Difference. Lifetime Free Updates

**PLD-1100
\$798**



A programmer is not just another programmer. That is why BP Microsystems is committed to bringing our customers the highest quality programmers at an affordable price. The PLD-1100 Logic Programmer supports virtually every 20- and 24-pin logic device currently available. And, all of our programmers include free updates to support future chips as they become available and an unconditional money back guarantee.

BP MICROSYSTEMS
1-800-225-2102
(713) 451-9430

CIRCLE NO 764

ICs PROMPT DELIVERY!!! SAME DAY SHIPPING (USUALLY) QUANTITY ONE PRICES SHOWN FOR SEPT. 2, 1990

OUTSIDE OKLAHOMA: NO SALES TAX

DYNAMIC RAM			
4M Board for hp LJ's w/2MB			\$175.00
SIMM 2M IBM PS/2 Model 70			195.00
SIMM 1M AST Prem386/33MHz			140.00
SIMM 1Mx9	80 ns		60.00
SIMM 256Kx9	100 ns		20.00
1Mbit	1Mx1	60 ns	11.95
1Mbit	1Mx1	80 ns	6.25
41256	256Kx1	80 ns	2.95
41256	256Kx1	100 ns	2.15
41256	256Kx1	120 ns	1.95
4464	64Kx4	100 ns	2.20
41264*	64Kx4	100 ns	5.95
EPROM			
27C1000	128Kx8	200 ns	\$15.00
27512	64Kx8	200 ns	7.10
27256	32Kx8	200 ns	5.40
27128	16Kx8	250 ns	3.75
STATIC RAM			
62256P-10	32Kx8	100 ns	\$6.50
6264P-12	8Kx8	120 ns	4.25

OPEN 6 DAYS, 7-30 AM-10 PM SHIP VIA FED-EX ON SAT.

SAT DEL ON
FED-EX ORDERS
RECEIVED BY:
Th 52 \$8.25 4.00
Pr: M1 \$17.00 1.00
COD AVAILABLE

MasterCard/VISA or UPS CASH COD
MICROPROCESSORS UNLIMITED, INC.
24,000 S. Peoria Ave.
BEGGS, OK 74421
(918) 267-4961
No minimum order. Please note: prices subject to change!
Shipping, insurance extra, up to \$1 for packing materials

CIRCLE NO 765

NEW NEW NEW NEW NEW

Telecom Design!

INTEGRATED CMOS

DTMF RECEIVER



M-8870 is a full DTMF receiver that integrates bandsplit filter and digital decoder on one 18-pin CMOS DIP.

- Low power consumption (35 mW max.)
- On-chip differential amplifier, clock generator, and latched 3-state bus
- 5 volt power, 3.58 MHz TV crystal
- Low cost


For more info call: 1-800-426-3926

TELONE®

10801-120th Avenue NE, Kirkland, WA 98033
Phone: 206-827-9626 Fax: 206-827-6050

CIRCLE NO 766

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

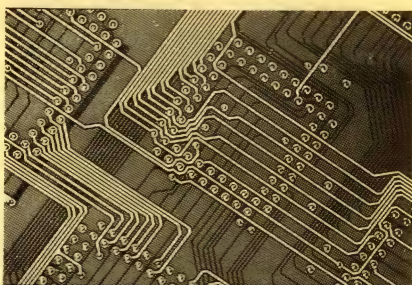

Your reliable & economic source for printed circuit boards.

We offer a wide range of double-sided & multilayer PCBs with high reliability fast service, top quality and competitive price. We can help you become more effective & profitable through the next decade. Don't hesitate! Contact us now!

SALES AGENTS WANTED.

GLOBAL PMX CO., LTD.
12TH FL. NO. 689, CHUNG SHAN N. RD.
SEC. 5, TAIPEI, TAIWAN, R.O.C.
TEL: 886-2-8356244 FAX: 886-2-8356254

CIRCLE NO 767

BIOS SOURCE CODE

The AT BiosKit gives you a complete Bios with source code in C you can modify for your own applications! The BiosKit includes a Bios on diskette ready for programming Eproms, and includes the utilities you need to Rom the source code. The Bios also has a Rom Monitor/Debug and Setup. At last you have control over the core of your system. Over 380 pages, with diskette, \$199. The XT BiosKit is only \$99. The Intel Wildcard Supplement for the XT BiosKit is \$49. Software tools: You need MS C and MASM 5.1 for modifying the Bios.

FREE We'll include a free copy of the pocket-sized XT-AT Handbook by Choisser and Foster with each BiosKit if you mention this ad when you order. Of course, this \$9.95 value is also available by itself. Or buy five or more for only \$5.00 each.



800-462-1042
In California 619-271-9526



Annabooks

12145 Alta Carmel Ct., Suite 250
San Diego, CA 92128

Money-back guarantee

CIRCLE NO 768



Multi-Tasking EXECS

U S Software offers hi-performance software tools for embedded applications.

Get the full details by calling:

800-356-7097

503-641-8446

503-644-2413 (FAX)



U S SOFTWARE

United States Software Corporation
14215 NW Science Park Drive
Portland, Oregon 97229

CIRCLE NO 769

RS-422/RS-485 Boards for AT, Micro Channel

RS-422/RS-485 asynchronous serial communication boards from Quatech available in 1 to 4 ports for PC-AT and compatibles and 1 to 4 ports for PS/2 Micro Channel.

Call for our free
PC Interface Handbook:
1-800-553-1170



662 Wolf Ledges Parkway
Akron, OH 44311

PC-AT, Micro Channel, and PS/2 are trademarks or registered trademarks of IBM Corp.

CIRCLE NO 770

Wave Form 20MHz - 32K \$1290

The WSB-100 Wave Form Synthesizer Board from Quatech has the best set of numbers in the market. With speed to 20MHz and a 32K memory at \$1290, it's making waves in more ways than one. The WSB-100 is also a star performer as a digital pulse/word generator with the optional digital module.

Call for our free
PC Interface Handbook
1-800-553-1170




662 Wolf Ledges Parkway
Akron, OH 44311

CIRCLE NO 771

Synchronous Communication Boards for AT

Quatech synchronous/asynchronous serial boards for PC-AT and compatibles support RS-232, RS-422, and RS-485 communication.

Call for our free
PC Interface Handbook:
1-800-553-1170



662 Wolf Ledges Parkway
Akron, OH 44311

PC-AT and PC are registered trademarks of IBM Corp.


CIRCLE NO 772

Create a DISKLESS PC

It's EASY...It's SIMPLE.....
THERE's Nothing to it!!!

PROMDISKtm III

IBM PC DISK EMULATOR CARD



- * On-Board BIOS ROM
- * IBM PC/XT/AT Compatible
- * Mix EPROMs, EEPROMs, SRAMs
- * Emulates up to 1,024Mbyte Drive
- * Occupies 32K PC address space
- * Supports popular Byte-Wide chips
- * Includes PROMDISKtm III Software

For Information Call or Write:
MICRO COMPUTER SPECIALISTS, INC.
810-208 Los Vallecitos
San Marcos, CA 92069
(619) 744-8087


CIRCLE NO 773

UNIPRO,

the PC/XT/AT/386 based universal programmer/tester programs PROMs, EPROMs, EEPROMs, up to 4MB and 32-bit wide, PALs, PLDs, GALs, EPLDs, PEELs, and Micro Controllers. JEDEC file compatibility and Test Vector verification allow the use of most popular PLD compilers. The unit also tests TTL/CMOS Logic ICs and Dynamic/Static RAMs. 40-pin Gold ZIF socket, built-in protection for short circuit and over current, high speed parallel interface to the PC, and menu-driven software are included at \$585.

XELTEK

764 San Aleso Ave
Sunnyvale, CA 94086
TEL (408) 727-6995
FAX (408) 727-6996

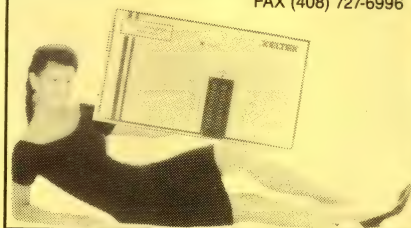

CIRCLE NO 774

Now
Networkable!

Facts about

500,000

ICs and Semiconductors at Your Fingertips

Cahners CAPS is the newest component search and selection tool for electronic design engineers:

- PC-driven, CD-ROM-based
- Includes unabridged manufacturers' datasheets
- Represents more than 450 manufacturers worldwide

Call toll-free: **1-800-245-6696**

CAHNER'S




Computer Aided
Product Selection

275 Washington Street
Newton, MA 02158-1630
Telephone: 617-558-4960
Facsimile: 617-630-2168
Telex: 940573

CIRCLE NO 775

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

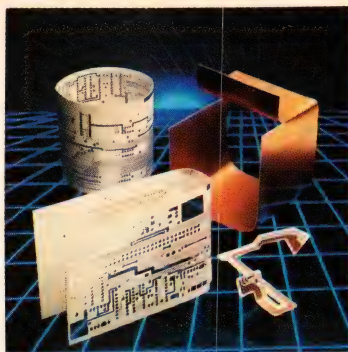

WE'RE BENDING THE RULES FOR CIRCUIT DESIGNERS

BEND/FLEX™, the bendable board material flexible enough to bend into any multi-plane shape. Eliminates stiffeners, flex-hardboard connectors. May reduce cost of two- and three-plane interconnect systems by as much as 30%!

Rogers Corporation Composite Materials Div.
Rogers, CT 06263. (203) 774-9605.

CIRCLE NO 776



Schematic Capture for the Macintosh

DESIGNWORKS

Schematic features Menu-driven, mouse-controlled operations • cut/copy/paste between circuits • right-angle rubberbanding. **Digital simulation** 13-state, event-driven simulation • logic analyzer-style timing window • PLD support. **Libraries** Fully-simulated 7400, 4000, 10K series, PLDs, PROMs and RAMs, non-simulated analog and discrete components • User-definable, simulated custom symbols. **Interfaces** Formats for Douglas CAD/CAM, Cadnetix, Calay, Orcad, Tango, Racal Redac, Spice. • user-definable printers, dot-matrix printers, HP, Houston, Roland pen plotters. **Requirements** Macintosh Plus, SE, II, IIfx, IIfx, or IIfx.

CALL (604) 669-6343 FOR YOUR
FREE DEMO DISK TODAY.

CAPILANO COMPUTING SYSTEMS LTD.

CIRCLE NO 777

IEEE 488

Easiest to use, GUARANTEED!

- IBM PC, PS/2, Macintosh, HP, Sun, DEC
- IEEE device drivers for DOS, UNIX, Lotus 1-2-3, VMS, XENIX & Macintosh
- Menu or icon-driven acquisition software
- IEEE analyzers, expanders, extenders, buffers
- Analog I/O, digital I/O, RS-232, RS-422, SCSI, modem & Centronics converters to IEEE 488

Free Catalog & Demo Disks
(216) 439-4091




IOtech • 25971 Cannon Rd. • Cleveland, OH 44146

CIRCLE NO 778

Communicate Weekly

to the electronics OEM through EDN's Magazine and News Editions Product Mart


CIRCLE NO 779



Free Catalog of DIGITAL I/O and ANALOG Input Interfaces for the IBM-PC,XT,AT and compatibles. Control relays, motors, lights, measure temperature and voltage. Sample programs and I/O circuits are included in catalog. John Bell Engineering, Inc. 400 Oxford Way, Belmont, CA 94002
(415) 592-8411

CIRCLE NO 782

200 MHz Logic Analyzer

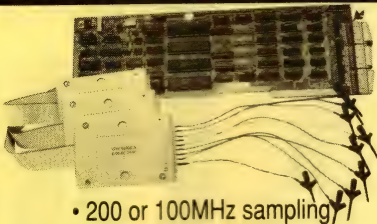


- 200 or 100MHz sampling
- 24 Channels
- Expansion to 72 channels
- 16 Levels of triggering
- 16K samples/channel
- Variable threshold levels
- 3 External Clocks
- 12 Clock Qualify lines

\$ 799-12100 (100 MHz)
\$1299-27100 (100 MHz)
\$1899-27200 (200 MHz)

UNIVERSAL PROGRAMMER

PAL
GAL
EPROM
EEPROM
PROM
87C51...
874x



\$475

5ns PALs 4 Meg EPROMs
26V12 & 22V10 Gals
FREE software updates on BBS

GANG PROGRAMMER


- 4 32pin Sockets (8 Socket option)
- 2716-27010 EPROMs

\$215

Call - (201) 994-6669
Link Computer Graphics, Inc.
4 Sparrow Dr., Livingston, NJ 07039 FAX:994-0730

CIRCLE NO 783

LOW COST Data Acquisition Cards for PC/XT/AT



12 Bit A/D & D/A [PCL711S] \$295

- A/D converter: 8 single-ended channels; Uses AD574 device; Conversion time less than 25µsec; Input range: ±5V; Software Trigger Mode only.
- D/A converter: 1 channel; 12 bit resolution; 0 to +5.10V Output Range.
- Digital I/O: 16 In/Out (TTL compatible); External Wiring Terminal Board incl.
- Utility Routines and Demo/Sample Programs for BASIC and Quick-BASIC.

12 Bit A/D & D/A [PCL812] \$395

- A/D converter: 16 single ended inputs; Uses AD574; Conversion time less than 25µsec; Built-in programmable pacer; Input Ranges: ±10V, ±5V, ±1V.
- D/A converter: 2 channels; 12 bit resolution; Output Range 0-5V.
- Digital I/O: 16In/Out (TTL compatible); Programmable Counter/Timer (8254).
- DMA and interrupt capability. Utility software and sample program in BASIC.

Fast 12 Bit A/D/A [PCL718] \$795

- A/D converter: 16 single ended or 8 differential channels; 12 bits resolution; Programmable scan rate; Built-in Interrupt and DMA control circuitry. Conversion speed 60,000 samples/sec (standard), 100,000 samples/sec (optional).
- Input Ranges: Bipolar: ±10V, ±5V, ±2.5V, ±1V, ±0.5V; Unipolar: 10.5, 5.2, 1V.
- D/A converter: 2 channels; Resolution: 12 bits; Settling time: 5µsec; ±5V.
- Digital I/O: 16In/Out (TTL compatible); Programmable Counter/Timer (8254).
- Software: Utility software for BASIC & QuickBASIC included. Sample prgm. Supported by LabDAS, ASSYST, LABTECH, UnitekScope.

6 Channel 12 bit D/A [PCL726] \$495

- Output Ranges: 0 to +5V, 0 to +10V, ±5V, ±10V, or sink 4-20mA.
- Settling time: 70µs. Linearity: ±1/2bit. Voltage output drive capacity: ±5mA.
- Digital I/O: 16 digital input and 16 digital outputs (TTL compatible).

MC / VISA / AMEX

Call today for datasheets!



B&C MICROSYSTEMS INC.
750 N. Pastoria Ave, Sunnyvale, CA 94086 USA
TEL: (408)730-5511 FAX: (408)730-5521

CIRCLE NO 781

48 CHANNEL 25 MHz LOGIC ANALYZER



PA480 \$1595.00 + POD PRICE

*New windows 3.0 compatible software.

- 48 Chnnls @25MHz x 4K word deep
- 16 Trigger words/16 level Trigger Sequence
- Storage and recall of traces/setups to disk
- Disassemblers available for: 68000, 8088, 8086, 68011, 68111, Z80, 8085, 6502, 6809, 6303, 8031

NCI □ 6438 UNIVERSITY DRIVE,
HUNTSVILLE, AL 35806
(205) 837-6667

CIRCLE NO 784

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

KEEPER of the FAITH



Richard Stallman is leading a crusade to preserve your programming freedom.

Jay Fraser, Associate Editor

Photography by Kevin Bryan

"We've come here today to warn the public of the terrible harm Lotus and other companies are doing to the software industry," shouted the intense man with the long, tangled, black hair.

The crowd of about 300 people cheered and applauded.

"We can win. We're going to have to work hard and get lots of other people to join with us, but we can do it," he went on.

Again the crowd cheered and waved signs reading "Stop Software Monopolies," "Lotus Interruptus," and "A Real Company Competes. Wimps Sue!"

This protest rally took place on August 2 in Cambridge, MA at the headquarters of Lotus Development Corp. Lotus was targeted because two months earlier it had won a lawsuit against Paperback Software International of Berkeley, CA for copyright infringement. Lotus claimed Paperback's VP Planner illegally imitated the commands and user interface of its popular 1-2-3 spreadsheet. The people at the rally viewed Lotus's suit as an attack on programmers' traditional freedom to write programs that are compatible with existing software.

"There are people here from New Hampshire and Maryland and from companies all around the Boston area. It makes me think of the Minutemen," the man shouted. "So let this be the shot heard round the world!"

The crowd cheered once more.

"Now let's spend the rest of the afternoon marching around the Lotus building chanting our hex chant," he said, finishing his speech.

A picket line formed on the sidewalk and began a chant based on the hexadecimal counting system.

"1-2-3-4 Kick the lawsuits out the door!"

5-6-7-8 Innovate don't litigate!

9-A-B-C Interfaces should be free!
D-E-F-0 Look and feel has got to go!"

The speaker at the rally was Richard Stallman, 37, a gifted programmer and tireless crusader for the freedom of anyone who writes or uses software. He is the founder of the Free Software Foundation (FSF) and cofounder and president of the League for Programming Freedom.

Stallman spends most of his time in a cluster of cramped offices near MIT (Cambridge, MA). The floors and furniture are strewn with last week's newspapers, empty Chinese food take-out cartons, and paperback science fiction novels. Stallman himself looks like he never left the late 1960s. For an interview he's barefoot. His unruly hair falls halfway down his back. And he wears a loose, unbleached cotton shirt with a button pinned on it that reads "Keep Your Lawyers Off My Computer!"

Stallman clears a space on a couch, sits down, and folds his legs under him. As he talks about programming freedom he speaks calmly, but with the same intensity he displayed at the rally.

"Any kind of monopoly on any activity is automatically an affront to individual freedom," he says, "and those things can only be justified when there's a public gain that's worth the price. I totally reject the idea that people are entitled to be paid whenever anyone benefits from something they have done. And, by the way, the American legal system also rejects that idea. There is no basis for it except in right-wing ideology.

"The Constitution, when it establishes the basis for patents and copyrights, says very clearly that they are not an entitlement," he adds. "They are something that can be established to promote progress. In other words, they are a means of altering the behavior of the pub-

lic for the public good. They are not a matter of fairness. No one is entitled to a patent, independent of whether the government sees fit to



establish them."

Stallman discovered the world of programming when he was 12 years old. At summer camp he came across a computer manual that belonged to one of the counselors. There were no computers at the camp, but that didn't deter him. Stallman devoured the book and began creating programs in his mind. He has been hooked ever since.

While he was in high school Stallman wrote programs for IBM. He went to Harvard University (Cambridge, MA) and graduated with a BS in physics in 1974. By then he was already working at the Artificial Intelligence Laboratory at MIT.

The 1970s were the glory years

of the AI Lab. A group of programmers who would become legendary gathered there under the extremely loose supervision of Professor

Marvin Minsky, known as the father of artificial intelligence. These hackers, as they proudly called themselves, explored the outer limits of what computers could do. Steven Levy wrote of them in his book *Hackers: Heroes of the Computer Revolution*: "Beneath their often unimposing exteriors, they were adventurers, visionaries, risk-takers, artists... and the ones who most clearly saw why the computer was a truly revolutionary tool."

The hackers in the AI Lab produced everything from elegantly written languages to sophisticated computer games to the powerful LISP (List Processing) machine, the AI programmer's dream computer. Something else came out of the AI Lab, too—the hacker

ethic. The hacker ethic was never codified or published or even written down. It evolved naturally from the temperaments and convictions of the people in the Lab, and it permeated the way they worked.

The hacker ethic is based on unlimited freedom of information and unhindered cooperation. If someone writes a program, the hackers believed, anyone else should be free to modify or expand it. In that way, programs will be refined and improved until the best possible version is created, and that program should also circulate freely. Working this way will prevent duplication of effort, promote creativity, and raise the level of programming for everyone.

PROFESSIONAL ISSUES

Richard Stallman is a true believer in the hacker ethic. While he was working at the AI Lab, he wrote a text-editing program called EMACS. He deliberately created it with an open architecture to encourage changes and additions, and he gave it away free as long as the people who received it promised to send him any improvements they made.

The development of the LISP machine eventually destroyed the original AI Lab. When a prototype of the computer was completed in 1979, the hackers who had worked on it agreed that they should start a company to manufacture and sell it. But they disagreed on what form the company should take. One faction wanted a small, loose-knit organization that operated in the same communal way as the AI Lab. The other faction wanted a larger, more conventionally structured firm with a professional management team brought in to take care of business matters. The two sides couldn't reach a compromise. They started different companies, LISP Machine Inc and Symbolics, and each came out with its own version of the LISP machine in the early 1980s.

The deep wound in the AI Lab never healed. What had once been a family eventually became two rival camps. The free flow of information stopped. Many of the hackers who remained were hired away by one company or the other. Work in the Lab practically ceased. The golden era was over.

Richard Stallman was the last of the original hackers to remain in the AI Lab. He was depressed and angered by its disintegration. He wasn't interested in going to work for someone else and he still held firmly to the hacker ethic, so there was only one thing for him to do.

"I decided that it wasn't worth continuing in the software field



without being able to cooperate with people and to write and improve whatever program you want to improve," he says. "I decided that I would make a new software-sharing community even if I had to write all the software myself."

Early in 1984 Stallman resigned

from MIT and founded the FSF. The goal of the organization is to develop a complete, Unix-compatible software system (called GNU for Gnu's not Unix) and give it away. The reason Stallman severed his ties with MIT was to make sure it would have no legal right to the software he intended to write.

The FSF has no members, just volunteers. It exists mainly on donations of money and equipment. Most of the money goes to hire programmers and technical writers. Stallman says the FSF has considerable support on campuses across the country and within the computer industry. For example, Hewlett-Packard recently donated \$100,000 and six of its 68030 workstations to the FSF.

Approximately two-thirds of GNU has been written and parts of it have already been distributed. In order to make sure that GNU programs circulate freely, Stallman has protected them with what he calls a "copyleft." A copyleft is a legal instrument that gives people the freedom to change and distribute GNU programs at will, but prevents anyone from trying to copy-right and sell or license a modified version.



AT&T's Multichip Module: One big

advantage on top of another.

AT&T's multi-layered, high-density POLYHIC technology gives you virtually limitless design possibilities.

Developed by AT&T Bell Laboratories, the POLYHIC is a thin-film packaging medium that accommodates far more circuitry than single-layer hybrid ICs.

Inside the POLYHIC package, fine-line conductor geometries maximize routing and interconnection density, reduce design complexity and enhance quality and reliability.


The POLYHIC also utilizes a patented polymer to enhance impedance control and flexibility. This allows high-density packaging of very-high-frequency digital and analog circuit functions—all compatible with a wide range of packaged or unpackaged silicon devices.

AT&T supports the designer with a depth of resources and capabilities, from development right on through manufacturing. And, for specific

project needs, we also offer the help of AT&T field application and AT&T Bell Laboratories engineers.

For more on how AT&T's Multichip Module can help make your most improbable designs possible, just give us a call at **1800 372-2447**.

The components of success.

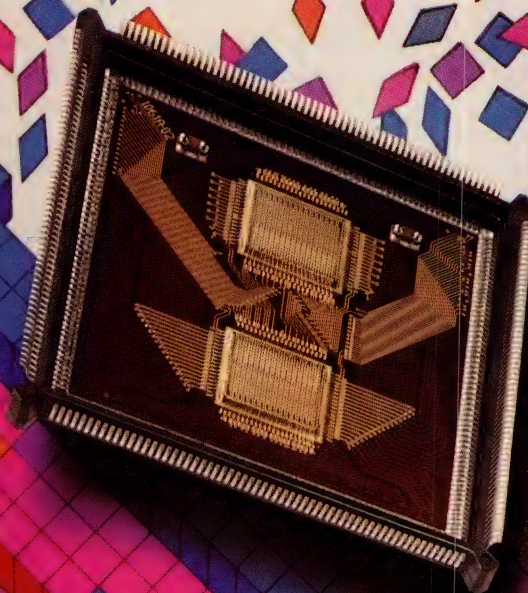

AT&T

The right choice.

PROFESSIONAL ISSUES

"People have the opportunity to join into cooperation," says Stallman, "but once they've decided to join into cooperation they can't turn around and start being uncooperative with somebody else. So all the improvements people make sort of add together and add together, making a constantly growing and constantly improving body of software."

Stallman's skills as a programmer could have made him wealthy a long time ago. Instead he has chosen to earn just enough money from consulting work to get by on and to live an almost ascetic lifestyle. Recently, however, he was given \$240,000 to use in any way he wants.

On July 17 the MacArthur Foundation in Chicago, IL announced that Stallman had been awarded a "genius fellowship" of \$240,000. These grants are given to, in the words of the Foundation, "exceptionally gifted individuals" to free them from economic constraints so they can devote themselves full-time to their pursuits.

Stallman is pleased with the grant and a little amused by it. "The money by itself doesn't really change anything for me," he says. "I'm not materialistic in the way a lot of Americans are, wanting as many possessions as possible. What I want is to be as far away from any worries about a shortage of money as possible."

Stallman hasn't decided what he's going to do with the money yet. He may use some of it to support programmers he knows. He may use some to learn how to play Indonesian gamelan music. The only thing he has definitely decided on is to travel to the Soviet Union to accept an invitation to speak about free software.

Recently, much of Stallman's time and effort have gone into fighting the attempts of some companies

to monopolize common user interfaces through copyrights. The demonstration in front of Lotus's headquarters was a protest against this new and controversial practice.

The case of Lotus vs Paperback Software was very important because although Paperback's program used a different code than that in Lotus 1-2-3, many of its commands and keystrokes were the same. Because of this similarity of "look and feel" the judge ruled that



Lotus's copyright had been violated. After its victory in court, Lotus immediately filed suit against two more small software companies. Also, Apple Computer is now suing Microsoft and Hewlett-Packard, alleging that those companies violated its copyright on the Macintosh computer interface. Stallman and others believe that a very dangerous precedent has been set.

"Restrictions like these can easily wipe out meaningful competition," says Stallman. "User interface copyrights can make it nearly impossible to compete with an established, standard product, because the users all know a certain set of commands. If you can't implement those commands, they won't want to relearn to switch brands."


"Imagine what it would be like for someone to try to make a typewriter with the keys arranged in a funny layout," he explains. "You can see what that would be like—utter havoc. The point is that people probably wouldn't even bother trying because it's so obviously not feasible."

In Stallman's eyes, another equally serious threat to software developers' freedom is software patents. The US Patent Office began granting patents on software in 1981. Thousands of them have been issued so far, and they cover many common and widely used functions.

"Natural-order recalc" is just one example. This feature recalculates all of the entries in a spreadsheet when a user changes one. It's now covered by a patent. If someone wishes to incorporate it into a program, he either has to pay a licensing fee or risk a lawsuit. Most programmers don't realize how many common techniques are now restricted by patents, and being unaware that a patent exists is no excuse before the law. You can still be sued.


The proliferation of patents could make writing software ruinously expensive. Software developers would have to license patents from dozens or even hundreds of holders. That alone would be costly. But to find out which patents might be infringed, developers also would have to conduct patent searches.

"If you wanted to write a program, say 50,000 lines long, you

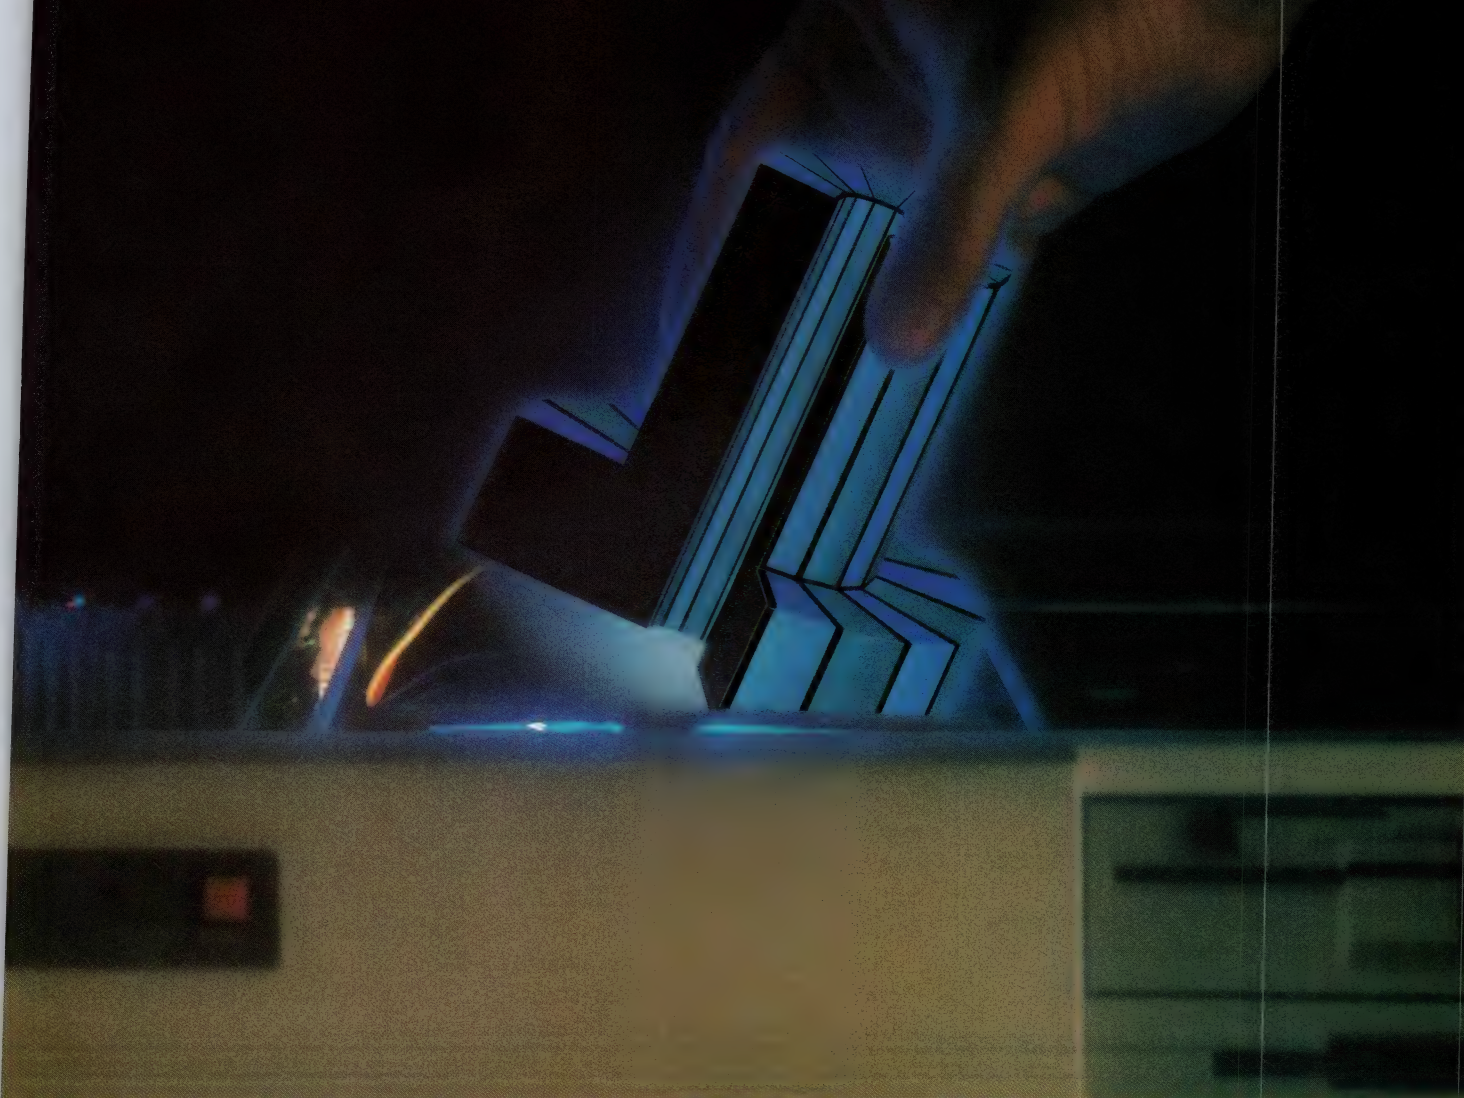

Could your system use a live-in supercomputer?

**33 MFLOP
PERFORMANCE NOW
AVAILABLE ON A
BOARD-LEVEL
PRODUCT!**



Complex applications can run at supercomputer speed on your AT – if you build in ASPI's Banshee® co-processor motherboard!

Banshee will pull your AT up to 33 MFLOP performance for such critical activities as image processing, speech recognition, robotics and other computation-intensive applications. DSP technology makes Banshee the ideal solution whenever high-speed high-volume calculations are required.

Plug Banshee into one of the expansion slots on your AT. Use the ASPI-provided development package (hardware, software, manuals, SPOX® C30 operating system and DOS shell program) to refine your application and go to work. With a variety of daughter-board options, you can also add such

enhancements as memory expansion, A/D-D/A and microprocessor capabilities. Enjoy supercomputer performance at only a fraction of supercomputer investment!

For detailed specs, prices and/or immediate shipment, contact Atlanta Signal Processors, Inc., 770 Spring Street, Atlanta, GA 30308. Telephone 404/892-7265. FAX 404/892-2512.



WORLD LEADERS IN DSP DESIGN TOOLS

Lowest Profile
0.5" ht.,
up to 55 Watts



PICO **AC-DC** **Power** **Supplies**

- **Input Voltage 90 to 130 VAC (47/440Hz)**
- **Single, Dual, Triple Outputs**
- **1200V Rms Isolation**
- **Low Isolation Capacity Available**
- **Continuous Short Circuit Protection**
- **High Efficiency**
- **Fully Regulated Voltage Outputs**
- **Operating Temperature -25°C. to +70°C. with No Heat Sink or Electrical Derating Required**
- **Expanded Operating Temperature Available (-55°C. to +85°C. ambient)**
- **Optional Environmental Screening Available**

PICO manufactures complete lines of Transformers, Inductors, DC-DC Converters and AC-DC Power Supplies

Delivery—
 stock to
 one week

PICO
Electronics, Inc.

453 N. MacQuesten Pkwy. Mt. Vernon, N.Y. 10552

Call Toll Free 800-431-1064

IN NEW YORK CALL **914-699-5514**

CIRCLE NO. 18

PROFESSIONAL **ISSUES**

might have in that program 100,000 basic components," says Stallman. "You'll have hundreds of techniques. You can have thousands of combinations of techniques that actually are meaningful associations. If you wanted to do a patent search for those it would cost you two or three thousand dollars each. Now you're talking about millions of dollars.

"And this would only enable you to find out what was patented, so you wouldn't use it," he adds. "That doesn't mean there'd be any other way to do things, and it doesn't mean that you can be sure. Whenever anybody's wrong there's a lawsuit that costs maybe half a million."

Beyond the issue of the sharply increased costs they would create, software patents and user-interface copyrights also strike right at the heart of everything Stallman cherishes most—the hacker ethic of co-operation, sharing, and a free flow of information.

To combat these threats, Stallman and two friends founded the League for Programming Freedom in October of 1989. In less than a year and with limited publicity the League has grown to 150 dues-paying members. Stallman receives about 20 letters each day seeking information about it.

"The League is an organization of programmers and users of computers who want to reverse the new monopolies that have recently been instituted—the user-interface copyrights and software patents," says Stallman. The League is growing rapidly "because people who didn't take the threat seriously now know that we can't expect the courts to understand the software field or respect the traditions of the field. People know it's up to them to solve the problem."

Stallman is guardedly optimistic about the future. "There's a good chance but not a great chance that the Supreme Court will overturn the lower court's decision," he says. The trend toward more software patents could also be reversed by other means. "It would be easy to reverse it. Congress could pass a law that patents don't apply to software," he explains. "The problem is that the few people who have something to gain from software patenting may be better organized and more aware of it than the many who have something to lose."

Is Richard Stallman making a futile attempt to recapture a lost utopia, or is he fighting a very important battle that he just might win? Time will answer those questions. Meanwhile he can usually be found in his cluttered office, writing programs for his free software system, answering inquiries about the FSF, and planning ways to mobilize public opinion in favor of programming freedom, still keeping the faith.

Article Interest Quotient
 (Circle One)

High 512 Medium 513 Low 514

WHAT'S COMING **IN EDN**

EDN's October 11, 1990, issue will feature a staff-written Special Report on video A/D converters. Part 3 of the real-time software programming series will discuss requirements models for formulating operating-system behavior. And EDN's DSP-chip directory will provide detailed descriptions of many DSP products.

See our
specs in
CAPS

Where can you
find specs on
ICs from every
semiconductor
advertiser in
this magazine?

... **in CAPS!**

Just over a year ago, we introduced CAPS™ – the PC-based system that revolutionized the integrated circuit search and selection process. Engineers loved it!

Today, CAPS gives you vital information on more than 500,000 parts from over 425 manufacturers worldwide. Plus, you get hundreds of thousands of digitally-stored images of complete manufacturers' datasheets. All delivered on CD-ROM discs and updated every month!

To make it easy, CAPS includes everything you need and runs on standard hardware like IBM® PC/AT™-style PCs, PC networks, and Sun-3™ workstations.

So, if you're looking for ICs and semiconductors, take a look at CAPS. We've got the best names in the business.

Find out more! For a free brochure, call 800-245-6696 today!

C A H N E R S



Computer Aided
Product Selection

Cahners Technical Information Service
275 Washington Street
Newton, MA 02158-1630
Telephone: 617-558-4960
Facsimile: 617-630-2168
Telex: 940573
800-245-6696

Look for ads from these IC and semiconductor manufacturers in this issue:

Advertiser	Page
AT&T Technologies	... 133, 177
Crystal Semiconductor	... 2
Exar	... 1
Fujitsu Microelectronics	... C2
Integrated Device Technologies	... 56
Intel	... 114
International Rectifier	... C3
Lattice Semiconductor	... 131
Motorola Semiconductor	... 18-19
Performance Semiconductor	... 97
Samsung	... 16-17
Sony	... 30
United Microelectronics	... 163

CAREER OPPORTUNITIES

1990 Recruitment Editorial Calendar

Issue	Issue Date	Ad Deadline	Editorial Emphasis
Magazine Edition	Nov. 8	Oct. 18	Signal Processing, Computer-Aided Engineering, Computers & Peripherals, Software, Wescon Show Issue
News Edition	Nov. 15	Oct. 26	Displays, Defense, Special Supplement: Interconnect
Magazine Edition	Nov. 22	Nov. 1	17th Annual Microprocessor Directory, ICs & Semiconductors, Test & Measurement, Workstations
News Edition	Nov. 29	Nov. 8	ICs/Communication Controllers/Microprocessors, DSP, Regional Profile: Illinois, Minnesota & Michigan
Magazine Edition	Dec. 6	Nov. 15	Product Showcase—Volume I: Software, ICs & Semiconductors, Packaging & Interconnect, Power Sources
News Edition	Dec. 13	Nov. 21	Power Supplies, Computers, Special Supplement: Salary Survey, Regional Profile: Florida
Magazine Edition	Dec. 20	Nov. 29	Product Showcase—Volume II: Test & Measurement, CAE Systems, Computers & Peripherals, Components

Call today for information on Recruitment Advertising:

East Coast: Janet O. Penn (201) 228-8610

West Coast: Nancy Olbers (603) 436-7565

National: Roberta Renard (201) 228-8602

EDN Magazine Edition News Edition Databank Professional Profile

Announcing a new placement service for professional engineers!

To help you advance your career, Placement Services, Ltd. has formed the EDN Career News Databank. What is the Databank? It is a computerized system of matching qualified candidates with positions that meet the applicant's professional needs and desires. What are the advantages of this new service?

- It's absolutely free. There are no fees or charges.
- The computer never forgets. When your type of job comes up, it remembers you're qualified.

- Service is nationwide. You'll be considered for openings across the U.S. by PSL and its affiliated offices.
- Your identity is protected. Your resume is carefully screened to be sure it will not be sent to your company or parent organization.
- Your background and career objective will periodically be reviewed with you by a PSL professional placement person.

We hope you're happy in your current position. At the same time, chances are there is an ideal job you'd prefer if you knew about it. That's why it makes sense for you to register with the EDN Career News Databank. To do so, just mail the completed form below, along with a copy of your resume, to: Placement Services, Ltd., Inc.

IDENTITY

Name _____ Parent Company _____
 Home Address _____ Your division or subsidiary _____
 City _____ State _____ Zip _____ Location (City, State) _____
 Home Phone (include area code) _____ Business Phone if O.K. to use _____

EDUCATION

Degrees (List) _____ Major Field _____ GPA _____ Year Degree Earned _____ College or University _____

EXPERIENCE

Present or Most Recent Position _____ From _____ To _____ Title _____
 Duties and Accomplishments _____ Industry of Current Employer _____

Reason for Change: _____

POSITION DESIRED

PREVIOUS POSITION:


Job Title _____ From _____ To _____ City _____ State _____
 Employer _____ Division _____ Type of Industry _____ Salary _____
 Duties and Accomplishments _____

COMPENSATION / PERSONAL INFORMATION

Years Experience _____ Base Salary _____ Commission _____ Bonus _____ Total Compensation _____ Asking Compensation _____ Min. Compensation _____
 Date Available _____ I Will Travel _____ ☐ Light ☐ Moderate ☐ Heavy ☐ I own my home: How long? _____ I rent my home/apr. ☐
☐ Employed ☐ Self Employed ☐ Unemployed ☐ Married ☐ Single Height _____ Weight _____
 Level of Security Clearance _____ ☐ U.S. Citizen ☐ Non-U.S. Citizen My identity may be released to: ☐ Any employer ☐ All but present employer
☐ WILL RELOCATE ☐ WILL NOT RELOCATE ☐ OTHER _____

EDN Magazine Edition News Edition

Databank A DIVISION OF
PLACEMENT SERVICES LTD., INC.
 265 S. Main Street, Akron, OH 44308 216/762-0279

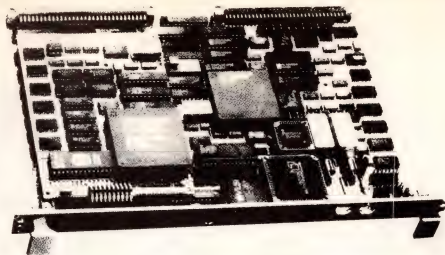

INTERPHASE

SEEKING SENIOR DESIGN ENGINEERS

INTERPHASE CORPORATION is seeking individuals to participate in the development of RISC—based FDDI VMEbus products. Position leads to project-level management of board-level and standalone FDDI products as well as opportunities in an existing well-established Ethernet product development organization. Familiarity with UNIX as a target environment (system level) with five years design experience required.

FIRMWARE/HARDWARE DESIGN

- Logic design using state-of-the-art CAD/CAE equipment.
- High-speed memory system design using VRAM.
- RISC microprocessor design experience desired.
- VMEbus architecture desired.
- C language programming experience required.
- BSEE or equivalent required. Emphasis on high-speed microprocessor development.

SOFTWARE DESIGN

- UNIX, Kernal I/O, TCP/IP or other protocol experience on super-microcomputer or mini-computer required.
- Minimum one year writing UNIX device drivers.
- C language programming experience required.
- RISC microprocessor desired; (M68000 required).
- BSCS or equivalent required. Emphasis on design of high-performance software interface.

Interphase Corporation offers competitive compensation and complete benefits, including a tax-deferred savings plan (401K), educational assistance, employee paid group insurance and much more.

For immediate consideration, use the coupon below and/or send your resume to:

**INTERPHASE CORPORATION
HUMAN RESOURCES DEPT.**

**13800 Senlac
Dallas, Texas 75234**

FAX # 214/919-9200—ATTN: HUMAN RESOURCES DEPT.

Interphase Corporation is an equal opportunity employer.

Name _____

Address _____

City _____ State _____ Zip _____

Telephone (Home) _____ (Business) _____

Position/s of Interest _____

Previous Design Experience _____

Many call. Only the best are chosen.

This ad is for managerial talent seeking high-tech opportunities that only start-ups can offer. (Start-ups that also happen to be located where the climate is kind, greenways are great and ocean beaches and mountain resorts are just a short drive away.)

Find your calling at Ericsson GE Mobile Communications in North Carolina. A joint venture between L.M. Ericsson of Sweden and GE, Ericsson GE is providing unlimited challenging opportunities at our Research and Development Center for digital cellular technology—a new state-of-the-art facility in Research Triangle Park, N.C.


At Ericsson GE, you can put your exceptional creative talents to work—you're at the hub of high tech-knowledgeableSM breakthroughs. And you can also enjoy the advantages of living in one of the country's most beautiful, exciting and affordable areas.

Challenge yourself. Call on your experience for these immediately available opportunities:

Director/Manager—Applied Research For Cellular Phone Systems

Applicants should have 10 or more years of advanced research and development experience in communications and signal processing with an established reputation as an outstanding researcher in the field of Cellular Phone Technology. A doctorate (or equivalent experience) in EE, physics or

related field is desirable. The successful candidate will direct the applied research effort of Ericsson GE's new North Carolina facility with initial key responsibility to staff the organization with outstanding applied researchers.



Manager—Cellular Phone Specifications

Applicants should have 8 or more years of experience in defining specifications for cellular phone systems and related products. A B.S. in EE with an advanced degree is highly desirable. The successful candidate will supervise, inspire and direct the effort in coordinating and integrating the appropriate specifications into the efforts of the design and development teams. The candidate must be articulate with excellent writing and negotiating skills, capable of providing technological insight both externally and internally.

We offer competitive salaries with an exceptional benefits package. If you're interested in any of these opportunities, send your resume, with salary history, to:

Ernie Leskovec, Ericsson GE Mobile Communications, Inc.
P.O. Box 13969, One Triangle Drive, Mail Drop NDE,
Research Triangle Park, NC 27709.

Discrete phone calls can be made directly to Ernie Leskovec at
(919) 549-7529 or 7530.

Principals only—please, no agency referrals.



FOR THE HIGH TECH-KNOWLEDGEABLESM

An Equal Opportunity Employer

ADVANCED MICRO DEVICES IS COMIN' THROUGH IN TEXAS!

AMD is a billion dollar high technology company with a solid business plan in place to take us through the '90s and beyond. EPROMs, microprocessors and PLDs will provide the volume. And we're focused on the leading edge technologies driving the fourth wave of computing—networked computers.

PRODUCT LINE OPENINGS:

Product Engineers

BSEE minimum; 3+ years microprocessor or digital IC experience. Analog positions also available.

Design Engineer

3-5 years CMOS chip design experience, including design with logic chips of 100,000 or more transistors. BS/MSEE.

Technical Marketing Engineer

Will develop introduction and maintenance plans for personal computer division. BSEE with at least 2-4 years experience in PC board design and/or PC marketing.

Senior Technical Marketing Engineer

Requires laser printer system design and/or firmware development background. BS/MSEE and 4+ years experience.

CAD Engineers

Requires CAD experience, preferably on Mentor Workstations and microprocessor design knowledge. BSEE/CS with 2+ years IC experience.

Telecom Applications Engineer

Assist customers in SLIC/SLAC designs and/or applications. Requires analog circuitry and digital design experience. BS/MSEE and 2+ years experience.

Safety Engineer

1-3 years experience. BS/MS in Safety Engineering. Some familiarity with fire and building codes.

Environmental Engineer

1-2 years experience; BS degree minimum. Experience in semiconductor environment strongly preferred. Must have familiarity with air abatement programs.

Network Engineer

1-2 years experience with the design and implementation of network configurations. Must have experience with ethernet, physical cabling and network protocols.

MANUFACTURING LINE OPENINGS:

Senior Facilities Engineer

5-8 years related semiconductor experience. BSEE/ME.

Equipment Maintenance Technician

Associates degree with 2+ years experience in diffusion, thin films, plasma etch or photolithography.

Parametric Test Engineers (Keithley)

Parametric Test, Device Physics background. BSEE/BS in Physics.

Process Development Engineers

3+ years experience in process development of polysilicon, nitride, silicide, metals and oxide. Basic understanding of DOE, manufacturability, SQC/SPC and process transfer a must. PhD or MS in technology-related discipline preferred.

Process Engineer

2-3 years experience in photolithography with ASM steppers preferred; BS/MSEE.

Fab Equipment Engineer

4+ years wafer fab experience required with specialty in wafer processing equipment; BS/MSEE.

Process Engineers

2-3 years experience in implant, thin films, diffusion, or etch in wafer fab area. BSEE/CE or Physics.

Qualified applicants should send a resume to: Advanced Micro Devices, MS-556, 5204 E. Ben White Blvd., Austin, Texas 78741. For product line openings, attn: Paul Maack or Scott Saunders and for manufacturing line openings, attn: Ed Moore. You may also call 1-(800) 531-5202 or FAX your resume to (512) 462-5108.

We are an equal opportunity employer.
Trademarks are registered to their respective companies.



Engineers

Technology moves fast at Ford

It takes a savvy engineer to keep up with the rapid technological advances happening at Ford Motor Company's Electronics Division. Our world class team of engineers is involved in projects that will reshape automotive transportation now and in the 21st century.

Ford engineers are refining and enhancing technological advancements such as multipoint electronic fuel injection, distributorless ignition systems and the electronic engine control unit (EEC-IV). Futuristic instrumentation displays will provide drivers with extended diagnostic capabilities and holographic heads-up information readouts. The performing arts are also taking on new shape through Ford engineering innovation. For example, Digital Audio Tape players (DAT) bring a touch of tomorrow to today's driver.

If you would like to take an active role in the way the world will drive in the 21st century, we invite you to join us. We prefer a BSEE, BSME, a minimum of 3 years related product design experience with an advanced degree preferred, and a background in one of these technological areas:

Air-Core Magnetic Gage Design
AM/FM RF and Audio Analog Circuit Design
Analog/Digital and Custom Integrated Circuit Design
Automated Controls System Engineering
Automated Software Assembly

Cellular Telephone Vehicle Applications
Computer Software Architecture Design
Electronics Components Packaging
Electronics Systems
EMC/Vibration Testing
Hardware and Software Development
Powertrain Controls System Engineering
SMT/PWB Manufacturing Process Development
Thick Film Circuits
Vehicle Controls Development
Vehicle Navigation/Remote Entry Systems
VLSI and Memory Component Testing

Our Southeastern Michigan location offers an excellent lifestyle with four beautiful seasons, a reasonable cost of living, several major universities, and a variety of social and cultural activities. The proximity of Detroit puts the sophisticated advantages of a major metropolitan area within easy reach. For more information on careers with the Electronics Division, send your resume in confidence to:

Ford Motor Company
Electronics Division
Product Engineering Office
Room E-130, EDN1001
Post Office Box 6010
Dearborn, Michigan 48121

By choice, we are an Equal Opportunity Employer.

Electronics Division



EDN's INTERNATIONAL ADVERTISERS INDEX

ACCEL Technologies Inc	169	3M Electrical Specialties Div	161
Actel	40-41	Marshall	32
Advanced Micro Devices	12-13	MathSoft Inc	164
Aerospace Optics	47	MCSI	172
American Automation	126	MetaLink Corp	169
Analog Devices Inc	79, 80-81, 82-83, 84-85	Micro Devices	113
Annabooks	172	Micro Power Systems	100
Annulus Technical Ind Inc	171	Micro Processors Unlimited	171
Antex Electronics	66	MicroSim Corp	77
Aries Electronics Inc	123	Mini-Circuits	
AT&T Technologies	133, 177	Laboratories	24-25, 34-35, 129, 188
Augat	125	Mosaic Industries Inc	167
Avtech Electrosystems Ltd	170	Motorola Computer Group	61-63
AVX/Kyocera	135	Motorola Semiconductor	
Bayer AG**	154B-C	Products Inc	18-19
B&C Microsystems	171, 173	NCI	173
Beckman Industrial Corp	111	NCR Corp	158-159
Behlman Engineering Corp	112	Nohau Corp	167
Bourns Trimpot/Networks	64	Northwest Airlines	28
BP Microsystems	171	Omaton Inc	169
Buckeye Stamping Co	169	Orbit Semiconductor	8-9
CAD Software Inc	112	OrCAD Systems Corp	67
Cahners CAPS	181	Orion Instruments	168
California Scientific Software	170	Pacific Hybrid Microelectronics	187
Capilano Computer Systems Inc	173	Performance Semiconductor Corp	97
Capital Equipment Corp	168	Philips Circuit Assemblies*	114
Cascade Microtechnologies	42	Philips Components**	C2
Ceibo Ltd	167	Pico	164, 180
Cetra	150	Pioneer Magnetics	160
Chomerics Inc	152	Qua Tech Inc	172
Computerwise Inc	170	Qualidyne Systems Inc	55
Comtran Integrated Software	171	Rogers Corp	170, 173
Connor Peripherals	26-27	Samsung Semiconductor	16-17
Crystal Semiconductor	2	SBE	95
Curtis Industries Inc	167	Siemens AG**	154D-E
Cybernetic Micro Systems	29, 169	Signetics Corp	36-37
Cypress Semiconductor	6	Siliconix Inc	4
Dale Electronics Inc	23	Songtech	169
Dallas Semiconductor	58	Sonotek	168
Data I/O Corp	170, C4	Sony Corp of America	30
Dexter Magnetics	145, 147	Standard Grigsby Inc	138
Du Pont Electronics	142-143	Standard Research Systems Inc	49
Du Pont Pixel Systems**	144	Teknor	141
Electronica Sillaro	168	Tektronix Inc	149, 151, 153, 155-157
Emerson & Cuming Inc	146	Teltone Corp	171
Emulation Technology Inc	168	Tempustech Inc	170
Exar Corp	1	Teradyne Inc	14-15
Exor	170	Texas Instruments Inc	71-74
Fujitsu Microelectronics Inc*	C2	UMC	163
Gettysburg Transformer Corp	171	US Industrial Distribution	142
Global PMX Co Ltd	172	US Software	169, 172
Global Specialties Corp	169	VMETRO Inc	165
Goldstar Technology*	51-54	Wall Industries	123
		Wavetek	3
		Western Digital	38-39
		Wintek Corp	167
		Xeltek	172
		Xilinx	99
		Zilog Inc	69
		Z-World	168
		Zyrel Inc	168
Integrated Device Technology Inc	56		
Integrated Silicon Systems	124		
Intel	114		
International Rectifier	C3		
Interphase Corp	148		
Intusoft	168		
IOtech Inc	173		
Itoi	169		
John Bell Engineering	173		
Kel Connectors Inc	66		
Kepeco Inc	136-137		
Lanier/Copier	109		
Lattice Semiconductor Corp	131		
Lemo USA Inc	171		
Link Computer Graphics Inc	173		

Recruitment Advertising 182-186

Advanced Micro Devices
Ericsson/GE Mobil Communications
Interphase Corp

*Advertiser in US edition
**Advertiser in International edition

This index is provided as an additional service. The publisher does not assume any liability for errors or omissions.

Presenting
the fastest,
most reliable,
most
powerful
hybrid
technology
you've
ever seen.

Want to see it again?

Just call 1-800-622-5574 and we'll demonstrate how we can now deliver multi-chip modules and multi-layer hybrids with 4 to 5 times greater density than standard hybrids, plus faster speed. And unbeatable reliability. All with our new super-compact hybrid technology. The fastest one in the West.

And everywhere else.

10575 SW Cascade Blvd. Portland, OR 97223
(503) 684-5657 FAX (503) 620-8051



PACIFIC HYBRID
MICROELECTRONICS


We do small miracles.

Copyright © 1990 Pacific Hybrid Microelectronics

CIRCLE NO. 27

SPDT & SP4T SWITCHES

WITH BUILT-IN DRIVERS

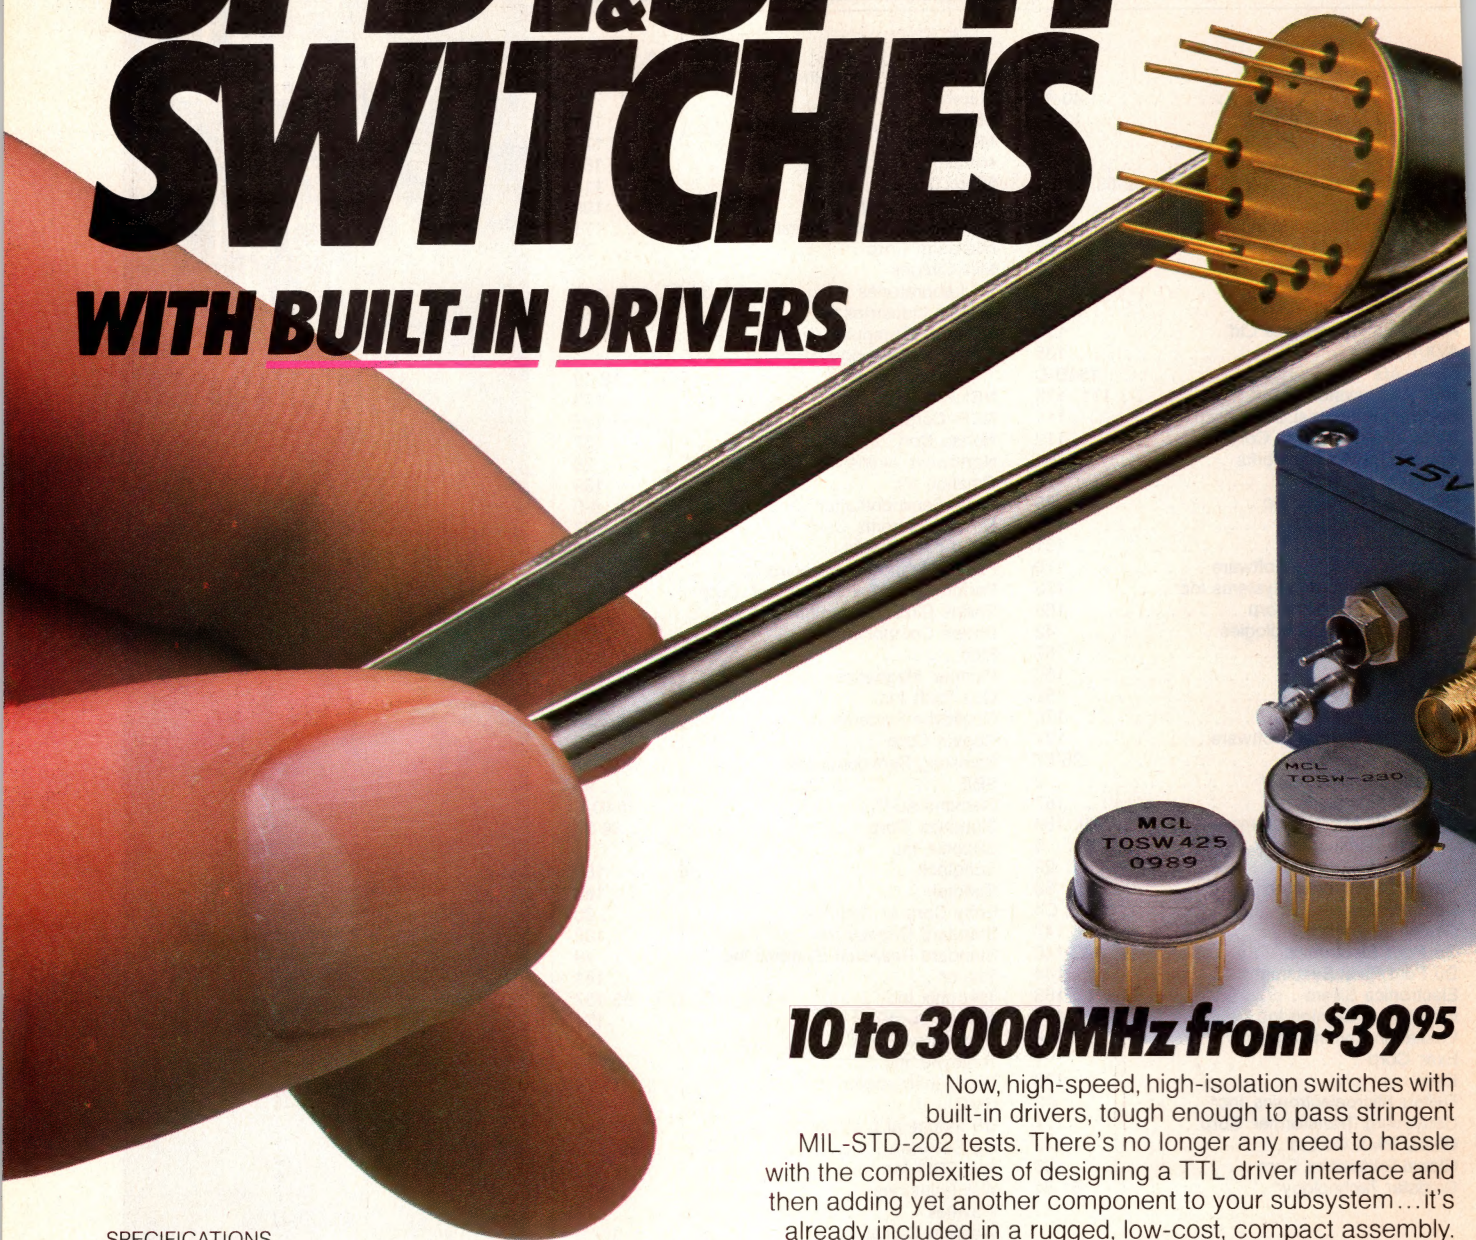

SPECIFICATIONS

	TOSW-230 ZSDR-230		TOSW-425 ZSDR-425	
Freq. Range(MHz)	10-3000		10-2500	
Insert. Loss (dB)	typ.	max.	typ.	max.
10-100MHz	1.3	1.9	1.3	1.7
100-1500MHz	1.1	1.9	1.1	1.7
1500-3000MHz	1.8	2.7	1.8	2.5
Isolation(dB)	typ.	min.	typ.	min.
10-100MHz	60	40	60	40
100-1500MHz	40	28	40	30
1500-3000MHz	35	22	35	22
1dB Compression(dBm)	typ.	min.	typ.	min.
10-100MHz	17	6	17	6
100-1500MHz	27	19	27	19
1500-3000MHz	30	28	30	28
VSWR(ON)	typ.	max.	typ.	max.
	1.3	1.6	1.3	1.6
Switching Time (μsec)	typ.	max.	typ.	max.
(from 50% TTL to 90% RF)	2.0	4.0	2.0	4.0
Oper. Temp.(°C)	-55 to +100		-55 to +100	
Stor. Temp.(°C)	-55 to +100		-55 to +100	
Price (10-24)	\$39.95		\$59.95	
(1-9)	\$89.95		\$109.95	

10 to 3000MHz from \$39⁹⁵

Now, high-speed, high-isolation switches with built-in drivers, tough enough to pass stringent MIL-STD-202 tests. There's no longer any need to hassle with the complexities of designing a TTL driver interface and then adding yet another component to your subsystem...it's already included in a rugged, low-cost, compact assembly.

Available in the popular hermetically-sealed TO-8 package or a small EMI-shielded metal connectorized case, these tiny PIN-diode reflective switches, complete with driver, can operate over a 10 to 3000MHz span with a fast 2μsec switching speed.

Despite their small size, these units offer isolation as high as 40dB(typ), insertion loss of only 1.1dB(typ), and a 1dB compression point of +27dBm over most of the frequency range. All models are TTL-compatible and operate from a dc supply voltage of 4.5 to 5.5 V with 1.8mA quiescent current.

Switch to Mini-Circuits for highest quality innovative products...and leave the driving to us.

finding new ways ...
setting higher standards


Mini-Circuits
A Division of Scientific Components Corporation

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156


WE ACCEPT AMERICAN EXPRESS

CIRCLE NO. 92


F126 REV.A

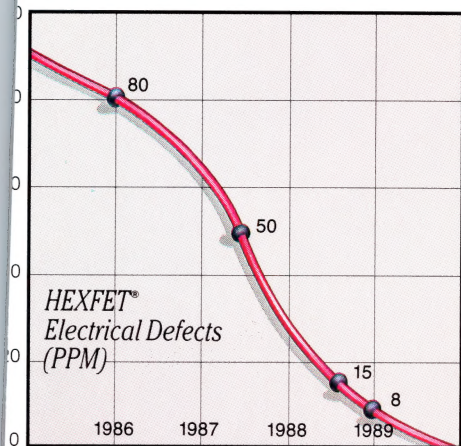

The Most Demanding AOQLs.

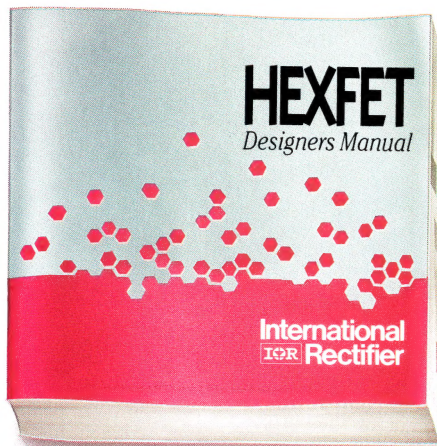

The Most Part Numbers.

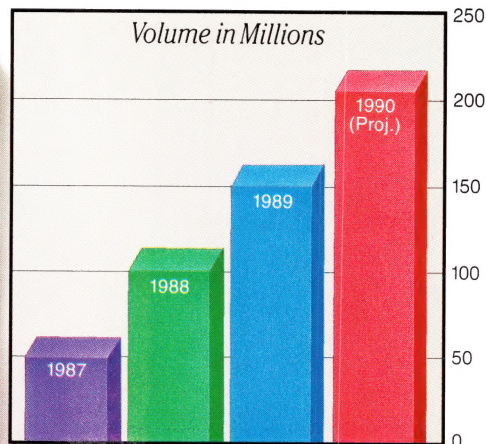

The Most Parts Shipped.

The MOST FETs.

If you're looking for the most from the power MOSFETs you design in, get IR HEXFETs. The power MOSFETs with more of everything.


Performance. Nobody has the outgoing quality levels IR has. Nobody has the electrical specs. The avalanche ratings. The reliability. Nobody.

Part Numbers. Nobody has a broader line than IR. And not just in

n-channel 60 to 1000v HEXFETs. We also offer p-channel, current-sense and logic level FETs in a variety of industry-standard and custom packages.

Volume. Year after year, almost twice as many IR HEXFETs are designed in, specified, ordered, and shipped as any other brand.


Making them the most wanted power MOSFETs in the world.

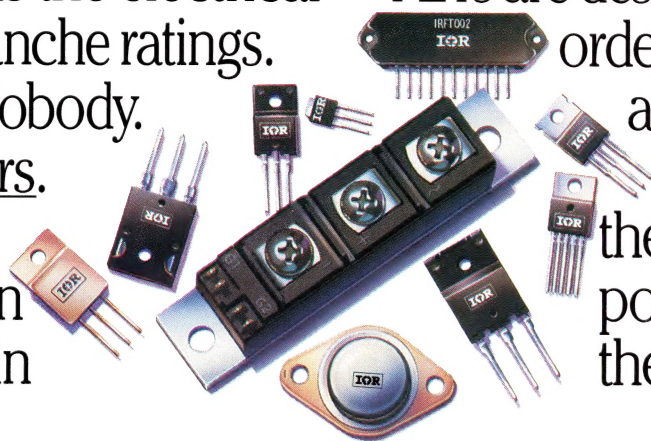

IR International Rectifier

WORLD HEADQUARTERS: 233 KANSAS ST., EL SEGUNDO, CA 90245, U.S.A. (213) 772-2000. TWX 910 348-6291, TELEX 472-0403. EUROPEAN HEADQUARTERS: HURST GREEN, OXTED, SURREY RH8 9BB, ENGLAND TELEPHONE (0883) 713215, TELEX 95219


NEW
2900 Programming System

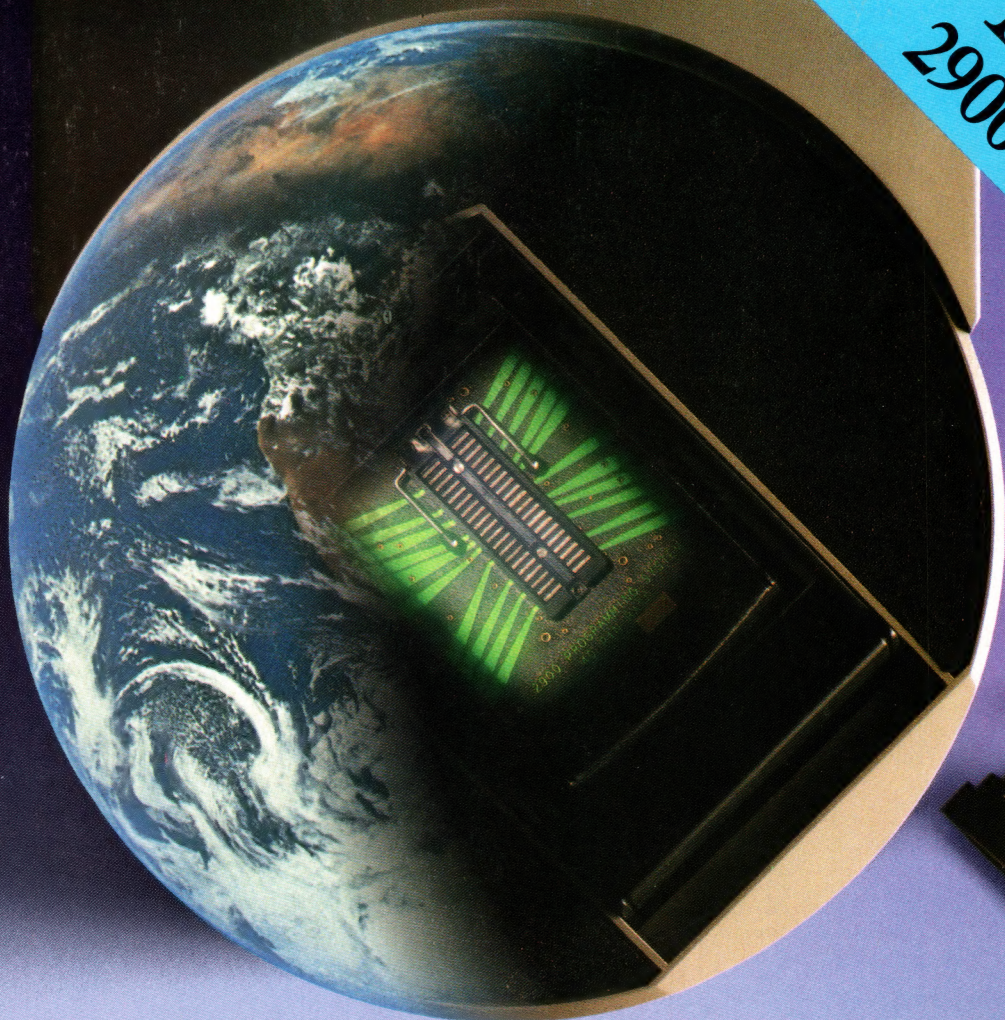

Out-of-this-world performance at a down-to-earth price.

The new 2900 Programming System brings the cost of high-performance programming down to earth. Buy only the device libraries you need today and expand capability when you need it with simple software updates.

The 2900 supports virtually every programmable logic and memory

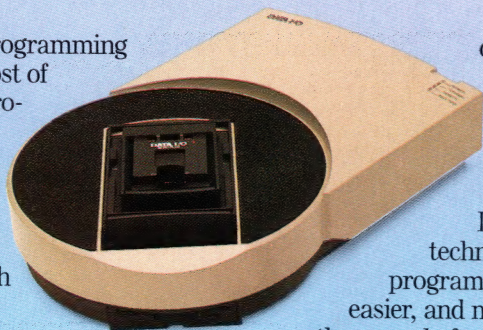

device on the market—even surface-mount packages.

Its innovative technology makes programming faster, easier, and more affordable than ever before. And with

Data I/O®'s industry-standard design and testing software, you can create a

complete PLD development solution.

For more than 15 years, Data I/O has set the standard in device programming. Call today to learn how the 2900 is setting a new standard for both price and performance.

**Call today for a
FREE tutorial.**

Programming
Today's Device
Technologies

DATA I/O

1-800-247-5700

Data I/O Corporation 10525 Willows Road N.E., P.O. Box 97046, Redmond, WA 98073-9746, U.S.A. (206) 881-6444/1-800-247-5700
Data I/O Canada 6725 Airport Road, Suite 302, Mississauga, Ontario L4V 1V2 (416) 678-0761
Data I/O Europe World Trade Center, Strawinskylaan 633, 1077 XX Amsterdam, The Netherlands +31 (0)20-6622866/Telex 16616 DATIO NL
Data I/O Instrument Electronic Systems Vertriebs GmbH Lochhamer Schlag 5A, 8032 Gräfelfing, W. Germany, 089-85-85-80
Data I/O Japan Sumitomosimei Higashishinbashi Bldg., 8F, 2-1-7, Higashi-Shinbashi, Minato-Ku, Tokyo 105, Japan
 (03) 432-6931/Telex 2522685 DATAIO J

©1990 Data I/O Corporation

CIRCLE NO. 94

DATA I/O
Corporation